

# Popular Science


★ FOUNDED **MONTHLY** 1872

RADIO SECTION

PAGE 82

—  
*How to build a 4-tube set to fit into your phonograph cabinet.*  
—

*Jack Binns tells how to tune any receiver*  
—*Hints for everybody.*

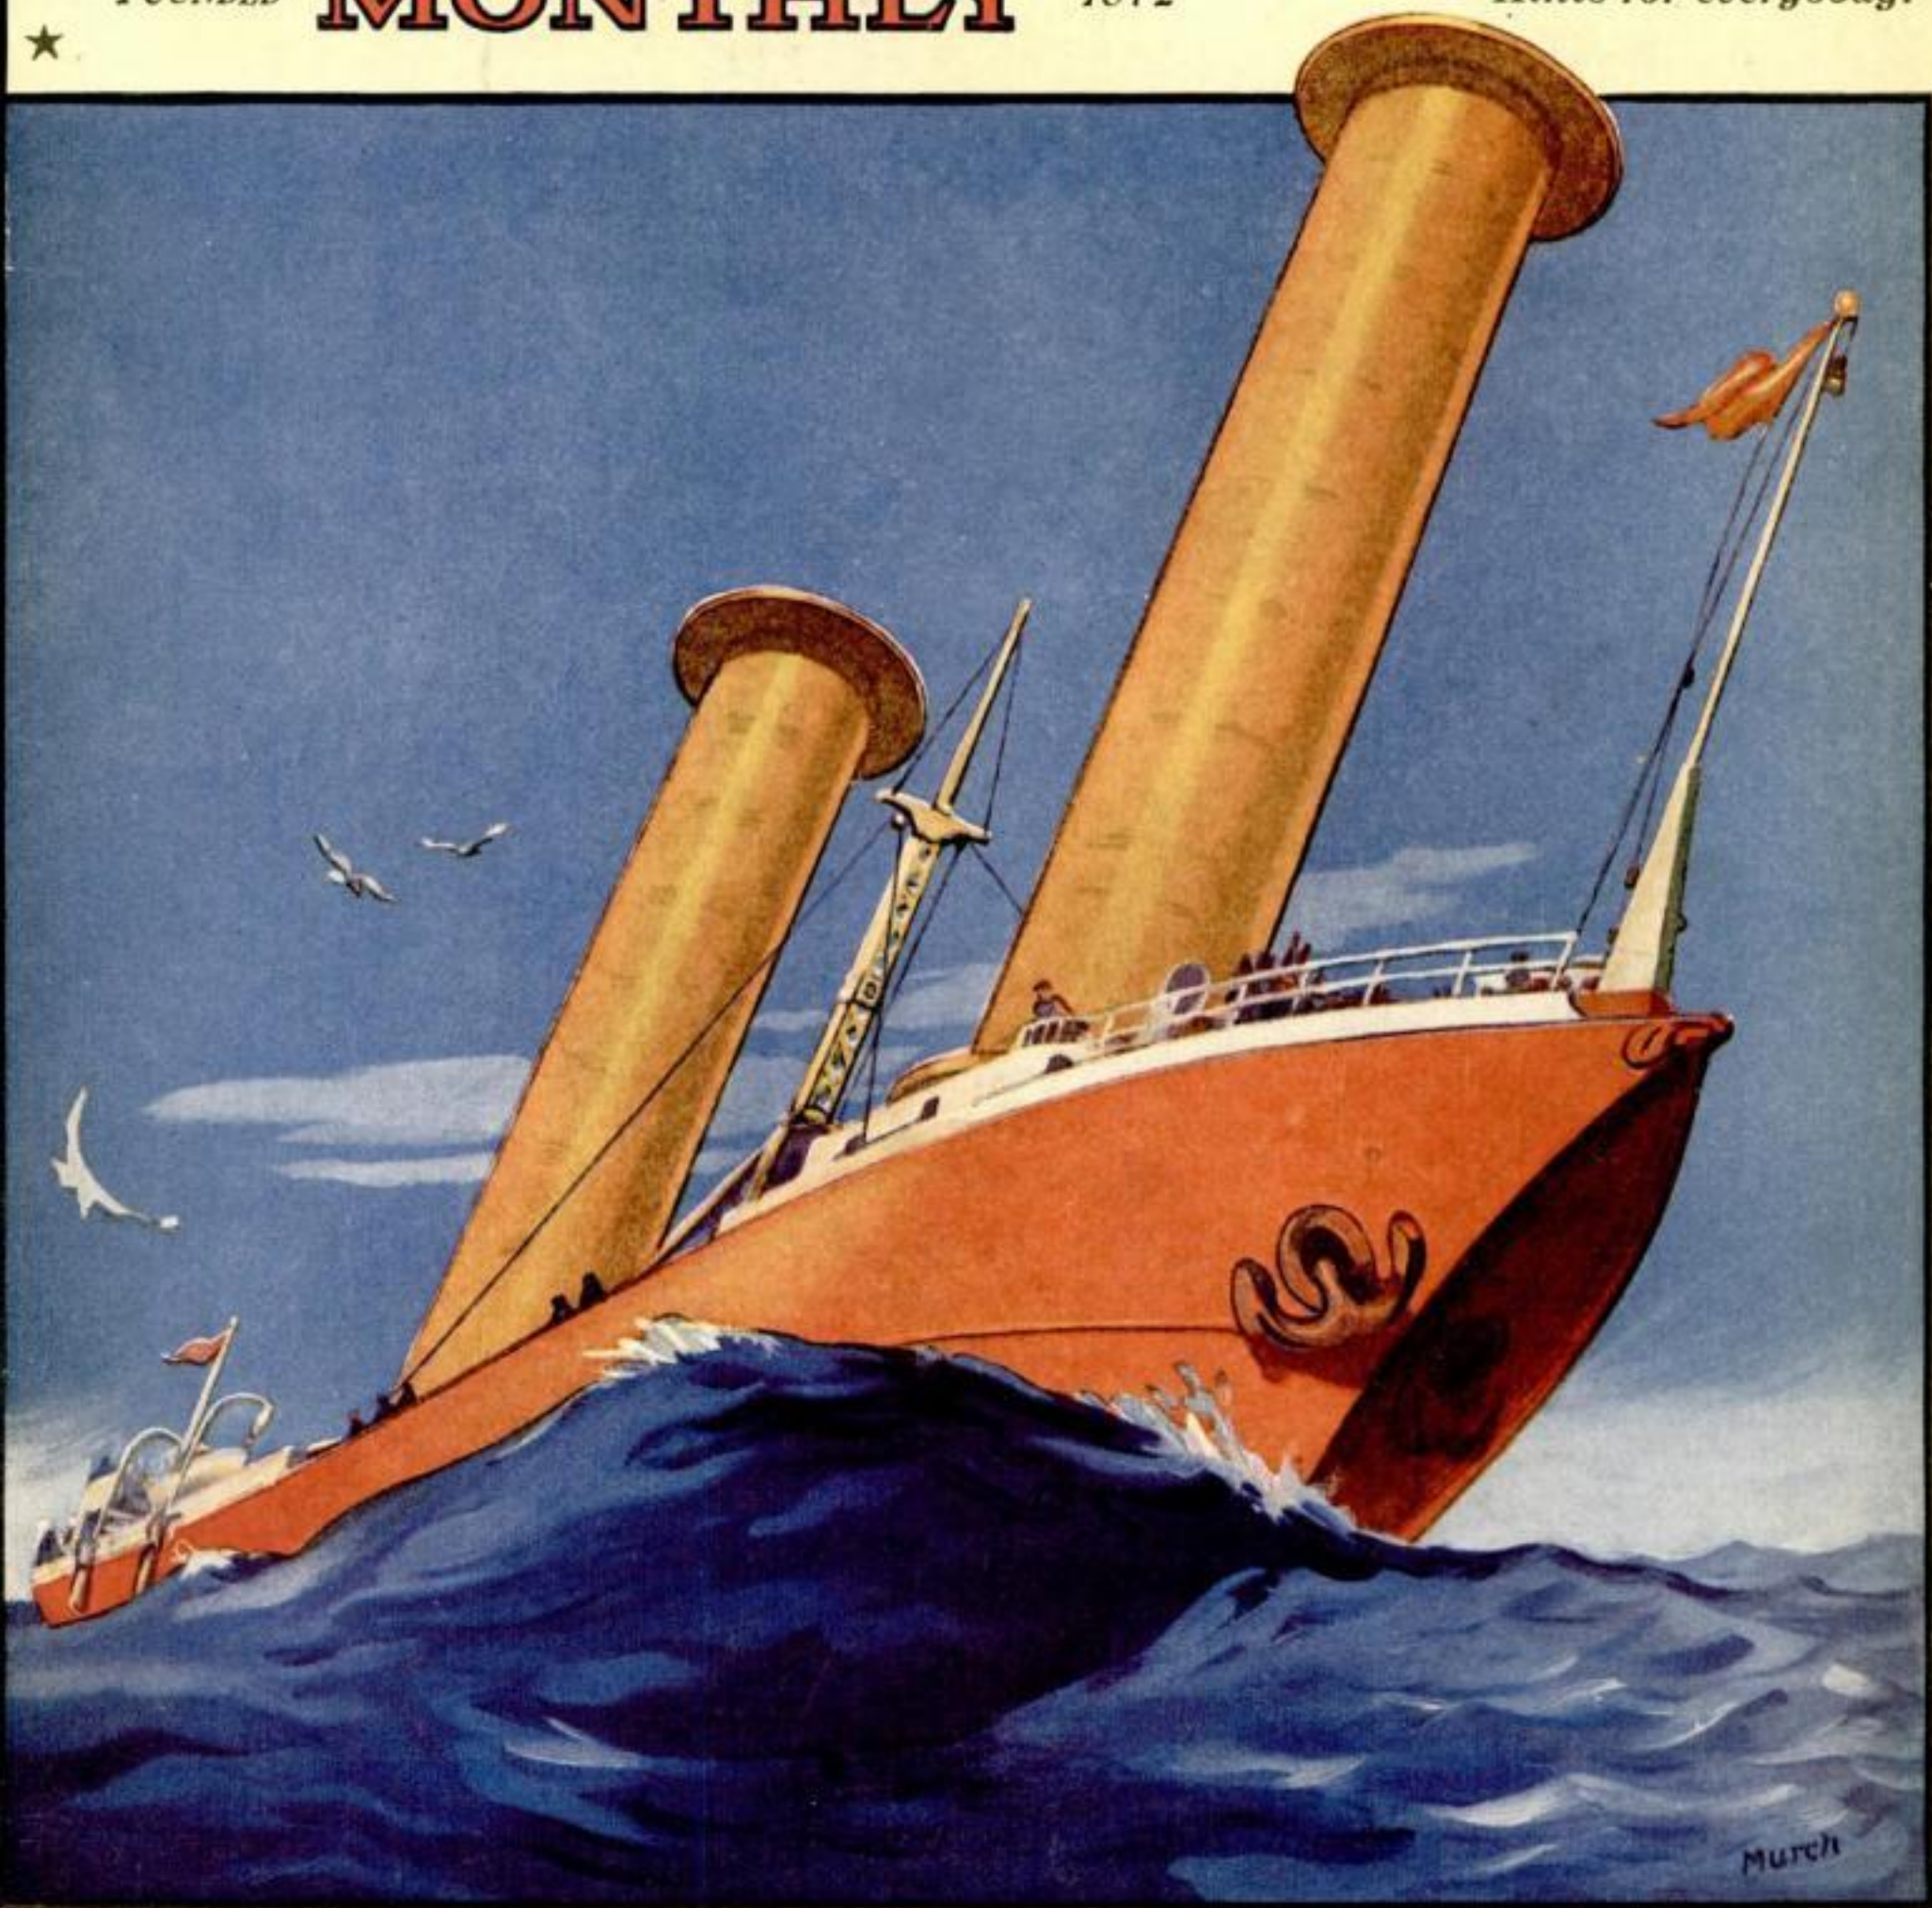

## The newest wonder of the seas—p. 35

FEBRUARY

Henry Ford's amazing vision of the future

25 CENTS

Copyrighted material





## *The "Super-Het" brings home the fun!*

### **Radiola Super-Heterodyne**

—gets distance with no antenna—no ground wires—no connections. Once mark the stations on the dials, and you can turn to the marked spots and tune in—clear—true—real!

Operates entirely on dry batteries.

With 6 Radiotrons UV-199 and Radiola Loudspeaker. With compartments to hold the batteries. Entirely complete except batteries

\$269

Extra  
Radiola Loop,  
Model AG-814,  
\$12

This symbol  
of quality



is your  
protection

Where's the fun today? At home, wherever there's a "Super-Het!" City home and farm home hear the same good music—laugh at the same good comedy—thrill to the same big games!

At the family dinner table, there's the dinner music of the greatest hotels. For home parties, famous orchestras play their best dance music. So many of the things that folks once went out of the home to get, come into the home now—with a Radiola Super-Heterodyne.

*"There's a Radiola for every purse"* <sup>®</sup>

### **RADIO CORPORATION OF AMERICA**

Sales Offices: Suite No. 112  
233 Broadway, New York  
10 So. La Salle St., Chicago, Ill.  
28 Geary St., San Francisco, Cal.

# Radiola

REG. U. S. PAT. OFF.



# 3 Tubes DO THE WORK OF 6



Crosley Trirdyn Special, \$75.00  
With tubes and Crosley Phones \$90.75

## In the CROSLEY Trirdyn

SINCE the inception of radio, the results obtained with Armstrong Regenerative Receivers have been the goal of comparison for all others. Trick circuits have been designed to get around the Armstrong Patent hoping to obtain results "just as good." This has resulted in the use of more tubes, necessary without, but unnecessary with regeneration.

This is one reason why Crosley Radios, licensed under Armstrong U. S. Patent No. 1,113,149 have performed everywhere so remarkably on so few tubes.

The Crosley Trirdyn, employing Armstrong Regeneration combined with tuned non-oscillating radio frequency amplification and reflexed audio frequency amplification and using only three tubes, consistently gives greater selectivity, more volume and wider range than can be obtained where five or six tubes are employed without regeneration. With no regeneration, two stages of radio frequency amplification, requiring at least two additional tubes, must be employed in front of the detector tube to get the same results as furnished by one tube where regeneration is used.

Every additional tube means additional expense; an added dial to tune, greater difficulty in operation, more distortion and more tube noises. The three tube Crosley Trirdyn has only two dials. These operate but two circuits, making tuning and logging very easy.

You can't beat the results obtained from an Armstrong Regenerative Crosley Radio. A trial will convince you.

**BEFORE YOU BUY—COMPARE  
YOUR CHOICE WILL BE A CROSLEY  
For Sale By Good Dealers Everywhere**

*Crosley Regenerative Receivers are licensed under Armstrong U. S. Patent 1,113,149  
Prices West of Rockies—Add 10%*

Write for Complete Catalog

### THE CROSLEY RADIO CORPORATION

Powel Crosley, Jr., President

217 Sassafras St.

Cincinnati, Ohio

Crosley Owns and Operates Broadcasting Station WLW


Crosley Trirdyn Newport, \$100.00  
With tubes and Crosley Phones \$115.75



Crosley One Tube  
Model 50, \$14.50  
With tube and Crosley Phones \$22.25




Crosley Two Tube  
Model 51, \$18.50  
With tubes and Crosley Phones \$30.25



Crosley Three Tube  
Model 52, \$30.00  
With tubes and Crosley Phones \$45.75

### CROSLEY Better—Costs Less Radio

Crosley  
Head Phones  
Better—Cost Less  
\$3.75

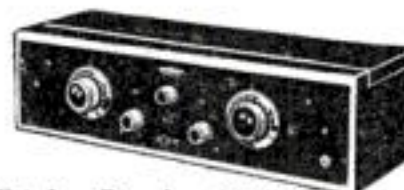

Crosley Trirdyn Regular, \$65.00  
With tubes and Crosley Phones \$80.75



Mail  
This  
Coupon  
At Once

The Crosley  
Radio Corp'n  
217 Sassafras St.  
Cincinnati, O.  
Mail me, free of  
charge, your catalog  
of Crosley receivers  
and parts

Name \_\_\_\_\_

Address \_\_\_\_\_



# Popular Science Monthly

Most Wonderfully Illustrated Magazine in the World

FEBRUARY, 1925; Vol. 106, No. 2

25 cents a Copy; \$2.50 a Year



Published in New York City at  
250 Fourth Avenue

## Coming Next Month

**Why everybody is doing cross-word puzzles**—A noted psychologist's explanation of one of the most amazing "crazes" that ever has intrigued the minds of Americans. Also—a new and unusual kind of cross-word puzzle that will test your skill.

**He built his house single-handed**—How a Long Island bank employee erected his home in odd hours, laying every brick and driving every nail with his own hands. An unusual story of an unusual hobby.

**Tremendous loudspeaker volume on two tubes**—Alfred P. Lane, POPULAR SCIENCE MONTHLY's radio editor, has just completed a marvelous two-tube reflex set that he says he can hear all over the house. Even with only one tube going, he says it gives ample loudspeaker volume on local stations. In next month's issue he will tell you how to build it.

**How to adjust your carburetor**—Do you know how to do it so as to get the most power from your engine with the least fuel consumption? An automobile expert gives valuable hints on this little understood subject.



John C. Ketcham, Long Island bank employee, laying the brick foundation for the home he built entirely by his own labors. A fascinating article next month will tell how he emerged from this job as a fully apprenticed bricklayer and carpenter.

**And more than 200 other fascinating articles and pictures, giving you all the news of radio and engineering, science and invention, strange and unusual things people are doing, together with practical ideas for the automobile, the home, the home workshop, and the use of tools and machinery.**

## In This Issue

	Page
Popular Science Institute of Standards	33
A Sailing Ship without Sails.....	35
By G. B. Seybold	
Henry Ford's Vision of the Future..	37
By Raymond J. Brown	
Automatic Secretary Talks to Callers	40
By Truman Stevens	
Why I Read POPULAR SCIENCE MONTHLY. A Prize Contest Announcement.....	40
Sky Superdreadnaught.....	41
Radio Photos Cross the Sea.....	42
By Robert E. Martin	
Sinking a \$30,000,000 Dreadnaught..	44
How Rapidly Can You Think?.....	45
By Donald A. Laird, Ph.D.	
Sunken Riches Lure Adventurers....	46
A Thrilling Spill on the Speedway....	48
Automatic Control for Railroads.....	49
By Norman C. McLoud	
Artificial Throats for Cancer Sufferers	50
Newest Locomotive Marvels.....	51
Uncle Sam's Two-Cent Trails.....	52
First Aid for Your Family.....	54
Gay Deceivers among the Insects....	55
Crash of Electrons Heard.....	56
Soldering Outfit for Linemen.....	58
An Automatic Traffic Cop.....	58
Fighting Mine Dust with Cannon....	59
Office Desk Built on Sectional Plan..	59
Kitchenette in a Small Cabinet.....	60
An Adjustable Desk Chair.....	60
A Self-Standing Golf Bag.....	61
An Auto Sponge that Stays Wet.....	61
Oddities Found by the Camera Man..	62
Diesel Engine Runs Locomotive.....	64
Electric Milk Truck.....	64
New Type of Lightship.....	64
Twin Motors Drive Hydroplane.....	65
Railway Car Propelled by Motorcycle	65
Dummy Tests Air-Mail Parachutes..	66
Smallest Plane Weighs 221 Pounds....	66
Portable Searchlights Guide Fliers....	67
Air Freighter Carries 2700 Pounds....	67
New Ideas for Busy Offices.....	68
Automobile Ferries Relieve Traffic	70
Schoolhouse Moved by Water.....	70
Mammoth Defense Gun.....	71
America's Most Active Volcano.....	71
The Wilson Dam at Muscle Shoals....	72
Harnessing Small Streams for Power..	72
Everest Climbers Bridge Chasms.....	73
Adding to the Motorists' Pleasure....	74
How Frozen Eggs Are Canned.....	76
Ship's Blocks Are Tested.....	76
Fossils Reveal Oil Deposits.....	76
Testing Blended Motor Fuels.....	77
Seeks New Cures by Radio Waves....	77
Mechanical Cabinetmaker.....	78
How Much Science Do You Know?....	78
Mechanical Merry-Go-Round.....	79
New Type of Windmill.....	79
Know Your Car.....	79
New Inventions for the Household..	80
How Wireless Steers Vessels.....	82
Your Dials—Keys to the Air.....	83
By Jack Binns	
How to Do Good Soldering.....	85
By John Carr	
Set to Fit Phonograph Cabinet.....	86
By Alfred P. Lane	
How Radio Gyps Duped Me.....	88
As Told to Newton Burke	
The Month's Radio Curiosities.....	89
Skidding—How to Avoid It.....	90
Saving Auto Repair Costs.....	92

The Home Workshop..... 93  
Better Shop Methods..... 98

And other timely articles and pictures


### \$75 in Prizes

For the best letters on "Why I Read POPULAR SCIENCE MONTHLY," \$25 in prizes. Turn to page 40.  
For the best photos of your handicraft, \$50 in prizes. Turn to page 130.

## POPULAR SCIENCE MONTHLY

Issued monthly. Single copy, 25 cents. Yearly subscription to United States, its possessions, and Canada, \$2.50; foreign countries, \$3. Entered as second-class matter Dec. 28, 1918, at the Post Office at New York under the act of March 3, 1879. Entered as second-class matter at the Post Office Department, Canada. Printed in U. S. A. Copyright, 1925, by the Popular Science Publishing Co., Inc. The contents of this magazine must not be reprinted without permission. In presenting in its editorial columns numerous stories of new products of applied science, POPULAR SCIENCE MONTHLY does not underwrite the business methods of the individuals or concerns producing them. The use of POPULAR SCIENCE MONTHLY articles, or quotations from them for stock-selling schemes is never authorized. H. J. Fisher, President; R. C. Wilson, Vice-President; O. B. Capen, Secretary and Treasurer.



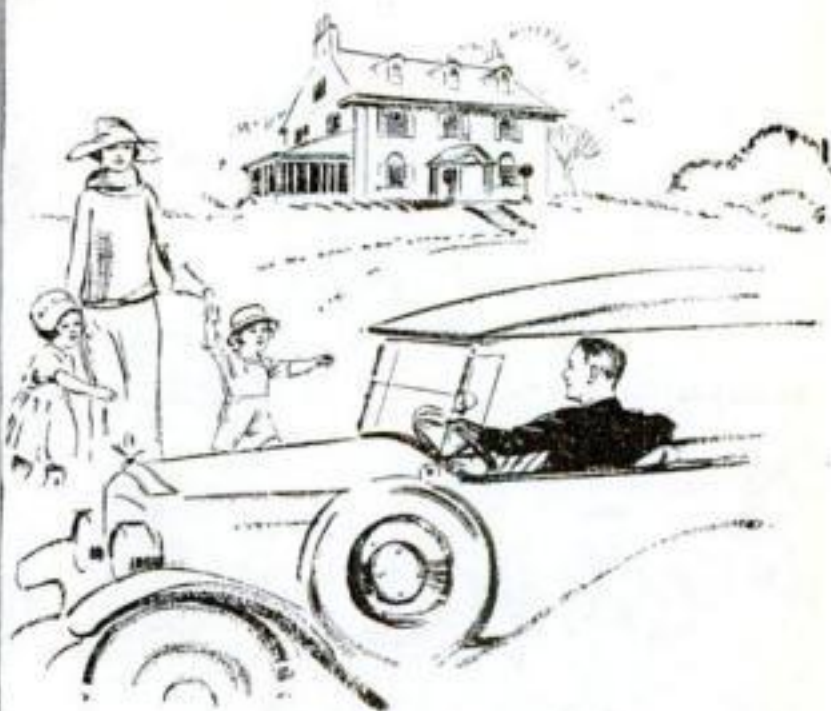

# A Personal Message to Men Who Want to Earn More than \$7,000 Every Year

By J. E. Greenslade

**W**HEN a civil service clerk earning only \$25 a week suddenly surprises his friends by increasing his earnings to nearly \$200 a week—when a farm hand earning only \$60 a month begins to earn \$1,000 a month—when a railway mail clerk earning \$1,600 a year changes his job and earns \$1,000 in thirty days—when hundreds of others quickly jump from small pay to magnificent earnings—then blame yourself if you do not do equally well.

There is nothing exceptional about any of these men. They'll tell you that themselves. Many had been clerks, bookkeepers, me-

chanics, farm hands—in fact, they came from all walks of life. And then in a very short period of time they found themselves making more money than they had ever dreamed possible. Today they know the thrill of money-making.

## I Pledge You My Word You Can Do It

What these men have done, hundreds have done, hundreds are doing today, and hundreds will do tomorrow. And *you* can be one of them. The same opportunity is yours with no possibility of your failing to do equally as well if you follow my advice.

But first let me tell you why the same opportunity exists for you. During 1923 the National Salesmen's Training Association received requests for more than 50,000 salesmen from wholesalers, manufacturers, and jobbers—representative concerns all over the United States and Canada. Surely that is a tribute to the manner in which we train men for Master Salesmanship.

There are countless openings for men who really know how to sell—unlimited opportunities to make real money. And once you possess the secrets of Master Salesmanship you, too, can do equally as well as any of the men mentioned on this page.

## A Foolish Notion About Salesmen

For some reason the average man imagines that, in order to make good in selling, he must be a "born" salesman. Nothing could be further from the truth. There is no such thing as a "born" salesman.

There are certain principles, certain rules, certain secrets to selling just as there are certain principles in mathematics and medicine. Once you know these principles you can quickly make good in the selling profession.

And through the National Demonstration Method—an exclusive feature of our System of Training—you gain the equivalent of actual experience in overcoming sales problems of all descriptions. Then, through the N. S. T. A. System of Electives, you get

the proved selling plans of Master Salesmen in the line or lines you want to sell.

Step by step this result-securing system of salesmanship training takes you through every phase of selling, and secrets of selling that have made millions of dollars are unfolded to you in a manner so simple and easy as to be immediately grasped.

Then there is the Free Employment Service at your disposal when you are qualified and ready.

## Remarkable Book, "Modern Salesmanship" Sent—FREE

With my compliments I want to send you a most remarkable book, "Modern Salesmanship." It will show you how you can easily become a Master Salesman—a big money-maker—how the N. S. T. A. System of Salesmanship Training will give you the equivalent of years of selling experience in a few weeks; how our Free Employment Service will help you select and secure a good selling position when you are qualified and ready. And it will give you success stories of former routine workers who are now earning amazing salaries as salesmen. Mail the coupon today. It may be the turning point in your life.

## NATIONAL SALESMEN'S TRAINING ASSOCIATION

Dept. 15-B  
N. S. T. A. Buildings, 1139 No. Dearborn  
CHICAGO, ILL.



National Salesmen's Training Association  
Dept. 15-B, N. S. T. A. Buildings,  
1139 No. Dearborn, Chicago, Ill.

Send me FREE your book "Modern Salesmanship," and proof that I can become a Master Salesman.

Name.....

Address.....

City..... State.....

Age..... Occupation.....

### Earns \$1,350 a Month

"Last month, I earned \$1,350 as a salesman. Have averaged \$1,000 a month the last year. I couldn't have done it without N. S. T. A. training."—A. H. Ward, Chicago.

### \$1,000 in 30 Days

"After ten years in the railway mail service I decided to make a change. My earnings during the past thirty days were more than \$1,000."—W. Hartle, Chicago, Illinois.

### First Month \$1,000

"The very first month I earned \$1,000. I was formerly a farmand."—Charles Berry, Winterset, Iowa.

### \$524 in 2 Weeks

"I have never earned more than \$60 a month. Last week I cleared \$306 and this week \$218."—Geo. W. Kearns, Oklahoma City.

### City Salesman

"I want to tell you that the N. S. T. A. helped me to a good selling position with the Shaw-Walker Company."—Wm. W. Johnstone, Jr., S. Minneapolis, Minn.

### \$554.37 in One Week

"Last week my earnings amounted to \$554.37; this week will go over \$400."—F. Wynn, Portland, Ore.

### \$100 a Week in Only 3 Months

H. D. Miller, of Chicago, made \$100 a month as stenographer in July. In September, 3 months later, he was making \$100 a week as a salesman.

### \$10,000 a Year

O. H. Malfroot, of Boston, Mass., stepped into a \$10,000 position as a SALES MANAGER—so thorough is this training.





Just give me 5 minutes of your time and I will prove to you that almost every man possesses the natural gift of powerful speech. A gift which brings money, advancement, popularity, and success in an amazingly short time. I will show you how to bring out this "hidden knack" and to overcome stage fright, self-consciousness, timidity, bashfulness. You can do all this quickly, easily and surely by giving me only 15 minutes a day in the privacy of your home. -

## AMAZING 5 MINUTE TEST PROVES 7 Men out of 9 have this "Hidden Knack"!

**T**ESTS have shown that seven men out of every nine possess the natural gift which makes men rich. But few realize that keeping this knack hidden is the thing that holds them back when others, of lesser ability, get what they want by the sheer power of speech alone. I'll show you how to bring out this powerful "knack" and use it to quickly gain advancement in position and salary, popularity, leadership, success.

### A Secret That Has Made Men Rich

Opportunity follows the man who can talk impressively and convincingly. Things invariably come his way. When there is a big, important, high-salaried position to be filled, he is the man who is asked to take it while often men of greater ability are passed by unnoticed.

In every line of business the big jobs go to the man who can dominate and control others. The man who can sway others and bend them to his will, whether it be one man or an audience of thousands, is the man who is constantly being sought for positions of power and leadership.

### Now Easy For Anyone To Become A Powerful Speaker

Thousands of men have found it amazingly easy to quickly become powerful speakers. You do not need a college education, nor previous voice training. A few surprisingly simple, easy to remember principles can readily be grasped in a few minutes each day. There is no mystery about becoming a powerful speaker. Anyone can do it.

You have often felt something rise up within you and demand expression. That is the "hidden knack" which, when brought out in this new and easy way, causes an unknown to jump to the head of a great business; an obscure salesman to suddenly rise to the desk of salesmanager; a bashful, timid man to become a popular after-

dinner speaker and platform lecturer.

### It Takes Only 15 Minutes A Day

I don't care how embarrassed you are when called upon to speak; I don't care how timid or bashful you become when in a social gathering. Give me fifteen minutes a

#### What 15 Minutes a Day will Show You

- How to talk before your club or lodge.
- How to address board meetings.
- How to propose and respond to toasts.
- How to make a political speech.
- How to tell entertaining stories.
- How to make after-dinner speeches.
- How to converse interestingly.
- How to write better letters.
- How to sell more goods.
- How to train your memory.
- How to enlarge your vocabulary.
- How to develop self-confidence.
- How to acquire a winning personality.
- How to strengthen your will-power and ambition.
- How to become a clear, accurate thinker.
- How to develop your power of concentration.
- How to be the master of any situation.

day for only a few weeks and I will guarantee to make you a forceful, convincing and impressive speaker—or it will not cost you a single penny. I'll show you how to make yourself the dominating figure in any gathering; how to speak with confidence and force in business conferences, at banquets, in the lodge hall, at public gatherings, on the lecture platform. I will show you how to bring out your "hidden personality" and turn it into a dominating and commanding one through the power of speech alone.

### This FREE Test Will Measure Your "Hidden Knack"

There is a simple, easy, five minute test by which you can discover whether you possess this "hidden knack" that has made men rich. It will show you how this natural ability can be brought out by my unusual scientific training. How it can be used to quickly win you salary increases, business advancement, popularity and recognition. If you will fill in and mail the coupon below, I will send you this astonishing test FREE. Test your own ability—the results will astound you. But send today before this offer is discontinued. It may be the biggest step toward advancement and success that you will ever make.

#### NORTH AMERICAN INSTITUTE

3601 Michigan Ave. Dept. 1362, Chicago, Ill.

#### NORTH AMERICAN INSTITUTE

3601 Michigan Ave. Dept. 1362  
Chicago, Ill.

Please send me your FREE Test and full information about your amazing new method of learning Public Speaking. This request places me under no obligation of any kind.

Name.....

Address.....

City.....State.....



# Electricity Pays Cooke Trained Men \$3500 to \$10,000 a Year

**S**TEP out of your small-pay, no future job. Electricity wants you. The most interesting and best paying work in the world is calling you. Get ready now to earn \$70 to \$200 a week — you can do it in a few short months' time. I will train you at home and you can pay for your training with spare time work. My Course pays its own way. And Electricity Pays Cooke Trained Men \$3500 to \$10,000 a year.

## Electrical Experts Needed Everywhere

Even common, ordinary electricians earn \$8 to \$10 a day. You know that yourself. They have short hours and pleasant work. But here is your opportunity for even a better job. Be an Electrical Expert and boss the big jobs—get the expert's pay—\$12 to \$30 a day—\$3500 to \$10,000 a year.

## Why Salaries Are High in Electricity

The whole world is rapidly being electrified. In this country alone nearly a million and a quarter homes are being wired for electric light every year. Hundreds of the biggest power houses are being built. Entire railroad systems are replacing steam with electricity. Thousands of Factories—Hundreds of Mines—15 Million Automobiles—5 Million Radio Outfits—all depend on electricity, and men who are trained to handle it. Right now, there is a big shortage of trained men and more and more are needed every year. That's why salaries are high in electricity and why they will stay high and even go higher. Electricity is the ONE BIG PAY FIELD and it is open to you now.

## Don't Let Lack of Experience Hold You Back

Don't rob yourself of the things you want—the joys and comforts of life—just because you may not know anything about electricity now. The thousands of big successful men I have already trained were clerks, mechanics, laborers, farm hands, etc., when they started—they knew nothing about Electricity either. But that doesn't keep them from making big money today. Don't let age or lack of education or experience hold you back. If you can read and write I can train you to earn \$70 to \$200 a week and I will guarantee your satisfaction with a signed money back guarantee bond.



## Be an Electrical Expert I will train you at home and help you make extra money while learning



L. L. COOKE,  
Chief Engineer.  
America's Most  
Successful Teacher  
of Electricity

**Y**OU want to earn big money. You want to get into a line of work where there is a constant and increasing demand for men. You can do it—Easy. Electricity needs you and Cooke Trained Men easily earn \$3500 to \$10,000 a year.

Cooke Training gives you quick action. You start earning extra money at once, while you keep on with your present job. You don't wait 'til a year from now to cash in on what you learn. You get the extra money right after you start. I show you how to get and how to do spare-time electrical jobs right in your own neighborhood on which you get valuable practical experience. While you are learning to fill the expert's job which will pay \$3500 to \$10,000 a year, you earn many times more than the monthly payments on my Course. Send for my free book today and get the whole big story of your opportunities in Electricity—THE BIG PAY FIELD.

## I Will Tell You More In My Big Free Book

Send the coupon for my free book "The Vital Facts About Electricity." In it are the fourteen big reasons why I can train you better than anyone else—Why "Cooke" Students' Service has revolutionized home-study training—The letters of over 100 men who earn up to \$12,000 a year—How you too, can get a big pay job in electricity in a few months' time—64 pages and over 150 pictures. Take your first step into the ranks of big-pay men today. Start succeeding this minute—Send for my free book, which tells you all about it—NOW.

L. L. COOKE, Chief Engineer  
Chicago Engineering Works  
Dept. 32 2150 Lawrence Avenue  
CHICAGO, U. S. A.

Mail  
this  
Coupon  
for my  
FREE  
BOOK

L. L. COOKE, Chief Engineer, Chicago Engineering Works, Dept. 32, 2150 Lawrence Avenue, Chicago, U. S. A.  
Send me your book, "The Vital Facts About Electricity," full particulars of your Home Study Course, and your fourteen guarantees including your plan for helping me earn extra money while learning. This does not obligate me to enroll for your Course.

Name .....

Address .....

City.....State.....

**The "COOKE" Trained Man is the "Big Pay" Man!**



# American School Now Guarantees Its Students A Job and 50% More Pay!



**If You Earn \$40 Per Week or Less Read Every Word of This Message!**

If you are earning \$40 a week or less, the American School guarantees under bond to secure you a job, in your chosen line of work, which will pay you at least 50% more money — or to return every cent paid on your course. Think of it! A job — and half-again as much pay — absolutely guaranteed! It sounds almost too good to be true. But remember: this guarantee is made by one of the oldest and most highly regarded EDUCATIONAL INSTITUTIONS in America, with a million dollars in resources to back its guarantee. Furthermore, the American School is the only correspondence school chartered not for profit! Because it is not a money-making enterprise, this School gives such complete and thorough instruction that it can well back its training with

## The Most Binding Guarantee of Results Ever Made

For more than a quarter of a century we have trained men for better jobs and bigger pay. Our files are filled with letters from students who have achieved success through our training. For years our employment department has been securing big-pay jobs for our students in all parts of the country. We know that our training will fit any man — regardless of age, education or experience — for a bigger job in his chosen line of work. We know how and where to get him that job. So our binding guarantee of a job and a 50% raise or your money refunded is merely guaranteeing to do what we have been doing right along. We are putting American School training on a guaranteed basis, the

same as any reputable manufacturer guarantees his merchandise.

Our merchandise is training. Our students take this training to make more money. We guarantee the results — a job and a 50% raise — that's all there is to it. This revolutionary guarantee does away with all chance or guesswork, and carries you straight through to sure success — a guaranteed job at a big raise in pay.

**Quick, Sure, Guaranteed Success** Here indeed is the biggest opportunity any ambitious man ever had!

No need to waste your time any longer in a small-pay, futureless job. No need to experiment with ordinary and uncertain methods of training. No matter what your plans or ideas may be regarding training in any line of work — get the facts on this new-day, guaranteed system of training before you decide. Don't risk your time and money on uncertain claims and promises. Don't gamble with your future. Life is too short. Take this quick, sure and guaranteed route to the job you want at the pay you want.

## Mail Coupon For Full Facts On This Guarantee

Write now, today, and tell the American School in what line of work you want a big-pay job. Let us show you how, when you put yourself in our hands, we quickly and thoroughly fit you for the job — then get it for you. With the 50% raise in pay that we guarantee you to start on, there is practically no limit to your success.

You are face to face with the biggest opportunity of your life — the coupon below. Fill it in now, and mail it today. It will bring you the complete story of American School training and what it can do for you, together with a guarantee bond of a splendid position in your chosen line of work, that will pay you at least 50% more money. For the sake of your dollars-and-cents future, investigate this offer today. Check on the coupon the line of work in which you want a big-pay job, sign your name and address and mail it NOW.

**AMERICAN SCHOOL**  
Dept. G-275, Drexel Avenue & 58th Street  
CHICAGO, ILLINOIS

### AMERICAN SCHOOL

Dept. G-275, Drexel Ave. & 58th St., Chicago

Send me full information on your guarantee of a job and 50% raise and full details on the subject checked.

..Automotive Expert ..Electrical Expert  
..Business Manager ..Civil Engineer  
..Building Contractor ..Architecture  
..Mechanical Engineer ..Complete Law  
..Structural Engineer ..Steam Engineer  
..Machine Drafting & Design

Name .....

Address .....

Occupation .....



## Learn to Draw at Home

### New Method Makes It Amazingly Easy

Trained artists earn from \$50 to over \$250 a week. Tremendous demand right now for good art work. Magazines, newspapers, advertisers, printing houses, etc.

Become an artist through wonderful new easy method — right at home in spare time. Learn Illustrating, Designing and Cartooning. Actual fun learning this way. Individual attention by mail from one of America's most famous artists. Learn to draw and earn big money.

### Send for FREE BOOK

Just printed — a new book which describes the latest developments and wonderful opportunities in Commercial Art, and gives full details on this new easy method of learning to draw. Tells all about students — their successes — what they say — actual reproductions of their work — and how many earned big money even while learning. Write for this Free Book and details of special free offer. Mail postcard or letter now.

**WASHINGTON SCHOOL OF ART**  
Room 242 C. 1115-15th St., N. W. Washington, D. C.



## BE A RAILWAY TRAFFIC INSPECTOR

### MEN WANTED! POSITIONS GUARANTEED

Earn Up to \$250 per Month, Expenses Paid

Big demand for trained men in this fascinating, new profession. Many splendid opportunities thru contact with railway officials. Travel or remain near home. Pleasant, healthful outdoor work.

Start at \$110 per Month with expenses paid. Prepare in three months' spare-time study at home. Any average man can easily qualify.

### POSITION GUARANTEED

If, after completing preparation, we do not secure for you a position paying at least \$110 a month and expenses, we refund your enrollment fee in full. YOU TAKE NO RISK.

Investigate Now. Send coupon for free booklet No. D-64 today.

**STANDARD BUSINESS TRAINING INSTITUTE**  
Buffalo, N. Y.

Standard Business Training Institute, Buffalo, N. Y.

Send me, entirely free, booklet No. D-64 giving full particulars about course in Railway Traffic Inspection.

Name .....

Street .....

City .....

## Wrestling Book FREE



Learn to be an expert wrestler. Know scientific wrestling, self-defense, and jiu-jitsu. Develop a splendid physique, and have perfect health. Join this popular school and learn by mail. The famous world's champions — the marvelous

**Frank Gotch and Farmer Burns**

offer you a wonderful opportunity. Wrestling is easily and quickly learned at home by mail. Men and boys write now for splendid free book. Learn all the science and tricks. Be able to handle big men with ease. Accept this wonderful offer NOW. Send for free book today, stating your age.

Farmer Burns School of Wrestling, 1782 Range Bldg., Omaha, Neb.



## A Business for All

A permanent business. Large, quick profits for Men and Women. Work anywhere, full or part time. Everyone a prospective customer. \$25.00 to \$45.00 weekly. Clean, dignified work. Learn in 10 lessons, no experience necessary. A real chance to build a permanent Art business worth while. We furnish outfit. Free literature.

**TANGLEY CO.**  
103 Main, Muscatine, Iowa



# Learn Electricity

*in Great Shops!*



**Not by Correspondence  
All PRACTICAL Work at**

## COYNE

### IN 12 WEEKS

## Earn \$60 to \$200 a Week

Why work at dull uninteresting work, at low pay, with no future? In 12 weeks I will train you for a big pay job where you can command \$60 to \$200 a week as a COYNE TRAINED MASTER ELECTRICAL EXPERT or you can go in business for yourself with very small capital and make up to \$15,000 a year. Men trained as I train them are in demand everywhere. The great development of the Electrical industry makes the demand for trained men tremendous. Big opportunities and advancement for those who prepare now. The Coyne school was founded 26 years ago and my thousands of SUCCESSFUL GRADUATES are living proofs of what my training can do for ANY AMBITIOUS man. Many of these fellows will tell you in my big free book what Coyne has done for them.

### Complete Electrical Training in 12 Weeks

I train you thoroughly on the greatest outlay of ACTUAL ELECTRICAL machinery ever assembled in any school. You work with your hands on all kinds of Electrical apparatus, door bells, house wiring, armatures, switchboards, dynamos, everything to make you an all around ELECTRICAL EXPERT. This REAL WORK with REAL tools, on REAL machinery trains you many times FASTER, many times MORE THOROUGH than trying to learn in the field or by books or lessons.

### No Books—No Lessons—No Classes —You Do Actual Work!

I do not attempt to teach you by books or lessons. I train you to work with your head and hands on the same kind of Electrical Machinery used in power houses, industrial plants and on the outside, under actual working conditions, with instructors at your side. I have no classes, every student gets individual training.

### Free Radio and Auto Course

For a short time only I am including ABSOLUTELY FREE my big new Radio Course and Auto, Truck and Tractor Electrical Course.

## COYNE

**Electrical School**

1300-1310 W. Harrison St., Dept. 136-2, CHICAGO, ILL.

### You Don't Need Education or Experience

You don't need a lot of schooling to master my course. You don't have to be a high school graduate or even a grammar school graduate. My method of instruction is clear and plain, and yet thorough, and if you can understand plain English I will make you an electrical expert even though you haven't a lot of education or any previous electrical experience.

### Coyne Trains You For Life

You can get a free life scholarship which enables you to stay longer than the required time if you care to, or you may return at any time to take up new work I'm constantly adding to my school to make it the most modern at all times.

### Earn While You Learn

My employment department will assist you to a part time job where you can make a good part of your living expenses while training, and they will assist you to get a BIG PAY job on graduation.



H. C. LEWIS, President

### Get My Free Book

This big, handsome new book just off the press—size 12x15 in.—shows actual photographs of my big shops. Cost me a dollar to print, but it's yours FREE if you mail coupon. You owe it to yourself to get the facts.

H. C. LEWIS  
President

COYNE

Electrical School

1300-10W. Harrison St.

Dept. 136-2,

Chicago, Illinois

Dear Sir: Please send me absolutely FREE your big new book and full particulars of your special offer and two courses FREE.

**GET MY BIG FREE BOOK NOW!**

Name .....


Address .....

Town .....

State .....

## MAIL THIS COUPON NOW!




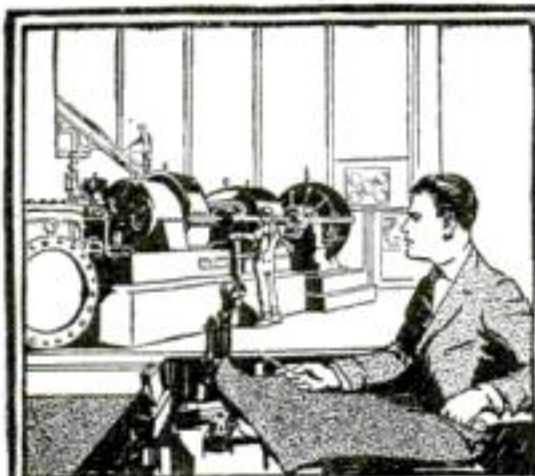

Be Superintendent of an  
Electrical POWER PLANT



Own Your Own Electrical  
REPAIR SHOP

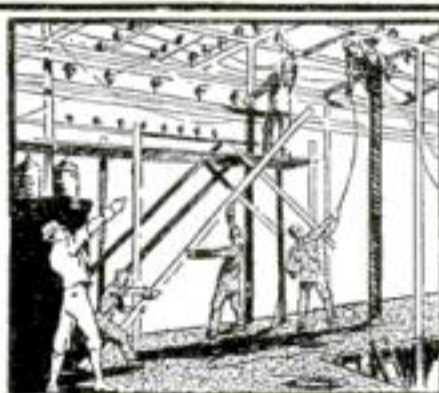

Boss Electrical  
Construction Jobs



Be an Electrical CONTRACTOR



Chief Engineer  
DUNLAP

**I Guarantee You  
A Job  
AND  
A 50% Raise!**

**Be a  
Dunlap  
trained  
Electrical  
EXPERT!**

**I**f you are now earning less than \$40 a week, I will guarantee you an Electrical job after you finish my training—guarantee you at least 50% more pay UNDER BOND, or refund every cent you pay for this training. You can get this guarantee ONLY from AMERICAN SCHOOL, the 27 year old, million-dollar Educational Institution.

**Electricity pays Experts \$70 to \$200 a week**

The world's greatest, fastest growing, most fascinating business needs you. New projects total a thousand million dollars. No other industry offers such a golden future to trained men, trained as I train you. Take my training AT HOME, in your spare time. Prepare to BOSS untrained electrical workers, to direct Electrical Construction, to go into business for yourself. Loan me only a part of your spare time and I'll help you climb from small pay and hard work to a salary of \$5,000 a year or more! Here is the chance you've been waiting for to get into easier work and enjoy the better things of life.

## 22 Great Electrical Engineers

helped me make this training the most complete and up-to-date on earth. Dunlap-training brings you instruction from a recognized authority in every branch of electricity. These men know what training you need to earn the largest salaries, and they give it to you. My training built by 22 Engineers and Executives of the following great corporations and Universities:

1. General Electric Co.
  2. Commonwealth Edison Co.
  3. Crocker-Wheeler Co.
  4. Outler-Hammer Mfg. Co.
  5. American Telephone & Telegraph Co.
  6. Westinghouse Electric & Mfg. Co.
  7. Western Electric Co.
  8. Underwriters Laboratories, Inc.
  9. Columbia University
  10. Dartmouth College
  11. Massachusetts Institute of Technology
  12. Lehigh University
  13. University of Vermont
  14. Armour Inst. of Technology
  15. University of Kansas
- AND MANY OTHERS.

**Chief Engineer Dunlap  
American School**

Electrical Division  
Drexel Ave. and 58th St.  
Dept. E-275 CHICAGO

**MAIL  
TO-DAY**

## Write me AT ONCE!

AMERICAN SCHOOL is organized to give you the benefit of royalties, profits and other savings. Get the facts about YOUR OPPORTUNITIES in ELECTRICITY! Take advantage of my GUARANTEED JOB and RAISE offer. If you're less than 40 years old, even if you have only common schooling, I guarantee your success. Get my big, free catalog—see for yourself how quickly and easily you can get ready for

**Big  
Pay!**

**MAIL  
COUPON  
QUICK!**

Chief Engineer Dunlap  
AMERICAN SCHOOL  
Electrical Division  
Dept. E-275, Drexel Ave. & 58th St.  
CHICAGO, ILLINOIS

Please rush free book, guarantee of a job and 50% raise and complete information.

Name.....

St. No.....

City..... State.....

**DUNLAP GUARANTEES JOB AND RAISE**



**Only a  
Part  
of  
Outfit**

### Earn Money While Learning!

Don't let lack of ready money or anything else prevent you from getting my training. As early as your eleventh lesson I train you to do Electrical and Radio Jobs in your spare time—to earn enough money to pay for this course and have plenty left over. I show you how to go out and get this work, what to charge, etc. This gives you experience, practice and CASH.

**Dunlap Guarantees You a Job And a Raise!**



# CARPENTRY

## SELF TAUGHT!!

**Be A SKILLED Workman and Hold Your Job in Dull Seasons**



Do you know that even when work seems hardest to get, building contractors are complaining that they can't get enough skilled carpenters? Almost any man that says he is a carpenter can get a job in the building season, but it depends on what a man *KNOWS* whether he gets laid off at the first dull week or not. Spare time reading and study of AUDEL'S GUIDES will help make you the kind of skilled workman that is never out of a job.

### New Ideas - Modern Methods - Short Cuts

This course "Audel's Guides for Carpenters and Builders" consists of 4 handy volumes of over 1500 pages with thoroughly illustrated charts, diagrams, graphs, pictures with calculations for every job from making the excavation to constructing the entire building. You will find these new Guides most complete and comprehensive in addition to being both timely and practical. There are 3700 actual examples of efficient construction work with new methods, ideas, solutions, plans, systems,

short cuts, time and labor saving suggestions, new ways that cover the entire theory and practice of the subject illustrated by sketches and forms all specific and practical. Audel's Guides give you the short cut, professional information you want. No need to guess or take chances. Every day you have before you in this set the exact, practical, useful information that will help you with every job that comes up in your daily work.

### Thousands Say Guides Are Carpenter's Best Friend

#### "Reasonable Price"

I find the Guides very satisfactory. The knowledge in them is much greater than I anticipated. A very convenient size and price is so reasonable that every carpenter should possess a set.—Ralph M. Collier, Lowell, Mass.

#### "Valuable for Beginners or Old Timers"

I have looked over my Audel Guides and find a wealth of information. Their size makes them very handy to carry right onto the job. I have put my books in my tool kit and have them

for ready reference. The arrangement of subjects and the simple way it is explained make the books very valuable for the beginner. The rules and formulas are mighty handy for the old timers.—Ross Smith, Sommers Point, N. J.

#### "Good For Professional Carpenters"

It is the most handy reference work that I ever came in contact with. It is the very thing that the building mechanic needs every day for reference. I wish to state further there is not a

foreman or superintendent who can afford to be without this valuable work. I wish you unbounded success.—George H. Watson, 136 Munson St., Long Island City, N. Y.

#### "Guides Save Hard Knocks"

The Guides are truly wonderful and should be in the hands of all young carpenters as well as a lot of the older heads. If I had such information 20 years ago they would have saved me many a hard knock and also sleepless nights trying to

figure out the next day's work.—G. M. McJohnston, R.R. 1, Hammond, Ind.

#### "Save Money"

The Guides have met with my complete satisfaction. Anyone expecting to build a home can well save \$150 or more by using the information given in your books.—W. E. Frantz, Box 77, Tuscarawas, Ohio.

#### "Good For Amateurs"

The books are surely worth more than the purchase price; especially as they serve as a

guide to the non-professional like myself who is trying to build himself a home at the least expense.—Otto F. Schulte, P. O. Box 143, Westmont, Ill.



### Condensed Contents of Audel's New Guides

Guide No. 1—Over 341 pages—1200 illustrations

- How to know the different kinds of wood.
- How to use the different kinds of wood.
- Complete detailed information on nails and screws.
- How circular and band saws are handled.
- How to use the steel square.
- How to sharpen tools.
- How to file and set saws.
- How to make wood joints.
- Complete information regarding joints and joinery.
- How to build furniture.
- How to make a work bench.
- How to make a mitre box.
- How to make a mitre shooting board.
- How to plumb and level work.
- How to use the chalk line.
- How to lay out work.
- How to use rules and scales.
- How to use all of the carpenter's tools, with over 900 illustrations showing specifically how.

Guide No. 2—Over 455 pages—400 illustrations

- How to understand carpenter's arithmetic.
- How to understand geometry.
- How to understand trigonometry.
- How to solve mensuration problems.
- How to estimate the strength of timbers.
- How to proportion beams.
- How to use drawing instruments.
- How to read plans.
- How to survey.
- How to draw up specifications.
- How to estimate cost.
- How to build houses, barns, garages, bungalows, etc.

Guide No. 3—Over 255 pages—400 illustrations

- How to excavate foundations.
- How to build foundations.
- How to make water-proof.
- How to erect post foundations.
- How to build forms for concrete.
- How to proportion foundation footings.
- How to frame houses.
- How to set girders and sills.
- How to frame joists.
- How to construct a well hole.
- How to frame a studding.
- How to frame corner posts.
- How to lay out and cut braces.
- How to attach lath to corner posts.
- How to frame temporary and permanent braces.
- How to frame girts and rib bands.
- How to set window frames.
- How to frame partitions.
- How to distinguish various types of roofs.
- How to use the settings 12, 13 and 17 on the steel square.
- How to lay out mitre cuts.
- How to use tangents, and full detailed information covering sky lights, scaffold and hoisting.

Guide No. 4—Over 448 pages—400 illustrations


- How to put on wood, fibre and metal shingles.
- How to lay gravel roofs.
- How to lay tin roofs.
- How to hang doors.
- How to frame windows.
- How to put on siding.
- How to put on exterior trim.
- How to do cornice work.
- How to build stairs.
- How to lath.
- How to lay floors.
- How to put on interior trim.
- How to paint.
- How to give first aid to the injured.

**\$1 PER MONTH-ENTIRE SET \$6**  
**FREE EXAMINATION**  
**POCKET SIZE-FLEXIBLE COVERS**  
**1600 PAGES-3700 ILLUSTRATIONS**

# FREE EXAMINATION

Not a cent to pay until you see the books. No obligation to pay until you are satisfied. Send coupon now—today and get this fine, helpful new set for Carpenters and Builders. After you have looked them over 5 days send only \$1, then \$1 a month until \$6 is paid—if you want to keep them.

**SEND NO MONEY—NOTHING TO POSTMAN—MAIL COUPON NOW!**  
**FREE EXAMINATION COUPON**  
 THEO. AUDEL & CO., 72 Fifth Avenue, New York City.  
 Please submit me for approval and free examination  
 Ship at once, prepaid, the 4 numbers. If satisfactory I  
 agree to send you \$1 monthly until \$6 is paid.  
 Name.....  
 Address.....  
 Occupation.....  
 Employed by.....

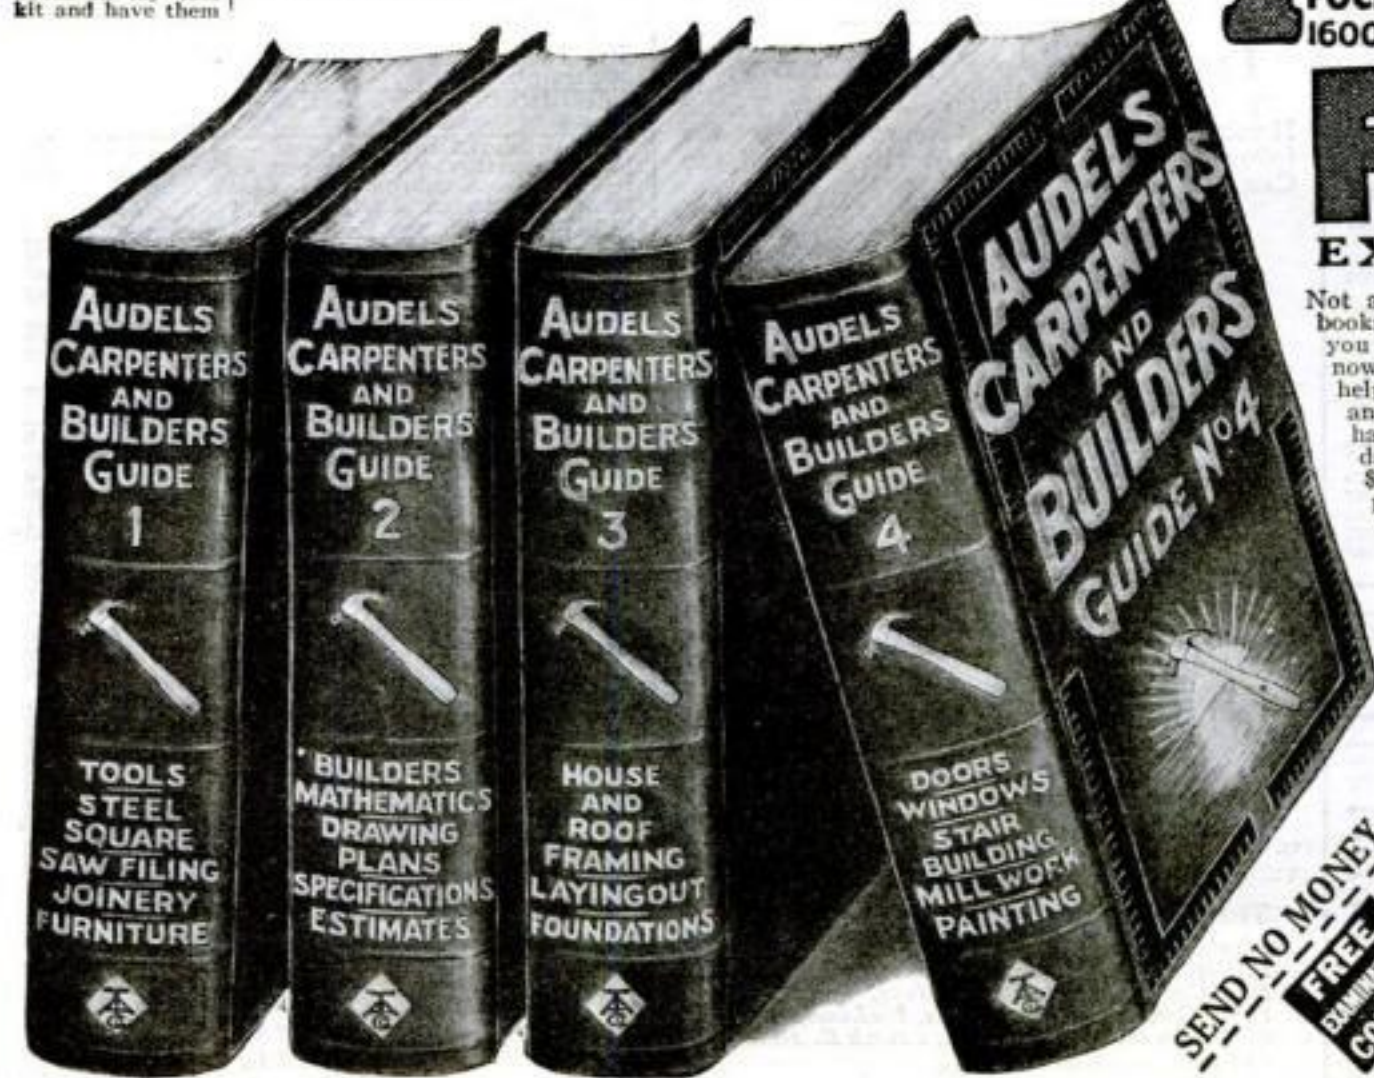



# Money Making Opportunities for "Popular Science" Readers



## AUTOMOBILES AND ACCESSORIES

**AUTOMOBILE PARTS**—Used parts for most any car at half factory list prices. Allen, Briscoe, Buick, Cadillac, Chalmers, Chevrolet, Dodge, Ford, Grant, Hudson, Hupmobile, Oakland, Overland, Oldsmobile, Reo, Studebaker, and many others. Send list of parts wanted. Century Auto Parts Co., 4105 Olive Street, St. Louis, Missouri.

**MONEY!**—Silvering autolights, radiators, mirrors. Refinishing tableware, stoves, brass beds, etc. Outfits, Methods free. Write—Sprinkle-Plater, Dept. 96, Marion, Indiana.

**MOTOR OWNERS**—My Kleenall solvent banishes carbon trouble forever. Oil base. Harmless to motors. Results guaranteed. Formula, \$1.00. Albion Bayers, Box 52, Rutland, Mass.

**AUTOISTS**. Know whether your Headlights are lighted. Our "IS-IT-LIT" Telltales for \$1.25 are positive indicators. If out of gas on the road our Gas Siphon Pump will enable you to borrow from the first passing car and get home; price \$2.50. Handy Specialty Co., Somerville, Mass.

## FORD ACCESSORIES

**BUILD a Ford Racer**. Book with complete plans of World's record holder. Postpaid, \$2. P. W. Cornelius, 2457 E. Washington St., Dept. P-2, Indianapolis, Ind.

**CALIFORNIA Tops** for Ford Roadster and Touring. Stylish—Noiseless. Cool in Summer. Warm in Winter. Easily installed. High quality. Low prices. Write factory today. Koupet Auto Top Company, Belleville, Ill.

**FREE** neutral zero weather. Stiffest Ford turns easily. Quickly installed. \$3.50. Salesmen \$2.50. Neutros, Brighton, N. Y.

## MOTORCYCLES, BICYCLES, SUPPLIES

**OVERSTOCKED**—200 Used Motorcycles. Must be sold at once. We have Harley-Davidsons, Indians, Hendersons, Excelsiors, Clements. Prices \$25.00 up. Write for our Bargain List. Myerow Brothers, Dept. C, 15 Berkeley St., Boston, Mass.

**DON'T** buy a bicycle motor attachment until you get our catalogue and prices. Shaw Mfg. Co., Dept. 4, Galesburg, Kansas.

## MODELS AND MODEL SUPPLIES

**WRITE** for a copy of our "Quick-Action Advertising Rate Folder"—It contains information of real value to you. Popular Science Monthly, 250 Fourth Avenue, N. Y.

**WE** make working models for inventors and experimental work, and carry a complete stock of brass gears and model supplies. Send for catalogue. The Pierce Model Works, Tinley Park, Illinois.

**HULIT & Co.**, 625 Jackson, Chicago, Ill. Experimental Machinists. Model Makers. Dies. Patterns. Complete general Machine shop. Ex-Lamson.

## MOTORS, ENGINES AND MACHINERY

**MOTORS**—Manufacturer's Surplus Sale. 1/2 HP. \$8.50; 1 HP. \$32.50; 1 HP. \$54.50. 8 Volt Charging Generators, \$8.50. Complete Lighting Plants—Generators—Light Machinery. Write for Catalog. Motor Specialties Co., Crafton, Penna.

**MOTORS**, \$2.98, twentieth horsepower, 115-volt, alternating direct current. Order Now. Pay Postman. Perry Trading Company, Dept. 8, 815 Lake, Racine, Wis.

## MANUFACTURING

**DIES**, Tools and General Manufacturing. Models and manufacturing of new inventions our specialty. Logan Machine Co., 126 S. Clinton St., Chicago, Ill.

**DEVELOPING** ideas and manufacturing our specialty. Absolute satisfaction. 33 years' experience; write us. The K. & B. Die & Specialty Co., 2018 Elm St., Cincinnati, Ohio, Dept. C.

**PATTERNS**, wood and metal. Models, tools and dies. Brass, bronze, aluminum and iron castings. Screw machine work, production work of all kinds. Write Modern Machine & Pattern Co., Terre Haute, Ind.

## MACHINE TOOLS

**1 1/2" x 6"** Leblond Lathe quick change, \$210.00. **12" x 6"** Reed engine lathe, \$145.00. Number 60 Heald cylinder grinder \$700.00, **1 1/4"** Shaper, \$185.00 complete line machinery. Cincinnati Machinery Supply Co., 217 E. Pearl St., Cincinnati, Ohio.

**MR. ADVERTISER**: Ask today for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Manager, Classified Advertising, Popular Science Monthly, 250 Fourth Avenue, New York.

## AVIATION

**THE American School of Aviation** announces a new correspondence course in mechanics of aviation. A thorough training in practical aeronautics. American School of Aviation, Dept. 6741, 3601 Michigan, Ave., Chicago, Illinois.

## PENMANSHIP

**YOUR** signature (12 styles), finest you have ever seen. Send quarter, Meub, Expert Penman, 2051 Lake, Pasadena, Calif.

## GUMMED LABELS

**GUMMED Labels**—Name and address, 503, 2 lines, 30c; 3 lines, 50c. Catalogue. Eastern Label Co., K, Clintonville, Conn.

## AMERICAN MADE TOYS AND NOVELTIES

**OPPORTUNITY** to start Manufacturing Metal Toys and Novelties. No experience necessary. Enormous demand exceeds supply. We furnish, at cost, casting forms for production and buy entire output, also place yearly contract orders. Casting forms made to order. Catalog, advice and information free. Metal Cast Products Co., 1696 Boston Road, New York.

## Another \$25.00 IN PRIZES

To win one of these cash prizes is easy, and every reader is invited to enter this fascinating competition. Just write a letter of not over seventy words answering this question:—

**What Advertisement of "Money Making Opportunities" in this issue interests you most and why?**

Here are the prizes we will pay for the ten best letters answering the above question:—

First Prize . . . . . \$10.00  
Second Prize . . . . . 5.00  
Third Prize . . . . . 3.00  
And 7 Prizes  
of \$1.00 each . . . . . 7.00

First read every one of the "Money Making Opportunities" advertisements on pages 10 to 28. Check the ones that interest you. Then read over the ones you have checked and decide on the one that interests you most.

Then write a short letter, not more than seventy words, telling us why the advertisement you pick interests you most. Remember that ten prizes will be awarded. You have a good chance of winning one of them. Be sure to mail us your answer before Feb. 1st. The prizes will be awarded, in the order of their merit, for the letters that are most interesting and best expressed.

The names of all the prize winners and the letters that win the first two prizes will be printed in this column in the April issue. Address your prize letter to

Contest Editor

POPULAR SCIENCE MONTHLY  
250 Fourth Ave., New York City

## Last Month's Prize Winners

The first prize of \$10.00 goes to Mr. Joseph Hunker, West Point, Nebraska, for the following letter on the advertisement of the Clock Company.

Dear Editor:

I am interested in the advertisements, "For the Home" and "Trade Schools" because last January I built a Grandfather Clock and sold it for \$75.00. With the profit made, I took a Trade School Course which boosted my weekly earnings from \$25.00 to \$45.00 per week. Therefore, I owe the support of my wife and three children to these two advertisements.

JOSEPH HUNKER.

The winner of the second prize is Mr. Walker Van Riper. Mr. Van Riper's letter was about the Union Loom Works advertisement. His letter follows:

Dear Sir:

For the "shut-in" a real Money Making Opportunity is hard to find. Yet happiness, sometimes subsistence even, depend on finding it.

The pointed advertisement of the Union Loom Works carries a real message of cheer to those who, like myself, must have suitable home work. And Popular Science is the one best medium for broadcasting this message. Its wide circulation and reputation for reliability make it best.

WALKER VAN RIPER.

The third prize goes to Mr. C. M. Reynolds of Spruce Creek, Pa., for his letter on the advertisement of the Clock Company.

The winners of the other seven prizes are:

Master G. Davis, Harrisonburg, Va., Mrs. E. Reppert, Columbus, Ohio, Billy Fessler, New Castle, Pa., Arthur Moss, Tranquille, B. C. Canada, O. M. Rogers, McLean, Texas, R. D. Large, Reading, Pa.; Frank E. Rising, Los Angeles, Cal.

Rate 30 Cents a Word. A 10% discount is allowed on all contracts for six consecutive insertions. Advertisements intended for the April issue should be received by February 5th

## RADIO AND SUPPLIES

**YOUR** Crystal Set will work 400 to 1000 miles if made by my plans. No tubes or batteries. Copyrighted plans \$1.00; or furnished FREE with complete parts for building set, including special coil and panel correctly drilled for only \$5.00. Satisfaction guaranteed or money refunded. Satisfied customers everywhere. Particulars free. Leon Lambert, 555 Kaufman Bldg., Wichita, Kansas.

**BIJUR** Generators new 6 volts maximum output 23 amp. 2000 r. p. m. with cutout suitable charging A battery. Government surplus. \$10.00. Cook County Sales, 2456 Calumet, Chicago.

**CASH** in on Radio! Build and sell sets for us. No trouble to earn \$5 an hour in spare time at home. Auburn Radio Co., Dept. G, Cincinnati, O.

**RADIO** Generators: 500v 100 watt, \$28.50. Battery Charging Generators, \$5.50. High Speed Motors, Motor Generator Sets all sizes. Motor Specialties Co., Crafton, Penna.

**2,650 MILES** Distance with one tube. Any Novice understands our Simplified Instructions, including Panel Layout and Photo, 25c. Vesco Radio Co., Box P8 117, Oakland, Calif.

## EDUCATIONAL AND INSTRUCTION

**DRAFTING**, Tool Designing and Mathematics taught by mail: combined course or separate subjects. Harding School, Box H, Highland Park, Michigan.

**DOUBLE** entry bookkeeping mastered in 60 hours; guaranteed; diploma. International Bookkeeping Institute, Springfield, Missouri, Desk 10.

**USED** correspondence school courses save over half. Bargain catalogue 1000 courses free. Used courses bought. Students' Exchange, Dept. A, 47 West 42d Street, New York.

**CORRESPONDENCE** Courses sold complete; 1-3 usual prices because slightly used; easy terms; money back guarantee. All schools and subjects. Write for special Free catalog. Courses bought for cash. Economy Educator Service, N-202, West 49th St., New York.

**HIGH** School, Normal, Business, Law and Collegiate courses thoroughly taught by mail. Typewriting course free. Apply Carnegie College, Rogers, Ohio.

**MR. ADVERTISER**: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Address your inquiry to: Manager, Classified Advertising, Popular Science Monthly, 250 Fourth Avenue, New York.

**RAILROAD** Postal Clerks start \$133 month, railroad pass. Send stamps for questions. Columbus Institute, N-2, Columbus, Ohio.

**DINING** and sleeping car conductors (white). Experience unnecessary. We train you. Send for book of Rules and application. Superintendent Railway Exchange, Sta. C., Los Angeles.

**SHORTHAND**—Easy complete course. Most rapid readable system. First lesson papers and pamphlets for 10c postage. Memoscript Institute, Roanoke, Virginia.

**STUDY** Patent Solicitation. Become Patent Attorney. Full particulars. Patent Law, Jordan, Minn.

**USED** correspondence courses and books bought, sold and rented. List free. O. W. Yates, Salem, Va.

**BOOKKEEPING** in a week, \$2 complete. Dukes, 640 West 153d Street, New York.

**CORRESPONDENCE** Courses—all schools sold complete at lowest prices. Easy terms, money-back guarantee. Courses bought for cash. Catalog Free. Mention Subject. Economy Educator Service, 442-B, Sansome, San Francisco.

**ARTHOL** Shorthand learned in four evenings. Full course seven dollars. Used everywhere. Sent on approval. Particulars, Hollefreund's School, Stratford, Ontario, Canada.

**WANTED**—Representatives in every factory in the United States. Popular Science Monthly, 250 Fourth Ave., New York.

## FOR THE HOME

**HOME** Weaving—Looms only \$9.90. Big money in weaving Colonial rugs, carpets, etc., from rags and waste material. Weavers are rushed with orders. Send for Free Loom Book, it tells all about home weaving and quotes reduced prices and easy terms on our wonderful new looms. Union Loom Works, 482 Factory St., Boonville, N. Y.

**A WARMER** home at less cost. To get quick, steady heat and plenty of it on less coal, attach the CROWN Fuel Saver to feed door of your heating plant. Users guaranteed 20% fuel saving—or money refunded. Write for details of this amazing heat producer, coal saver and smoke consumer. CFSCo., 12 N. 10th St., Richmond, Ind.

**GRANDFATHER** clock works \$5.00. Build your own case, instructions free; make good profits selling your friends. Clock works with chimes for old or new cases. Write for full particulars. Clock Co., Nicetown, Penn.

**PURCHASE** a beautiful Electric Fountain for your home at Jobbers' price. Walter L. Haanel & Co., 4521 Ravenswood Ave., Chicago.

**MR. ADVERTISER**: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Address your inquiry to: Manager, Classified Advertising, Popular Science Monthly, 250 Fourth Avenue, New York.

**More Money Making Opportunities  
on pages 12 to 28**



# What Is Magnetic Attraction?

**T**HEY are strangers, almost. He was introduced to her at a dance a few weeks ago. She invited him to her home. He came.

And now, as they sit near each other, as they talk idly of the things that interest them both—they are conscious of a strange, irresistible urge. They move closer to each other. Their hands touch, and an electric thrill runs through their bodies. They look at each other with eyes that are big with wonder and joy. They are . . . in love!

What is that powerful magnetic influence that draws one man to one woman—forever, irresistibly? What is that strange, never-failing spark that awakens love? What is it, in man or woman, that seems to draw and fascinate—a hypnotic power that no one can resist?

You have it. Everyone has it. But only one person in a thousand really uses this amazing power to get what he or she wants out of life.

## How You Can Learn the Secret of Magnetic Control

You have the magnetic attraction you need, but you are not using it! You can be popular in social life. You can be successful in business. You can get whatever you want out of life, you can be precisely the man or woman you want to be—if you will only be fair to yourself and give your natural magnetism a chance to show you its powers.

How, you ask? Let Edmund Shaftesbury, famous scientist and psychologist, awaken the spark of your magnetic conscience. For years, this extraordinary genius has been quietly teaching his amazing science of Magnetic Control to a comparatively small group of people scattered over the world—necessarily charging from \$200.00 to \$500.00 for his personal instruction. Now at last he has consented to make his powerful principles available to everyone—he has agreed to reveal his great secret to the public at a trifling cost that places

it within reach of all.

Through the Shaftesbury system for the Cultivation of Personal Magnetism, you can become a new, dominant, powerful, magnetic personality. You can release all the magnetic influence of your nature—your mental magnetism, your sex magnetism, your emotional magnetism, your passionate magnetism, your aggressive magnetism. You can sway and control others. You can command success. You can influence people to do the things you want them to do.

## Use Your Personal Magnetism in Business and in Social Life

"No man or woman can succeed in the world without the subtle power of personal magnetism," says the great Shaftesbury. Why don't you use the magnetism of your personality to attract people to you, to win success in your business or profession, to become the man or woman you want to be?

The amazing science of Magnetic Control as taught by Edmund Shaftesbury will give you a wonderful new poise, a great new confidence in yourself, will make you buoyant, energetic, powerful. This simple system

which you can follow at ease in the privacy of your home will awaken your creative energies and set free your great thought-force—will make a new person of you almost overnight.

Think what this will mean to you in business, in social life, in the intimate relationships with other people! You will be the master. You will control. You will succeed.

Refuse to drift any longer. Release the great magnetic forces of your personality and astound everyone with your quick climb to power, wealth, influence.

## The Facts Are Free—May We Send Them?

You will enjoy our interesting free book called "Your Magnetic Powers." It explains the whole remarkable Shaftesbury system and what it will mean to you right from the start. Why, you cannot possibly study the first elementary principles of this amazing system without feeling conscious of a new power surging through you, a new confidence in yourself, a new poise and self-assurance!

Send for the free book today. There's no obligation. A pleasure and surprise await you.

Ralston University Press, Dept. 14-B, Meriden, Conn.

**RALSTON UNIVERSITY PRESS,**  
Dept. 14-B. Meriden, Conn.

I'd like to know more about the famous Shaftesbury system that develops mental and personal magnetism. Send me your interesting free book called "Your Magnetic Powers" and remember that there is not the slightest obligation to me.

Name.....

Address.....

City..... State.....

**Send Today for FREE Book**





## An Easy Way to Learn PHARMACY AT HOME

Graduate pharmacists are always in demand. The work is interesting and pleasant and salaries are good. Many young men open drug stores of their own and become independent.

There's an easy way to learn pharmacy right in your own home in spare time, without losing a day or a dollar from your present work.

The International Correspondence Schools course in Pharmacy supplies the knowledge which it will be necessary for you to have in order that you may pass your State Board Examination.

Just mark and mail the coupon printed below to the International Correspondence Schools, Box 7637-D, Scranton, Pa., and full particulars about the Pharmacy Course or any other work of your choice will be sent to you by return mail.

### INTERNATIONAL CORRESPONDENCE SCHOOLS Box 7637-D, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

#### ☐ PHARMACY

##### BUSINESS TRAINING COURSES

- |  |   |
|--|---|
| <input type="checkbox"/> Business Management                     | <input type="checkbox"/> Salesmanship           |
| <input type="checkbox"/> Industrial Management                   | <input type="checkbox"/> Advertising            |
| <input type="checkbox"/> Personnel Organization                  | <input type="checkbox"/> Better Letters         |
| <input type="checkbox"/> Traffic Management                      | <input type="checkbox"/> Show Card Lettering    |
| <input type="checkbox"/> Business Law                            | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law                 | <input type="checkbox"/> Business English       |
| <input type="checkbox"/> Accountancy (Including C.P.A.)          | <input type="checkbox"/> Civil Service          |
| <input type="checkbox"/> Nicholson Cost Accounting               | <input type="checkbox"/> Railway Mail Clerk     |
| <input type="checkbox"/> Bookkeeping                             | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary                       | <input type="checkbox"/> High School Subjects   |
| <input type="checkbox"/> Spanish <input type="checkbox"/> French | <input type="checkbox"/> Illustrating           |

##### TECHNICAL AND INDUSTRIAL COURSES

- |   |  |
|---|--|
| <input type="checkbox"/> Electrical Engineering                           | <input type="checkbox"/> Architect               |
| <input type="checkbox"/> Electric Lighting                                | <input type="checkbox"/> Architects' Blue-prints |
| <input type="checkbox"/> Mechanical Engineer                              | <input type="checkbox"/> Contractor and Builder  |
| <input type="checkbox"/> Mechanical Draftsman                             | <input type="checkbox"/> Architectural Draftsman |
| <input type="checkbox"/> Machine Shop Practice                            | <input type="checkbox"/> Concrete Builder        |
| <input type="checkbox"/> Railroad Positions                               | <input type="checkbox"/> Structural Engineer     |
| <input type="checkbox"/> Gas Engine Operating                             | <input type="checkbox"/> Chemistry               |
| <input type="checkbox"/> Civil Engineer                                   | <input type="checkbox"/> Automobile Work         |
| <input type="checkbox"/> Surveying and Mapping                            | <input type="checkbox"/> Airplane Engines        |
| <input type="checkbox"/> Metallurgy <input type="checkbox"/> Mining       | <input type="checkbox"/> Agriculture and Poultry |
| <input type="checkbox"/> Steam Engineering <input type="checkbox"/> Radio | <input type="checkbox"/> Mathematics             |

Name.....  
Street.....  
Address.....

City..... State.....

Occupation.....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.

### Money Making Opportunities

#### PRINTING, ENGRAVING AND MULTIGRAPHING

EVERYTHING printed! Samples free. Franklin Press, B-34, Milford, New Hampshire.

"ARISTOCRAT"—embossed stationery. Exclusive. Reputation. Samples for stamps. Apex Company, 251 South Main, Wilkes-Barre, Pa.

BETTER Printing for Less Money. Write us about your printing needs, and you will save money. Ernest Fantus Company, 525 South Dearborn Street, Chicago.

EMBOSSING business, personal stationery. Samples, stamp. Daniels P. Company, Pittston, Pennsylvania.

225 BOND Letterheads, Envelopes, Billheads, Cards, \$1.25 each. Combination \$4.00. Economic Printery, Leonia, N. J.

#### OFFICE DEVICES

ADDRESSING machines, multigraphs, duplicators, folders, check writers, sealers, dictating machines, at about half new cost. Pruitt, 170-Z North Wells, Chicago.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Address your inquiry to: Manager, Classified Advertising, Popular Science Monthly, 250 Fourth Avenue, New York.

#### ADDING MACHINES

FREE trial, marvelous free adding machine. Adds, subtracts, multiplies, divides, automatically. Work equals \$350.00 machine. Price only \$15.00. Speedy, durable, handsome. Five-year guarantee. Used by largest corporations. Write today for catalog and free trial offer. Lightning Calculator Co., Dept. O, Grand Rapids, Michigan.

#### TYPEWRITERS AND SUPPLIES

TYPEWRITERS all makes. Save one-half. Thoroughly rebuilt in our factory by the famous "Young Process." Fully guaranteed. Free trial. We handle all standard makes. Cash or sold on easy terms. Write for Catalog. Young Typewriter Co., Dept. 5042, Chicago, Ill.

TYPEWRITER ribbons, all machines, 50 cents. Abbit Typewriter Co., 38 East 23rd, New York.

#### BRANCH OFFICE SERVICE

PITTSBURGH Office and Representation Free. Pittsburgh Office Service, 973 Union Trust Bldg.

#### ADVERTISING

ADVERTISE in 24 metropolitan dailies, 24 words, \$15.00. Helpful Guide listing 1000 publications, 4c. stamps. Wade Company, Baltimore Bldg., Chicago.

24 WORD ad 355 rural weeklies, \$14.20. Ad-Meyer, 4112P Hartford, St. Louis.

INCH Display 100 magazines thrice, \$8. Beck, 5411 Alaska, St. Louis.

CLASSIFIED 70 magazines, 3c. word, thrice, 8c. Smith's Service, Wenatchee, Wash.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Address your inquiry to: Manager, Classified Advertising, Popular Science Monthly, 250 Fourth Ave., New York.

#### MAIL ORDER BUSINESS

\$50 a week, evenings. I made it. Mail order business; booklet for stamp tells how. Sample and plan 25c. Free, 12 articles worth \$3. Alps Scott, Cohoes, New York.

"MONEY Making Business Chances"—Write Pruitt Publishers, 734-P, Cherry, Kansas City, Mo.

WANTED—Representatives in every factory in the United States. Popular Science Monthly, 250 Fourth Ave., New York.

#### LANGUAGES

WORLD-ROMIC System, Masterkey to all languages. Primers, \$1.94; Chinese, French, Spanish. Pronunciation-Tables, 30c. Dictionaries, \$1.98. Languages, 8 West 40th, New York.

#### STAMMEING

ST-TUT-T-TTERING and stammering cured at home. Instructive booklet free. Walter McDonnell, 59 Potomac Bank Building, Washington, D. C.

#### FISH

GOLD Fish imported Japanese varieties, aquatic plants. We make artistic aquariums. Illustrated circular free. Pioneer Aquarium Works, Racine, Wisconsin.

#### POULTRY

HENRY Acheson, Breeder Spencer Turkeys, Jersey Giants, Russian Orloffs, etc., Hatching Eggs, Breeding Fowls. Photo Booklet Free. R. I. Box 144-R-Santa Cruz, Calif.

#### INSECTS WANTED

WHY not spend Spring, Summer and Fall gathering butterflies, insects? I buy hundreds of kinds for collections. Some worth \$1 to \$7 each. Simple outdoor work with my instructions, pictures, price-list. Send 10 cents (not stamps) for my Illustrated Prospectus before sending butterflies. Mr. Sinclair, Dealer in Insects, Box 1424, Dept. 7, San Diego, California.

#### CHALK TALKS

LAUG: producing program, \$1.00. Circulars free. Cartoonist Balda, Oshkosh, Wisconsin.

#### MAGIC TRICKS

TRICKS, jokes, magical apparatus, sensational escapes. Illustrated catalog, 10c. Oaks Magical Co., Dept. 550, Oshkosh, Wis.

#### HOW TO ENTERTAIN

PLAYS, musical comedies and revues, minstrel music, blackface skits, vaudeville acts, monologs, dialogues, recitations, entertainments, musical readings, stage handbooks, make-up goods. Big catalog free. T. S. Denison & Co., 623 So. Wabash, Dept. 26, Chicago.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Address your inquiry to: Manager, Classified Advertising, Popular Science Monthly, 250 Fourth Ave., New York.

More Money Making Opportunities  
on pages 10 to 28

## BE A DRAFTING EXPERT



Earn  
\$200 to  
\$400  
a month

New Superior  
Type of Training  
Great  
Association of  
Drafting Engineers  
Brings Famous "Job Method"

### RIGHT TO YOUR HOME!

If you're earning a cent less than \$60 a week, clip coupon now! Send for FREE BOOK. Be a DRAFTING EXPERT. Positions everywhere. Easiest, most fascinating work in the world. Short hours. Big Pay. Unlimited Opportunities. Drafting Experts are in contact with BIG MEN—in line for promotion—BIG PAY. Amazing Careers built on Drafting. President greatest Railway System in America and President Million Dollar Corporation, started as Drafting Experts.

### Practical Training from Practical Engineers

Get that Free Book. Find out about this Thorough, Easy, Simplified, Money-making Training. Common schooling all you need. We guarantee to train you successfully—AT HOME, with actual Drafting Jobs. Also Professional Instruments FREE! Personal and Individual lifetime Consultation Service from Accredited Engineers FREE to you. Famous "Job-Method" not narrow, one-man viewpoint. FREE EMPLOYMENT SERVICE. Powerful Association backs you up. Drafting Expert's Outfit FREE. Many other big features special for limited time. ACT NOW.

### Get this Book FREE!

Start to make money quick, like P. Novak, of Freehold, Pa. He says, "I was a laborer at \$4.50 for ten hours. Now I'm \$10 for 8 hours. Easy Work. You did it for me."



### Big Outfit FREE

To help you get started for life, limited time only. Some instruments Engineers use. Valued at \$16. Absolutely Free. Write quick. Clip Coupon Now for Special Offer.

We have taken over the famous old Cornell School of Drafting.

Address, Chief of Staff,  
ASSOCIATED  
DRAFTING  
ENGINEERS

1920 Sunnyside Ave., Dept. 237, Chicago, Ill.

## MAIL THIS COUPON

### FREE DRAFTING BOOK

Chief of Staff  
Associated Drafting Engineers  
Dept. 237, 1920 Sunnyside Ave.,  
Chicago, Ill.

Without obligating me in any way, please send me your book, "Drafting, the Foundation of Industry" absolutely free. Also complete information of your home-study Drafting course, FREE instruments and Special Offer.

Name.....

Address.....


Town..... State.....



# Be a B.W. Cooke-Trained AUTO EXPERT

**B. W. COOKE**Directing  
Engineer**CHICAGO  
AUTO SHOPS**"Pay Raiser  
of Men"I Guarantee to  
Train You  
At HOME

**EARN**  
**\$3500 to \$10000**  
**A YEAR**

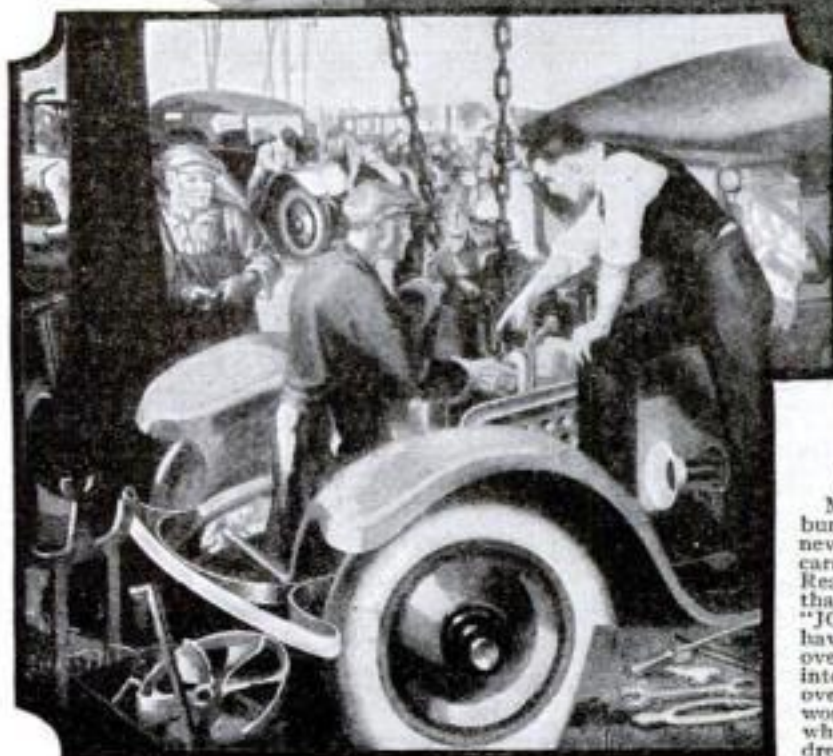

## Start to Make Money Quick Like Morrison

M. J. Morrison, Parkersburg, W. Va. (photo at right), never had a day's experience on cars before starting my training. Read what he says when less than half-way through his "JOB-WAY" course, "What I have already learned is worth over \$500 to me. I have gone into business and I'm making over \$50 a week clear, with wonderful prospects." And what Mr. Morrison and hundreds of others have done I will help you to do!



M. J. Morrison  
Parkersburg, W. Va.

Clip this Coupon  
Now-for my Big  
**FREE AUTO BOOK**

**FREE!**  
Big  
**2**  
Repair  
Outfits

## The World's biggest, most fascinating business needs you!

You needn't slave away at small wages another minute—mail coupon and I'll tell you how I train you **at home** in your spare time for positions paying \$75 to \$200 a week. Unlimited opportunities waiting for Cooke-trained Auto Experts. Let me show you how my "JOB-WAY" training has prepared hundreds of men *just like yourself* for a quick, brilliant success in the Auto business.

### Earn \$75 to \$200 a Week!

Don't sell your time for a penny less! *You don't need to* when you have my wonderful training. As Directing Engineer of the great Chicago Auto Shops I know what training you need to succeed, AND I GIVE YOU THAT TRAINING. Right in your own home I make you MASTER of every branch of Auto, Truck and Tractor work. I train you with JOBS—not books. I bring the original "JOB-WAY" training TO YOUR HOME!

### Read My Guarantee!

Ten guarantees in my big free Auto Book. No. 1 is "I guarantee to refund every cent of your money if after receiving my training you are not absolutely satisfied." This and nine other wonderful guarantees make my "JOB-WAY" course the training for you! Be sure to get my book and read all 10 guarantees—the most amazing protection offered by any school on earth!

### Experience, Education Not Needed!

I don't care how little schooling you have, I will make you a successful Auto Expert or refund your money! Boys and men of all ages have become Garage owners and managers, Superintendents, Foremen, Auto Experts, BIG PAY executives, after completing Cooke "JOB-WAY" training. I prove to you under bond, that I will prepare you to take advantage of the many wonderful opportunities of the great auto business!

### Get My Big Book Quick!

I will send it to you without one penny of cost. Read all the facts, find out about the demand for Cooke-trained Auto Experts. Let me tell you how easily and quickly you, too, may become an Auto Expert. Special offer right now to ambitious men. Coupon brings complete information. Mail it today!

### No Other Training Like Mine!

My training includes ALL Electrical work—Ignition, Starting, Lighting—ALL Mechanical end, Welding, Brazing, Vulcanizing—also Business Course, Salesmanship, Advertising, Buying, How to keep Simple Books—also Free Monthly Magazine, also 2 Free Outfits. Nowhere else I know of, can get you ALL this training.

Ten Billion dollars spent each year to repair 18 Million Autos, Trucks, Tractors—it's the world's biggest business. Amazing money opportunities everywhere for trained men. My Free Employment Service helps you to big jobs, and I help you to get into business for yourself.

### Tools and Test Bench Equipment Free

I supply every Cooke JOB-WAY student with 2 big, complete costly outfits absolutely free! Many students use these outfits to make money shortly after starting my training. Mail coupon for this remarkable offer!

Address Me **B. W. Cooke** Directing  
Personally **CHICAGO AUTO SHOPS** Engineer

DEPT. 225

1916 SUNNYSIDE AVENUE,

CHICAGO

## MAIL THIS COUPON NOW!

### FREE AUTO BOOK

**B. W. COOKE**, Directing Engineer, Chicago Auto Shops

Dept. 225, 1916 Sunnyside Avenue, Chicago

Send me FREE your big Auto Book "The Pay-Raiser" and proof that I can become an Auto Expert at home in spare time. Also reserve 2 Free outfits without obligating me.

Name.....

Address.....

City.....State.....



# Will you give me 6 Months to Increase YOUR PAY?

Your name on the coupon means "Yes"



No, I am not a wizard. I don't claim to have a "corner" on success, but here's a fact.

For fourteen years I have been helping men just like you to make more money, not just a few men here and there, but thousands of men.

Think these facts over—in just a few months time I boosted one man's pay from \$2.00 a day to over \$300 a month—another now makes as high as \$27.00 a day—another man, after securing my help, went into business for himself and, while he now hires his drafting done, he makes over \$50,000 a year.

## \$275 Extra in Three Days

One man saw an ad like this—Sent in the coupon—Enrolled for the Columbia Course—and shortly after he received \$275 for one drawing that he made in his spare time in three days.

Do you make money like these men do? Does the money in your pay envelope get you the things you really want or just enough to make you wish you, too, could have the good things of life that other men have—money, independence, success, happiness?

### MAKE \$50 TO \$100 A WEEK

Columbia will train you to be an expert Draftsman in your spare time at home by mail. There's a lot of room for you if you act now. This doesn't mean that you will be just an ordinary Draftsman, but a finished, Professional Draftsman, able to hold your place among the highest paid Draftsmen in the land.

### PROMOTION IS QUICK

We'll qualify you for a high salaried position in the Drafting field and keep you in touch with openings for Draftsmen in the big machine shops, industrial plants and United States Government departments. Men who start as Draftsmen are often advanced to Chief Draftsmen, Chief Engineers, Production Managers, and so on. Many of my graduates are today holding such positions as a result of my help. These positions pay big money and lead on to executive positions of the highest type. Thousands of men have found Drafting to be the stepping stone to some of the biggest positions in American industry.

### GET THE RIGHT TRAINING

I started this school years ago. Today it is a solidly established nationally known institution, with graduates all over the world. I stand personally in back of the Columbia School of Drafting and back of every promise, every statement we make.

### COLUMBIA SCHOOL OF DRAFTING

Roy C. Claffin, President

Dept. G. 112, 14th and T. Sts., N.W., Washington, D.C.

### FREE BOOK COUPON

COLUMBIA SCHOOL OF DRAFTING  
Dept. G-112, 14th and T Sts., N.W.,  
Washington, D. C.

Please send me without charge your free illustrated book on Drafting, telling me how I can secure your help in securing a position as Draftsman. Also enter my name for free subscription to "The Compass."

Name.....  
Address.....  
City.....State.....

You get the right training when you enroll at Columbia. You spend no time on long winded theories. You start on actual drawing work the day you receive your first lesson. You get right down to brass tacks and there is no lost motion, no waste time or effort at any stage of the course. From the very beginning you can feel yourself making progress, the kind of progress that makes you confident of yourself and sure of your success.

### YOU NEED NO PREVIOUS TRAINING

This course of mine is easy to understand and easy to follow. It is designed for men who must have the best and who must get the right training quickly, so as to be able to make more money as soon as possible. Many of my students are qualified, even before they complete the course. Many a man has increased his pay so soon after enrolling that his course has actually cost him nothing.

### SUCCESS CALLS MEN OF ACTION ONLY

If you are a man of action—if you want success bad enough to reach out and grab it, clip the coupon now and show me that you are a man of action. Keep right on top of this opportunity to make real money. Don't go looking for a pair of scissors, tear the coupon off and mail it right away. Get started now.

### What I Give You

**Free Book.** Send in the coupon today. I will immediately send you our book "Drafting—Your Success" which tells about Drafting and its opportunities and contains proof that I can raise your pay.

**Free Subscription to Drafting Publication, "The Compass."** I will give you free a subscription to our helpful, inspiring publication, "The Compass."

**Practical Problems.** You will be carefully coached in practical Drafting work.

**I Help You Get A Job.** I will help you get a position as a practical Draftsman and will give you real, personal help, such as I have given to thousands of others.

**Personal Instruction and Supervision,** throughout the Course. You will receive the personal instruction and help of Roy C. Claffin, President of the Columbia School of Drafting and a practical Draftsman of many years' experience.

**Draftsman's Equipment.** I will furnish you with a full set of first class drawing equipment and Drafting instruments, as shown in the picture below, when you enroll. You keep both sets on completing the course.

**Consultation Privileges.** You are free to write me at any time for personal advice and suggestions regarding your progress.

**Diploma.** The diploma I will give you on completing the course attests to your proficiency as a Draftsman. It is an entering wedge to success.

**Advice Regarding Government Positions.** The following are a few of the many positions open in the Government Departments from time to time. The salaries are starting salaries, subject to increase:

Architectural Designer—\$4,000 a year.  
Chief Draftsman, Naval Aircraft Factory—\$15.04 a day.  
Aeronautical Draftsman, Field Service Navy Department—\$5.20 to \$12.00 a day.

We will advise you as to other government openings from time to time.



### FREE DRAFTING OUTFIT

We give you free with our course this professional Drafting outfit. It is yours to keep when you complete the course.

## \$25.00 in PRIZES

See top of page 10 in front of book for details

## WANTED RAILWAY POSTAL CLERKS

\$1600 to \$2300 Year

MEN—BOYS, 18 UP

TRAVEL—See your country

Steady work. No layoffs. Paid Vacations

Common Education Sufficient

MAIL COUPON IMMEDIATELY



FRANKLIN INSTITUTE,  
Dept. T-275, Rochester, N. Y.

Sirs: Send me without charge, (1) Specimen Railway Postal Clerk Examination questions and free sample coaching lessons; (2) Schedule showing places of coming U. S. Government examinations; (3) List of Government jobs now obtainable.

Name.....  
Address.....

## Money Making Opportunities

### BOOKS AND PERIODICALS

"NATURE'S FINER FORCES"; Vibrations; Lights; Color-tones; Electromagnets; Odicuras; Radio; Cold-lights; Inventions; Wonderful Opportunities; Fifty Lessons; Marvelous Cures; Illustrated; 270 pages, \$2.00. Deluxe \$3.00. Stevens Science Publishers, 242 Powell, San Francisco.

ART Publications. Special descriptive circulars free. Also price list French illustrated magazines. P. S. Dunbar, Rowena Street, Boston, Massachusetts.

LAFFALOG is a monthly devoted to Wit and Wisdom, Essays, Poems and Formulas. Sample copy 10c. P. S. Lutz Printing Co., York, Penna.

### SONGWRITERS, AUTHORS AND MANUSCRIPTS

PHOTOPLAY—Story Ideas wanted. \$25-\$500 paid. Experience unnecessary; outline Free to anyone. Write Producers League, 312 St. Louis.

WRITERS—Stories, poems, plays, etc., are wanted for publication. Literary Bureau, 117, Hannibal, Missouri.

I WANT song poems. Casper Nathan, J-1252 Bryn Mawr, Chicago.

\$\$\$ FOR Ideas. Photoplay plots accepted any form, revised, criticized, copyrighted, marketed. Advice free. Universal Scenario Corporation, 214 Security Bldg., Santa Monica and Western Avenue, Hollywood, California.

### MUSIC AND MUSICAL INSTRUMENTS

MULTI-TONE, the new wonder dollar instrument everybody can play, imitate wind or string instruments, develop your talent or organize band among friends. Send for particulars. Multi-Sales Co., 448 W. 38th St., New York.

CORNETISTS — Saxophonists — Trombonists — Clarinetists. Get Free Pointers. Mention instrument. Virtuoso Music School, Concord 36, Mass.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Address your inquiry to: Manager, Classified Advertising, Popular Science Monthly, 250 Fourth Ave., New York.

### PHOTOGRAPHY AND SUPPLIES

HAVE you a camera? Write for free sample of our big magazine, showing how to make better pictures and earn money. American Photography, 117 Camera House, Boston, 17, Massachusetts.

DEVELOP and print your own films. Complete formulas, 60c (no stamps). Results guaranteed. Studio "L," Owego, N. Y.

### REAL ESTATE—ORCHARDS

\$550 FULL Price Secures 30-Acre Farm, Furniture, Crops—potatoes, turnips, cabbage, etc.; near village; cozy 5-room house, piped water, 40-ft barn. All \$550, part cash. Details page 26 big illus. Bargain Catalog. Free. Strout Farm Agency, 150BH Nassau St., New York City.

PECAN-ORANGE Groves "on the Gulf." \$10 monthly. Guaranteed care. Soon produce \$500.00 yearly. Suburban Orchards, Dept. 8., Biloxi, Mississippi.

LEARN Real Estate and Building Business. \$3.00 Complete Course. Casto Realty System, 915-E-Main St., Columbus, Ohio.

### FOR SALE

ROCKS and Minerals for sale—Hundreds of varieties—Price List, 5c. P. Zodac, 157 Wells St., Peekskill, N. Y.

ALL wool yarn for sale from manufacturer, 75c to \$2 per lb. Free samples. H. A. Bartlett, Harmony, Maine.

DUPLICATING machine (Rotospeed) for sale. Used but little, it's just like new. Complete with stencil sheets, ink, instructions and everything for immediate use. First \$30.00 takes it. Arthur J. Dunkel, Dolgeville, N. Y.

### CIGARS AND CIGARETTES

CIGAR Smokers! Factory to Smoker System Saves You Half; write for particulars and special offer. Montrose Cigar Factory, Dept. A, 4004 Montrose Ave., Chicago, Ill.

### NOVELTIES

NATURE'S Greatest Wonder, wood turned to stone. It has taken Nature thousands of years to accomplish this amazing phenomenon. Rare novelty. For one dollar I will send you a piece of this petrified wood, cut and highly polished, ready for mounting in stick pin. An ideal present for relative or friend, and something they will always be proud of. J. E. Rynning, 4910 Seventh Ave., Los Angeles, Calif.

### OPTICAL GOODS

ARTIFICIAL eyes, \$3. Booklet free. Denver Optic, 508 Barclay, Denver, Colorado.

### FOR MEN AND WOMEN

DETECTIVES—Work home or travel. Experience unnecessary. Write George Wagner, former Government Detective, 1968P Broadway, New York.

ALL men 45 or over must have my aid. No medicine, electricity or humbug. Richards, Box 2402, Boston, Mass.

INDIAN made baskets, blankets, Wampum, Catalog. Gilham, Kelseyville, Calif.

### MISCELLANEOUS

ABSOLUTELY new mail order plan. New article, few dollars will start. Complete details for \$2. Circular free. W. H. Blair, Box 10, Lamoni, Iowa.

ARE you old at forty? See our advertisement on page 154 of this issue. The Electro Thermal Company, 4042 Main Street, Steubenville, Ohio.

FORMS to cast Tin Soldiers, Indians, Marines, Trappers, Animals. Send 5c for Catalogue. Henry C. Schiercke, 1034 72nd St., Brooklyn, N. Y.

AUTO STROP RAZORS, automatically sharpen their own blades, shaves and are cleaned without removing blade from holder. Price \$1.25. Eastern Label Co., Clintonville, Conn.

### PATENT FOR SALE

VALUABLE electric rotary brush for shining shoes, etc. Also Drying apparatus for curing crops. Outright or royalty. Full particulars address Tobias A. Johnson, 59 O'Brien St., North Bay, Ontario, Canada.

More Money Making Opportunities on pages 10 to 28






I am averaging anywhere from \$75 to \$150 a month more than I was making before enrolling with you. I would not consider \$10,000 too much for the course.  
(signed) A. N. Long,  
Greensburg, Pa.



No sooner had I received my discharge (as a buck private) than I opened a radio shop of my own. I earned over \$3,500 in 1 year. I wouldn't have missed the N. R. I. course for a million dollars.  
John P. Zinno,  
Corona, L. I.

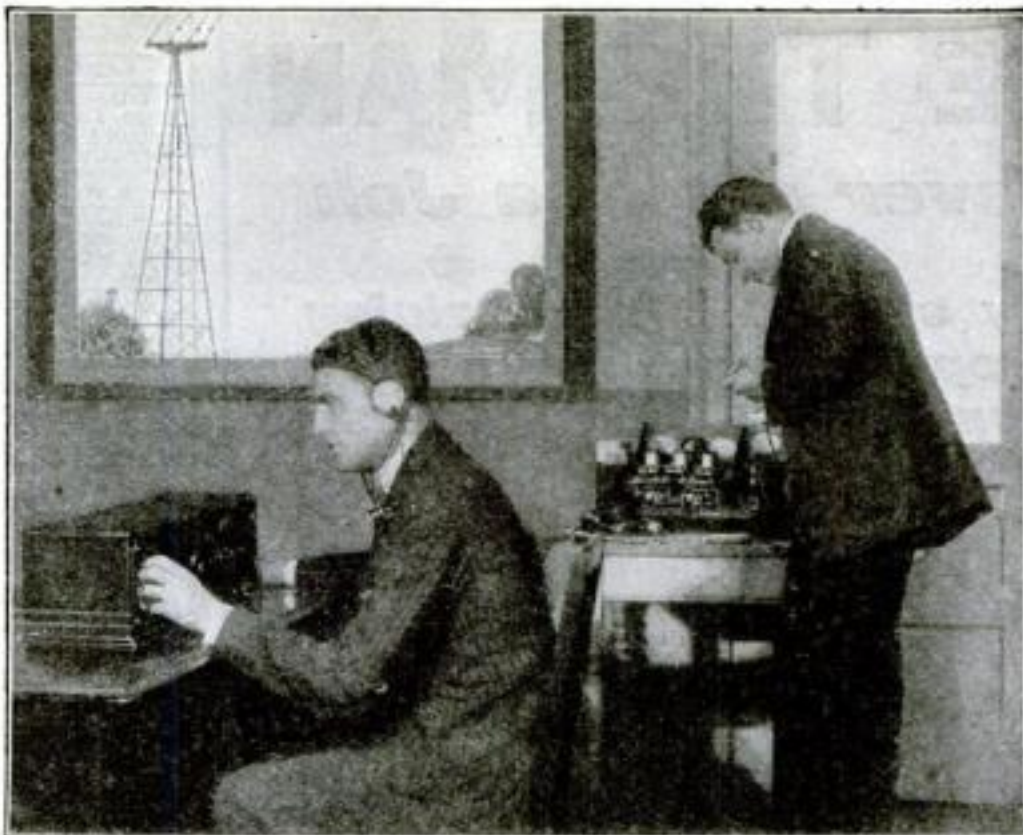

Before I enrolled with you I was making \$15 a week on a farm. Now I earn from \$2,080 to \$4,420 a year. And the work is a hundred times easier than before. Since graduating a little over a year ago, I have earned almost \$4,000 and I believe the course will be worth at least \$100,000 to me.  
(signed) Geo. A. Adams,  
Tamaqua, Pa.



I can very easily make double the amount of money now than before I enrolled with you. Your course has benefited me approximately \$3,000 over and above what I would have earned had I not taken it.  
T. Winder,  
Grand Junction, Col.

# Prepare Yourself For Radio — the New Profession

## Many N.R.I. Graduates Now Earning From \$50<sup>00</sup> to \$200<sup>00</sup> a Week

**T**HE biggest, best-paying field open to ambitious men today. Thousands needed at once for pleasant, interesting jobs. High Pay—Short Hours. No experience required. Learn in your spare time at home.

Here is work that is fascinating, new and easy—an industry which is growing more rapidly than any other in the world today—an industry that offers you the chance of a lifetime to "get in on the ground floor" and make big money. Right now, thousands of trained men are needed in all branches of the business. Radio operators, radio engineers, salesmen, mechanics and Radio executives are scarce and receive wonderful pay. Are you going to shut your eyes to this golden opportunity when there is a quick, easy way to get one of these splendid positions?

You can train for this "big money" field right in your own home—in your spare time. No matter how little you know about electricity or Radio, the National Radio Institute—the largest and best school of its kind in the world—will guarantee to give you a thorough Radio training in a few short months.

### Salaries Doubled and Tripled

Since the National Radio Institute was founded in 1914 over 15,000 men and young men have taken this shortcut to Success in Radio. They are en-

thusiastic about this wonderful Course.

E. W. Barnes, Norfolk, Va., writes: "During my spare time, I make about as much repairing radio sets and building them as my regular salary."

In a letter from Arthur Ruse of Toronto we read that he has doubled his income since mastering Radio and that he earns from \$50 to \$100 a month in his spare time.

This page contains only a few of the thousands of letters we receive from successful graduates. Hardly a week goes by without our receiving urgent calls for our graduates.

"We need the services of a competent Radio Engineer."

"We want men with executive ability in addition to radio knowledge to become our local managers." "We require the services of several resident demonstrators"—these are just a few small indications of the great variety of opportunities open to our graduates.

This is an absolutely complete Radio Course now being offered

which qualifies you for a Government First Class Commercial License and really gets you the bigger paying jobs in Radio.

### Send Today for Free Book and Special Short-time Offer

Don't rely on this announcement for a true picture of the opportunities in Radio. Simply mail the coupon and we will send you a big free book "Rich Rewards in Radio," which will show you actual proof of the big money being made by our graduates today. It will describe the course in full detail, it will tell you just how much you can earn in this fascinating profession. Best of all, you will get the details of our Special Reduced rate which is being offered for a short time. So, mail the coupon now! Make this your lucky day!

### The National Radio Institute

Dept. 12-DB, Washington, D. C.

### Study In Your Spare Time At Home

This is the time to go into radio. Big opportunities are now open in every branch of the work, and salaries were never so high. The thing to do is to begin studying at once, in whatever time you can spare, so that you will be able to qualify for the position you want when the time comes. Only an hour or so every evening will quickly prepare you for radio—a profession you cannot fail to find fascinating and pleasant. Don't handicap yourself; start at once and advance with the others.

The National Radio Institute,  
Dept. 12-DB, Washington, D. C.

I am interested in radio as a profession. You may send me, free and without obligation, your interesting book, "Rich Rewards in Radio," all information about your spare time, home-study plan and about your free employment service. Also, the details of your Special Offer.

Name.....Age.....

Street.....

City.....State.....





# BE THE MAN

## Never out of a Job

**My special Shop Training Prepares you for steady Employment, or a business of your own, earning big money—Erwin Greer**

## MEN WANTED

for jobs paying  
\$50 to \$125 per week!

Thousands of high-pay automotive positions are open for men who have the training necessary to fill them. Hundreds of these jobs are offered by our Free Employment Bureau. YOU can have one of these big money jobs. Eight weeks of interesting training at Greer College will qualify you for big earnings. Then you are equipped for life.

### Go in Business for Yourself

Greer training equips you to own and run your own garage or repair shop. You can start with small capital (\$25 to \$50) and buy new equipment as your business grows. Thousands have started this way. We will teach you how.

### Earn While You Learn FREE EMPLOYMENT SERVICE

Our Free Employment Bureau will help you get an earn-while-you-learn job and place you when you graduate. Only a small payment down on selected course is necessary. Here in the big Greer shops you get actual work on 4, 6, 8 and 12 cylinder engines. Complete Greer Course includes Machine Shop Practice—Shop Management—Selling—Truck, Tractor and Automobile Repairing—Lighting—Starting—Vulcanizing—Storage Batteries—Driving—everything required to make you an all-around automobile expert.

### Day and Evening Classes

Outside work need not interfere with instruction in the big Greer shops. You will find our training hours suited to your convenience. Call on us. Or—

### Mail the Coupon


for BIG FREE BOOK, "How to Succeed in the Automobile and Tractor Business." We will also send Special Tuition Offer and complete information about jobs.

**GREER**  
COLLEGE  
Automotive  
Engineering

2024 S. Wabash Avenue,  
Dept. 3202, Chicago, Illinois

## Get This FREE BOOK —Learn how one of these jobs can be yours —

**Automobile Repairsman**  
—\$125 to \$250 per month.  
**Head Automotive Mechanic**  
—\$150 to \$500 per month.  
**Automobile Salesman**  
—Up to \$20,000 per year.  
**Garage Owners**  
—\$300 to \$5,000 per mo.  
**Garage Managers**  
—\$150 to \$350 per month.  
**Storage Battery Men**  
—\$150 to \$300 per month.  
**Electrical Experts**  
—\$175 to \$350 per month.  
**Truck and Tractor Men**  
—\$6.00 to \$10.00 per day.  
**Tire Expert**  
—\$150 to \$250 per month.  
**Chauffeur**  
—\$80 to \$150 per month.  
**Repairsman**  
—\$125 to \$250 per month.

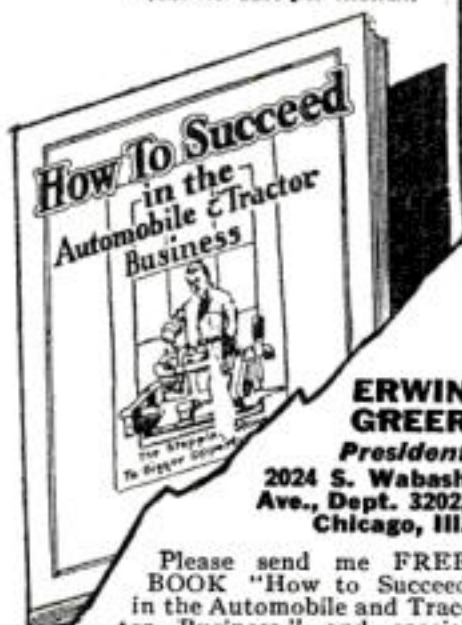

Please send me FREE BOOK "How to Succeed in the Automobile and Tractor Business," and special training offer. This request does not obligate me in any way.

Name.....

Address.....

## Learn to Mount Birds

Learn at home to mount birds, animals, game heads; taxidermy, make rugs and robes. Complete lessons. Easily and quickly learned by men, boys and women. Write for Free Taxidermy Book. Tells all about it. Every sportsman, trapper and nature lover should know this wonderful fascinating art. Save your trophies. Big profits. Success guaranteed. 75,000 graduates. Investigate. Write for Free Book. Northwestern School of Taxidermy 1782 Elwood Bldg., Omaha, Neb.

## BE AN ARTIST

**BIG PRICES PAID FOR DRAWINGS**  
Turn your talent into money. We can teach you drawing in your home during spare time. Well-trained artists earn from \$40 to \$200 a week. Thousands of publishers and advertisers need the work of good artists. The MODERN METHOD is an easy way to learn to draw original pictures. Write today for full particulars showing opportunities for you. State your age.  
MODERN INSTITUTE OF ART  
7 East 42nd Street, Dept. 42 New York City

## \$1000 REWARD!!

Big awards like this are being made every day to the trained Finger Print Expert. Share in these rewards. There is a wonderful opportunity for the trained Finger Print man. Besides, high grade detectives and secret service men are usually Finger Print Experts. Enroll now under my personal training and I will give you a fine professional Finger Print Unit and a valuable course in Secret Service Intelligence—both FREE.  
**Write today** I will send you Free Secret Service Reports and tell you about the fine jobs waiting for the trained Finger Print Expert. Write Today.  
U. S. SCHOOL OF FINGER PRINTS  
7003 North Clark Street, Dept. 13-62 Chicago, Illinois

**LAW STUDY AT HOME**  
Become a lawyer. Legally trained men win the highest positions and biggest success in business and public life. Be independent. Greater opportunities now than ever before. Big corporations are headed by men with legal training. Earn \$5,000 to \$10,000 Annually.  
We guide you step by step. You can train at home during spare time. Degree of LL. B. conferred. LaSalle students practicing law in every state. We furnish all text material, including fourteen-volume Law Library. Low cost, easy terms. Get our valuable 168-page "Law Guide" and "Evidence" books free. Send for them NOW.  
LaSalle Extension University, Dept. 183-L, Chicago  
The World's Largest Business Training Institution

## Money Making Opportunities

### LABORATORY AND CHEMICAL SERVICE

GUARANTEED Reliable Formulas, Trade Secrets, Rare, Dependable Manufacturing Processes for all lines, detailed working directions, "inside" commercial information. Don't buy till I've sent you my Valuable Literature. Lists. Satisfaction Guaranteed. Dr. Liscomb Miller, Industrial Chemist, Tampa, Florida.

WHAT do you want to Manufacture? \$2 will bring guaranteed formula for any product, complete instructions. Consulting Chemists Bureau, Box 1709, Boston, Mass.

YOUR chemical problem solved. Formulas and processes for every business and for any purpose. Practical working formulas a specialty. Write me. W. Stedman Richards, Consulting Chemist, Box 2402, Boston, Mass.

### FORMULAS

FORMULAS. New, different. Guaranteed. Make your own extracts, flavors, syrups, beverages, etc. Valuable information free. Meriden Co., 3320 White Bldg., Seattle, Wash.

SUCCESSFUL selling plans and 540 formulas, 50 cents. Pentland Co., Norwalk, Conn.

ARTICLE costs 50c to make. Sells for \$8.00; repeater; sells the year around. Sample, 25c. Mitchell-Ames Co., Edinburg, Illinois.

### FOR INVENTORS

PATENTS—Write for Guide Books and "Record of Invention Blank." Send model or sketch of your invention for our free Examination and Instructions. See advertisement on page 153. Victor J. Evans & Co., 156 Ninth, Washington, D. C.

INVENTORS' Educator: 900 Mechanical Movements 50 Perpetual Motions. How to procure and sell patents Mechanical Movements greatly assist Inventors, suggest new ideas. Explains how to select an attorney and avoid Patent Sharks. Price \$1.50. Postage free. Albert E. Dieterich, 681 Ouray Building, Washington, D. C.

CASH for the better patents and pending patents. Write promptly. American Patents Corporation, Barrister Building, Washington, D. C.

UNPATENTED Ideas Can Be Sold. I tell you how and help you make the sale. Free particulars (Copyrighted). Write W. T. Greene, 805 Jenifer Building, Washington, D. C.

PATENTS Sold; or placed on Royalties, for immediate action write Arthur S. Billings, Suite 401 Dekum Bldg., Portland, Oregon.

HAVE you an invention or patent for sale on cash or royalty basis? Do you wish to buy a practical, money-making invention? Write us definitely what you have or want. We bring seller and buyer together. Address Western Security Co., 302 Hannibal, Mo.

MARKET your own invention. Stronger patents for less money. Booklet free. Chartered Association of American Inventors, 635 F Street Washington, D. C.

GET Your Own Patents. Instructions \$1. Cooper Cutting, Campbell, Calif.

INVENTIONS Commercialized. Patented or unpatented. Write Adam Fisher Mfg. Co., 183 Enright, St. Louis, Mo.

### PATENT ATTORNEYS

PATENTS—Before disclosing an invention the inventor should write for our blank form "Record of Invention." This should be signed, witnessed and returned to us together with model or sketch and description of the invention for Free Examination and Instructions. Our Three Books mailed free to inventors. Our illustrated Guide Book, "How to Obtain a Patent," contains full instructions regarding patents. Copies of unsolicited letters from manufacturers and others who are constantly writing us regarding the purchase or leasing of meritorious patents sent upon request. See advertisement on page 153. Victor J. Evans & Co., 937 Ninth, Washington, D. C.

UNPATENTED Ideas Can Be Sold. I tell you how and help you make the sale. Free particulars (Copyrighted 1923). Write W. T. Greene, 811 Jenifer Building, Washington, D. C.

"INVENTOR'S ADVISER" the valuable Patent book with 139 mechanical movements and illustrations, sent free upon request.—M. S. Labiner, Patent Attorney, 3 Park Row, New York.

PATENTS, trade marks, copyrights. Prompt, personal reliable service. Over 30 years' active practice. Write for terms. Book free. Address E. G. Siggers, Box 1, N. U. Building, Washington, D. C.

INVENTORS: Send sketch or model for free opinion concerning patentable nature and exact cost of patent. Book, "How to Obtain a Patent," sent free. Tells what every inventor should know. Established twenty-eight years. Highest references. Prompt service. Reasonable charges. Chandler & Chandler, 478 Seventh, Washington, D. C.

THE PATENTOME. Impartial advice to inventors and Manufacturers. Mailed on request. Anderson & Son, Patent & Trade Mark Lawyers, Established 1865. 636 F St., Washington, D. C.

H. F. LOWENSTEIN, Registered Patent Attorney, Technical expert. 817 McLachlen Building, Washington, D. C.

PATENTS. Booklet free. Highest references. Best results. Promptness assured. Watson E. Coleman, Patent Lawyer, 644 G Street, Washington, D. C.

INVENTORS' Guide free on request; gives valuable information and advice for all who have original ideas or improvements. Frank Leberman, Registered Attorney and Engineer, 15-S Park Row, New York.

STRONGER patents for less money. Booklet free. Chartered Association of American Inventors, 635 F Street, Washington, D. C.

PATENTS procured; Trade Marks Registered—A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard B. Owen, 44 Owen Bldg., Washington, D. C., or 2276-Z Woolworth Bldg., New York.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Address your inquiry to: Manager, Classified Advertising, Popular Science Monthly, 250 Fourth Ave., New York.

**More Money Making Opportunities  
on pages 10 to 28**



# You Might Laugh at This New Way to Grow Hair

—But Here's **POSITIVE PROOF** of What I Am Doing Everywhere

These are true letters sent me by some of the thousands of people who have taken my remarkable new treatment for baldness and falling hair. These are not rare instances. Enthusiastic letters are pouring in daily, telling of the astonishing results being secured everywhere—through use of my scientific system. What better proof is there that I can actually *grow new hair*? To try my new discovery you need not risk a cent. For I positively *guarantee* results or charge you nothing. Mail the coupon for free booklet describing my system and 30 Day Trial offer in detail.

By **ALOIS MERKE**

Founder of Famous Merke Institute  
Fifth Avenue, New York

**A** NEW growth of hair in 30 Days—or no cost! This may sound impossible to you. But just read the statements from users of my method printed on this page. These are true excerpts from original letters and are typical of hundreds of others in our files which are open at all times to the inspection of any one interested.

I don't say my system will grow hair for everyone. There are some cases of baldness that nothing in the world can help. But I've grown new hair for so many thousands of others who had given up hope that I am entirely willing to let you try it at my risk for 30 Days. Then, no

matter how fast you are losing your hair—no matter how little of it there is now left—if you are not more than delighted with the growth of hair produced I will instantly and gladly mail you a check refunding every cent you have paid me. That's my absolute **GUARANTEE AND YOU ARE THE SOLE JUDGE.** I take all the risk. You take none whatever.

## Entirely New System

Most people believe that when their hair falls out the roots are dead. But I have proven that in the majority of cases the hair roots are merely dormant—inactive.

Through under-nourishment, dandruff and other causes the starving, shrunken hair roots have literally gone into a state of "suspended animation."



Who Else  
Wants a  
New Head  
of Hair  
Like This?

Tonics, ointments, massages, crude oil, etc., fail to grow new hair because they do not reach these dormant hair roots, but instead simply treat the surface of the scalp. To make a tree grow you would not rub "growing fluid" on the bark. Instead you would get right to the roots. And so it is with the hair.

My new method provides an effective way of properly treating dormant hair roots and stimulating them into a new and natural growth. And the fine thing about my system is the fact that it is *simple* and *inexpensive* and can be used in any home where there is electricity, without the slightest *discomfort* or *inconvenience*.

## Mail Coupon Now

The very fact that you have read this announcement shows that you are anxious about the condition of your hair. So why not investigate? Find out for yourself. That's the only common-sense thing to do.

If you will merely fill in and mail the coupon below I will gladly send you without cost of obligation a wonderfully interesting booklet which describes in detail my successful system which is growing new hair on happy heads all over the country. Clip and mail the coupon today. Allied Merke Institutes, Inc., Dept. 172, 512 Fifth Ave., New York City.

## Read These Letters

### NEW HAIR GROWING

"Results are wonderful. My hair has stopped falling out and I can see lots of new hair coming in."—F. D. R., Washington, D.C.

### New Hair on Bald Spots

"I have used Thermocap Treatment for 8 weeks and although the top of my head has been entirely bald for 6 years the results up to the present are gratifying. In fact, the entire bald spot is covered with a fine growth of hair."—W. C. Kenmore, Ohio.

### Can't Say Enough for It

"Am glad to say I can see such great change in my hair. It is growing longer and my head is full of young hair that has made its way through since I have been using Merke Thermocap. I can't say enough for it. It will do everything you claim it to do."—G. G., Texas.

### Results Gratifying

"Ten years ago my hair started falling. I used hair tonics constantly but four years ago I displayed a perfect full moon. I tried everything—but without results. Today, however, thanks to your treatment, I have quite a new crop of hair one inch long."—F. H. B., New York.

### Hair About Gone

"My hair had been falling for the last two years and I had hardly any more hair on the front of my head. But since I started using your treatment I am raising a new crop of hair. Your treatment is best I ever saw."—O. J., Northbridge, Mass.

### Falling Hair Checked

"My hair was coming out at an alarming rate but after four or five treatments I noticed this was checked. My hair is coming in thicker and looks and feels full of life and vigor."—W. C., Great Neck, L. I.

## NOTE

These testimonials used in connection with the Merke Thermocap Treatment are true extracts from original letters on file in the Allied Merke Institutes, which files are open to the inspection of any one interested, at all times. Many other letters will be sent with your free booklet, together with affidavit certifying to them.



Get This Book

**ALLIED MERKE INSTITUTES, Inc.**  
Dept. 172, 512 Fifth Ave., New York City

Please send me—without cost or obligation a copy of your book describing the Merke System.

Name.....  
(State whether Mr., Mrs. or Miss)

Address.....

City..... State.....



## \$90 Drafting Course FREE

There is such an urgent demand for practical, trained Draftsmen that I am making this special offer to deserving, ambitious men. I will teach you to become a Draftsman and Designer until you are drawing a salary of \$250.00 a month.

## \$300 a Month Salary—\$450 on the Side At Home

That's the kind of money my drafting students make. Read what this one says:



"As a beginner I am doing fine. Am earning a salary of \$300 per month, besides I made over \$450 at home the last two months, drawing plans for private parties. The practical drafting training you gave me by mail put me where I am in less than six months' study. Thank you for all your personal interest and help you gave me so far." (Signed) J. B. Dobe  
(Name and address upon request.)

Write and I'll tell you how I make you a big-money-earning draftsman in a few months!


### I Guarantee

To train you until you are placed in a position paying up to \$250 and \$300 a month.

I give you personal training at home by mail until you are actually placed in a position paying up to \$250 and \$300 a month. Six thousand draftsmen wanted every month.

## FREE — Drafting Outfit Drawing Table

I give you a whole set of drafting tools and a drafting table the minute you become my student. Every tool you need. All you require to build your success in draftsmanship.

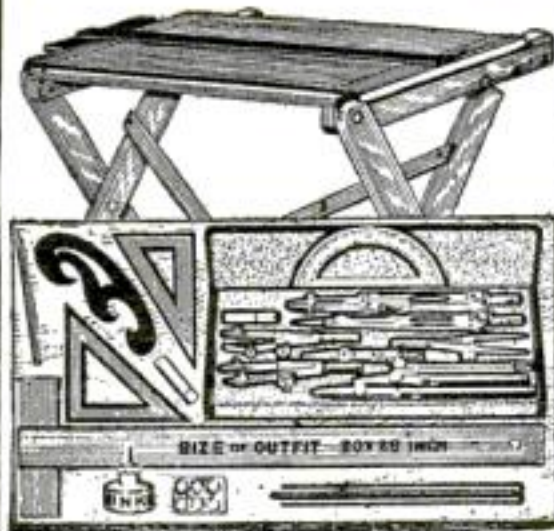

## Mail Coupon

at once for my great book—"Successful Draftsmanship." All about the marvelous opportunities ahead. Great salaries and possibilities. Send the coupon for free book TODAY!

**CHIEF DRAFTSMAN DOBE**  
1951 Lawrence Ave., Div. 13-62 Chicago  
Without any obligation to me please mail your book, "Successful Draftsmanship," and full particulars of your liberal "Personal Instruction" offer to a few students. It is understood I am obligated in no way whatever.

Name..... Age.....  
Address.....

## Money Making Opportunities

### PATENT ATTORNEYS

**PATENTS.** Write for my free Guide Books, "How to Obtain a Patent" and "Invention and Industry" and "Record of Invention" blank before disclosing inventions. Send model or sketch of your invention for instructions. Promptness assured. No charge for above information. Clarence A. O'Brien, Registered Patent Lawyer, 1849 Security Bank Building, directly across street from Patent Office, Washington, D. C. See page 151.

**ESTABLISHED 1864.** Milo E. Stevens Company. Free Booklet. Patents, Trade-marks, Copyrights. Offices, Leader Building, Cleveland; Monadnock Block, Chicago; Barrister Building, Washington, D. C.

**HERBERT JENNER,** patent attorney and mechanical expert, 606 F Street, Washington, D. C. I report if patent obtainable and exact cost. Send for circular.

**INVENTORS—**Send for form "Evidence of Conception" to be signed and witnessed. Form, fee schedule, information free. Lancaster and Allwine, Registered Patent Attorneys in United States and Canada, 232 Ouray Bldg., Washington, D. C.

**PATENTS for Inventions.** Long experience, highest grade work, rates reasonable, best references. Advice as to patentability. Wm. Ashley Kelly, 41 Park Row, New York.

**MILLIONS** spent annually for ideas! Hundreds now wanted! Patent yours and profit! Write today for free books—tell how to protect yourself, how to invent, ideas wanted, how we help you sell, etc. American Industries, Inc., 501 Kresge Bldg., Washington, D. C.

**MONROE MILLER,** Ouray Bldg., Washington, D. C., Patent Attorney; Mechanical, Electrical Expert. Free Blue Book gives candid advice.

**LACEY Patent-Sense.** "The Book the Inventor keeps." Free. See page 150.

### AGENTS AND SALESMEN WANTED

**SALESMEN Distributors** wanted. Ours is an exceptionally lucrative proposition—a permanent and profitable business connection, not a job. Product nationally advertised—easy to sell. Generous profits. One sale a day produces income of \$5,000 a year. Let us put the facts before you. Write CFSCO, 14 N. 10th St., Richmond, Indiana.

**\$75 A week.** Man wanted with ambition and industry, to distribute Rawleigh's Household Products to steady users. Several fine openings still available in cities and towns. We train and help you so you can make up to \$100 a week or more. No experience necessary. Pleasant, profitable, dignified work. Write today. W. T. Rawleigh Co., Dept. NY 9953, Freeport, Ill.

**AGENTS—Best seller:** Jem Rubber Repair for tires and tubes; supersedes vulcanization at a saving of over 800 per cent; put it on cold, it vulcanizes itself in two minutes, and is guaranteed to last the life of the tire or tube; sells to every auto owner and accessory dealer. For particulars how to make big money and free sample, address Amazon Rubber Co., 504 Amazon Building, Philadelphia, Pennsylvania.

**BUILD permanent business.** Men's, Women's, Children's guaranteed shoes direct to wearer. A. P. Condon, Sales Manager Allen Shoe Co., 110 Summer, Boston.

**DUSTLESS Sponge Cloth, New Invention.** (1) Rub—Dusts, Cleans and Polishes Automobiles, Furniture, Pianos. Retail 50c.—Costs 16c. Sample Free. NuLife Sponge, Hartford, Conn.

**AT LAST! Diamond Rival Discovered!** Amazing blue-white Rajah Gem astounds jewelry world and deceives experts! Beautiful Sample case Free! \$100 weekly! Write quick! Rajah Diamond Co., Dept. F-41, Salisbury, N. C.

**\$100 WEEKLY** easy, selling Oriental perfumes. Hundred per cent profit. Sample case absolutely free. Write Romola Parfumerie, Inc., Woodlawn, Chicago.

**AGENTS.** 200% profit selling the new Miracle Water Plant. Lives forever. Sample plant with illustrated Catalogue of Desert Plants, 25c. Bargain offers. Canutillo Curto Co., Canutillo, Texas.

**GET our plan** for monogramming automobiles, trucks, hand luggage and all similar articles by transfer method; experience unnecessary; exceptional profits. Motorists' Accessories Company, Mansfield, Ohio.

**AGENTS:** Something new. Wonderful invention! Ford owners wild over it. Distributors profit 300%—thirty day trial offer. Write L. Super, 1304, Fondula, Milwaukee, Wis.

**FREE Samples—"Rain Shield Wiper,"** retails \$1.00—cost 25c. Just Invented. No Cloth—No Paste—No Attachment. Sold Clear and Rainy Days—(1) Rub keeps Windshield Clear (24) hours. Automobiles buy quickly. Riley made \$198.00 three days. Experience unnecessary. Wonderful Sideline. NuLife Corporation, Hartford, Conn.

**BIG money and fast sales.** Every owner buys gold initials for his auto. You charge \$1.50; make \$1.35. Ten orders daily easy. Write for particulars and free samples. American Monogram Co., Dept. 47, East Orange, New Jersey.

**AGENTS** wanted. \$60-\$200 a week. Genuine Gold Letters for store windows. Easily applied. Free Samples. Liberal offer to general agents. Metallic Letter Co., 434A, North Clark, Chicago.

**AGENTS,** both sexes, we manufacture and control new household article. Fast seller. Big profits. Exclusive territory. Write now. Connolly, 123 Liberty St., New York.

**BIG money—Easy sale!** New automatic Envelope Sealer—needed in every office. Retail \$2.00. Geo. T. Pritchard, Box 1203 Norfolk, Va.

**WANT money?** Lots of it? Sell Perry Photo Medallions and Lykoll Paintings of loved ones. Novel. Appealing. Easy to sell. \$15 to \$40 a day. Advance commissions. Write, Perry Photo Novelty Corp., 1797 Jerome Ave., New York.

**AGENTS—**Our gold-eyed needle case proposition is positively good for \$50 to \$300 weekly, proof and particulars free. Sample outfit 15c, factory prices. Paty Needle Co., 232 Davis Sq., Somerville, Mass.

**DISTRIBUTERS.** Salesmen. Agents make 200% profit selling Gas-O-Pep Tablets for automobiles, tractors and oilburners. Guaranteed to remove carbon, increase mileage and power. Big gas saver. Get your territory now. Taylor Products Mfg. Co., 22 West Naghten, Columbus, Ohio.

**NEW Improved Automatic Ad-Stamp** just out. Salesmen and sideline men be wise and get in line. Automatic Ad-Stamp, Joplin, Mo.

**More Money Making Opportunities**  
on pages 10 to 28

## New Ray Instantly Relieves Pain Way Beneath the Surface



Penetrates to the deep-lying joints and muscles and quickly drives out the aches and soreness of Rheumatism, Neuralgia, Neuritis, Sciatica, Lumbago, etc. Wonderful for skin afflictions.

**A**T last those crippling pains that torture and twinge have been defeated. Here is instant comfort and new health for those who suffer from aching nerves, gripping muscles, tendons, joints, ligaments and bones. A new invention that sends curative rays of combined light and heat as far as four inches beneath the surface of the body has been perfected. It is giving instant and lasting relief to thousands of sufferers. It is clearing up old complaints that could never be reached by surface applications—by plasters, poultices, hot water bags, and other methods.

The Stein-O-Lite Ray has the restorative, healthful value of the sun's rays. It gives a penetrating, healing bath of light and heat rays—sunlike rays that go deep and subdue pain instantly.

The quick relief from pain that Stein-O-Lite gives is now available to everyone who has electricity in his home. Every household should have Stein-O-Lite. It is priceless in such emergencies as sudden toothache, earache, cramps, etc. Stein-O-Lite is endorsed by physicians and in use in leading hospitals.

Send the coupon below for the free Stein-O-Lite book that tells and illustrates the marvelous powers of this new remarkable ray. Take advantage of the present 15-day trial offer. Mail the coupon now to Stein-O-Lite Co., Dept. 92, 133 Floyd St., Brooklyn, N. Y.

### Send Coupon for Free Book

STEIN-O-LITE Co., Dept. 92  
133 Floyd St., Brooklyn, N. Y.

Please send me without cost or obligation on my part, your interesting booklet describing the new Stein-O-Lite Treatment and details of your special 15-Day Trial Offer.

Name.....  
Address.....  
City..... State.....

## Stop Using a Truss



Reduced  
Fac-Simile  
Gold Medal



Reduced  
Fac-Simile  
Grand Prix

**STUART'S PLAPAO-PADS** are different from the truss, being mechanico-chemical applicators made self-adhesive purposely to hold the distended muscles securely in place. No straps, buckles or spring attached—cannot slip, so cannot chafe or press against the pubic bone. Thousands have successfully treated themselves at home without hindrance from work—most obstinate cases conquered. Soft as velvet—easy to apply—inexpensive. Awarded Gold Medal and Grand Prix. Process of recovery is natural, so afterwards no further use for trusses. We prove it by sending Trial of Plapao absolutely FREE.

Write name on Coupon and send TODAY. **FREE** Plapao Co., 790 Stuart Bldg., St. Louis, Mo.

Name.....  
Address.....  
Return mail will bring Free Trial Plapao

## Gold Plated Aerial Works Wonders

Amazing new antenna **The Goldenrod** won't corrode, lasts lifetime. Used by Government, Ocean Liners, Broadcasting Stations.

### Now Everyone Can Have It

Solid Phosphor Bronze Wire, heavily plated with 18 kt. gold. Gold antenna long known to be best, but too costly. Now thru **Goldenrod** methods of manufacture, every set user can have one.

**FREE** illustrated folder giving complete details and proof of wonderful results from Goldenrod Aerial—"Best Because It's Gold Plated." Write quick and soon get new joys in radio reception.

**IMP RADIO CORPORATION**  
Dept. 196, 6 East Lake Street, CHICAGO





# Are You Always An "Outsider" at a Party?

Do others do all the entertaining—have all the fun—receive all the attention while you sit back and look on? If so, you will be interested in this astonishing short-cut method for learning any musical instrument.

**T**HERE'S no excuse for being an "outsider" at a party. For by means of an amazingly simple method you can quickly learn to play your favorite instrument—right at home!

## No Experience Needed

And you don't need to be talented or know a thing about music. You don't need to spend hours practicing. You don't even need to go to a teacher. The whole course is as simple as A, B, C, and the best part of it is that no matter which instrument you choose—the cost is **only a few cents a lesson!**

There are no tricks—no stunts. You learn from regular music—and you play by **note**—not by ear. Everything is clearly explained and simplified, so that you get all the essentials of a thorough musical education—in short-cut fashion. Already over 350,000 people have tried this New Print-and-Picture Method and have been amazed and delighted with results.

## How To Be Popular

Once you can play a musical instrument, you will never feel alone "in a crowd" for as you dash off the latest song hit—or play some lovely melody from a well-

known classic—you will be the very center of attraction. You will be in great demand. You will be flooded with invitations. And the sooner you start upon this sure path to popularity—the sooner will you find a brighter and happier life.

## FREE BOOKLET Explains New Method

Send for our interesting **Free** booklet—it will give you all the details of this remarkable course. Don't hesitate because you think you have no talent. Thousands of our most successful students never dreamed they possessed the slightest musical ability until it was revealed to them by our wonderful "Musical Ability Test." Now many of them earn big incomes in bands, or orchestras, as music teachers, church organists, vaudeville artists, etc. Others use their music solely for personal pleasure and for the entertainment of their friends. But once you see how quickly and easily you can learn to play your favorite musical instrument this remarkable way—you will not let another day slip by without sending for the course. So send for the **Free Book Now**. Mail the coupon today. U. S. School of Music, 82 Brunswick Bldg., New York City. (**Please Write Plainly.**)

## Play In 3 Months!

Piano	Mandolin
Organ	Drums and
Violin	Traps
Banjo	Harmony and
Clarinet	Composition
Flute	Sight Singing
Harp	Ukulele
Cornet	Piccolo
Cello	Trombone
Guitar	Saxophone
Voice and Speech	Culture
Automatic Finger Control	

U. S. School of Music, 82 Brunswick Bldg., New York City.

Please send me your free book, "Music Lessons in Your Own Home," illustrated folder and particulars of your special offer. I am interested in the following course:

Have you above instrument?.....

Name.....

Address.....

City..... State.....



# Dancing Made Easy — This New Way!

## You Can Learn at Home--In One Night For Almost Nothing!

Now every young man and girl can share the pleasures, fun and popularity that every good dancer enjoys. Even though you do not know one step from another—you can now become a popular dancer and learn any of the very latest steps in one night—right at home—without music or partner

### Five Lessons FREE

So positive is Arthur Murray that anyone can become a good dancer through his new method that he is willing to send absolutely Free, in plain cover, five of his remarkable lessons. They are: A Lesson in Fox Trot, How to Gain Confidence, How to Follow, How to Avoid Embarrassing Mistakes, Secret of Leading. To pay cost of printing and mailing, enclose only 25c. and the lessons will be sent you at once. Don't miss half the fun in life. Let Arthur Murray make you a really good dancer. Send for the Five Free Lessons Now and learn to dance in one evening.

**ARTHUR MURRAY**  
Studio 410 290 Broadway



ARTHUR MURRAY AND HELEN SHIPMAN

ARTHUR MURRAY, Studio 410, 290 Broadway, New York City

To prove that I can learn to dance at home in one evening you may send the FIVE FREE LESSONS. I enclose 25c (stamps or coin) to pay for the postage, printing, etc.

Name.....

Address.....

City.....State.....

## I Fit You for Big Electrical Jobs Like These

### You Can Be Ready in 20 WEEKS

In just 20 weeks you can receive the amazing training of the S. & H. Engineering Company and Lincoln Institute of Technology and be ready to step into big jobs like Unholz and Farina, or G. Melrose, or G. Fields and hundreds of others. No matter what your experience or education, this is an amazing opportunity.



From common laborers to ownership of the U. & F. Electrical Company is what these boys did.


### S. & H. Fits You for Jobs Like These

AFTER many years' study and experimental work there has been developed this remarkable way of teaching electricity right in your own home. This shop type home training is an exclusive copyrighted feature. You can get it nowhere else. And you receive a diploma actually certified and endorsed by the Lincoln Institute of Technology. You get theoretical knowledge as well as experience of doing practical work. That's why this amazing training is the quickest and the simplest ever devised.

Electricity needs you. Right now hundreds of big pay jobs want men. The experts of this great institution know exactly what you need to fit you for these jobs. You can soon be equipped to demand and get the high salaries this profession pays.

### Send for Big Book FREE

If you want to be an electrical expert send the coupon at once. All who send immediately will receive an amazing

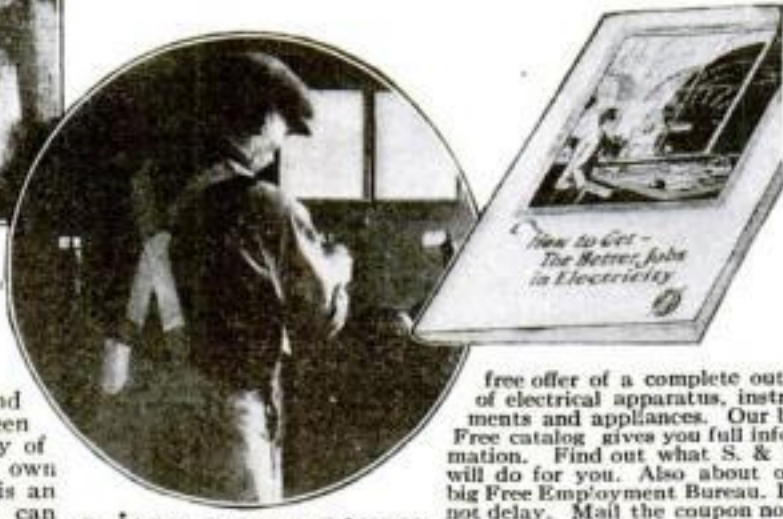

G. Melrose is earning \$400.00 a month now because he was wise enough to take this electrical training of the famous S. & H. Engineering School.

free offer of a complete outfit of electrical apparatus, instruments and appliances. Our big Free catalog gives you full information. Find out what S. & H. will do for you. Also about our big Free Employment Bureau. Do not delay. Mail the coupon now.

**S. & H. ENGINEERING CO.**  
In Affiliation with Lincoln "Tech"  
Dept B-16, 1422 W. Monroe St., Chicago, Ill.

CHIEF ENGINEER,  
S. & H. ENGINEERING CO.  
1422 W. Monroe St., Dept. B-16, Chicago, Illinois  
Please send me catalog and full information about S. & H. Training, your Free Outfit, your Employment Bureau, etc. No obligation.

Name.....

Address.....

City.....State.....

## Money Making Opportunities

### AGENTS AND SALESMEN WANTED

**MANUFACTURE Millerite!** You've read about this New Ethyl-Super-Fuel Ingredient for Gasoline. Increases power, Mileage—Saves Gas—Knocks Carbon—Easily made. Your Profit Immense! Stamp brings Valuable Descriptive Formula, Literature of this and Mendit, Fabrie Mending Cement, Lig tning Electrolyte; Rubber Balloons; Amazon Self-vulcanizing Rubber Repair; Pro-Tex-U, Only Guaranteed Fire E tinguisher; Flynox, few drops kill roomful flies; Marcel, Permanent Hair Curling Fluid; Denta-perl Tooth Whitener. Latest Pure Food Products; Flavors; Beverages; Toilet, Medical; Household; Automobile; Office; Specialties; all lines. You'll be glad you received these lists. Miller, Industrial Chemist, Tampa, Florida.

**INSTANT Weld**—Repairs largest punctures without cement or heat. Lenn's profit one day \$50. Write quick. Free sample. Territory going fast. Tourist's Pride Mfg. Co., Desk R, Minneapolis, Minnesota.

**STAMPING** names on emblem key checks. Sample 20c. Key check outfits, steel dies, key cases, etc. Service Sales Corporation, Shelby, Ohio.

**AGENTS**—Clever invention! Inkspoon makes every pen a fountain pen. Fast office seller, big profit, demand increasing everywhere. Exclusive territory offered. Sample free. H. Marul Company, Tribune Building, New York.

**RADIO** Salesmen Wanted—Make \$50.00 weekly selling standard, well advertised radio sets and parts. No investment necessary. Write for plan and free outfit. Waveland Radio Corporation, 1027 N. State St., Chicago, Ill.

**CAN** you sell? Tailored-to-measure suits at \$19.75. Universal Tailors, 899 Bedford Street, Boston.

**MAKE** extra money. Xmas postal folder, tag combination packs. 10th season. Sell 25c. Sample 15c. Big profits. Ufert, 133 West 15th, New York.

**BIG** money selling gold initials. Quick sales. Every car owner buys. You charge \$1.50—make \$1.44 every sale. Your profit \$20 daily. No license. No experience. "Samples free." Nulife (P) Monogram Company, Hartford, Conn.

**MAKE** \$100 weekly in spare time. Sell what the public wants—long distance radio receiving sets. Two sales weekly pays \$100 profit. No big investment, no canvassing. Sharpe of Colorado made \$955 in one month. Representatives wanted at once. This plan is sweeping the country—write today before your county is gone. Ozarka, 803 Washington Blvd., Chicago.

**SELL** the latest, quickest selling specialties ever known. Famous "Hahway" self-lighting pocket cigar lighters and gas lighters. Low prices. Easily demonstrated. Sell to dealers. Employ sub agents. Exclusive territory. Make over 100% profit. S. Bernhardt, 148 Chambers Street, New York.

**\$300.00 A MONTH** to distribute everyday household necessity in rural and small town districts. No money needed. Million dollar firm behind it. Write for particulars and state territory desired. B. N. Johnson, 611 W. Lake, Chicago.

**AGENTS**—World Radio and Sporting Manual. Quick Cleanup. Sample 10c. Realine Co., K 60-W, Washington, Chicago.

**GET** our free sample case toilet articles, perfumes and specialties. Wonderfully profitable. La Derma Co., Dept. F, St. Louis, Missouri.

**AGENTS**: Big profits. Best and cheapest window letters made. Easily applied. Dime brings five samples. Particulars free. Stalbritte Company, 1115 Second Avenue, New York.

**AGENTS**—\$75.00 Weekly Selling Nustile Guaranteed Hosiery. Your pay daily. You write orders, we deliver and collect. Special monthly bonus. Sample outfit furnished. Nustile Hosiery Mills, Dept. 400, Philadelphia, Penna.

**MAKE** \$25 to \$50 week representing Clows Famous Philadelphia Hosiery, direct from mill—for men, women, children. Every pair guaranteed. Prices that win. Free book "How to Start" tells the story. George Clows Company, Desk 24, Philadelphia, Pennsylvania.

**AGENTS** make \$100 a week placing advertising cigar lighters with glass front. Every dealer wants one. Average profit \$25. Write for free plan. Drake Mfg. Co., Dept. P., Milwaukee, Wis.

**\$20 PROFIT** daily selling needlebooks; cost 3c-5c each; sells 25c; value 50c. Three samples 25c. Catalogue free. Needlebook Specialty Co., 661 Broadway, New York.

**DOES** your trade use Salesboards? The largest and most complete salesboards catalog now off the press. Big commissions. Lincoln Sales Co., Dept. B.L., 212 N. Sheldon St., Chicago.

**EVERYBODY** uses extra ts. Sell Duo Double strength Extracts. Complete line household necessities. Big repeaters. Write today. Duo Co., Dept. E60, Attica, N. Y.

**RUMMAGE** Sales make \$50 daily. Offer wonderful values. We start you. "Wholesale Distributors," Dept. 34, 609 Division Street, Chicago.

**START** profitable business. Silvering mirrors, re-finishing auto headlights, tableware, metal plating. Outfit furnished. International Laboratories, Dept. 27, 309 Fifth Avenue, New York.

**MAKE** \$17 day—Finest extracts, food products, toilet preparations, household necessities. Credit; sample case free. Write for amazing offer. Perkins Products, B-26, Hastings, Nebr.

**AGENTS**—Steady income. Large manufacturer of handkerchiefs and dress goods, etc., wishes representative in each locality. Factory to consumer. Big profits honest goods. Credit given. Send for particulars Freeport Mfg. Co., 24 Main St., Brooklyn, N. Y.

**AGENTS**—Make a dollar an hour. Sell Mendets, a patent patch for instantly mending leaks in all utensils. Sample package free. Collette Mfg. Co., Dept. 467, Amsterdam, N. Y.

**SALESMEN** sell sales and order books, auto, reg. rolls and bill ladings. Large demand. Liberal commission. Wirth Sales Book Co., Dept. P8, Chicago.

**EARN** \$10 daily silvering mirrors, plating and re-finishing metal ware, headlights, chandeliers, bedsteads. Outfits furnished. F. Decle Laboratories, 1133 Broadway, New York.

**WE** start you without a dollar. Soaps, extracts, perfumes, toilet goods. Experience unnecessary. Carnation Co., Dept. 21, St. Louis.

**More Money Making Opportunities  
on pages 10 to 28**



# This FREE BOOK Tells The Easiest Way To Get The Money You Want !

Thousands upon thousands of men have found the one safe, sure, positive way to win fame and prosperity through the simplest kind of work. This remarkable book reveals their secrets, and explains how you can use them to get the money you want—quickly and easily. There may be a fortune for you in this book, so read here how to get it FREE.

**I**N but one profession can men—and women—leap into prosperity almost overnight, where they may enjoy all the luxuries and pleasures money can buy while they are still young! The amazing thing about this wonderful, fortune-making profession is this: that it is open to everybody. Anyone regardless of who he is, what he does, what education he may have had, can learn this great profession and through it attain wealth.

What is this profession? It is **Invention**; the science that makes ideas worth tens of thousands of dollars! Gillette was a traveling salesman. Now he makes **Two and One-half Million Dollars a Year!** The inventor of the snap fastener made such great profits that he paid an *income tax* of \$29,000. We could name hundreds more, from Edison, Bell, Armstrong, down to the least known inventor, every one of whom has jumped from ordinary circumstances—some even from poverty—into a respectable fortune!

## You Can LEARN Invention

"But," you will say, "these men were lucky enough to be born inventors." That is what nearly everyone thinks about inventions and inventors. But it isn't true. Invention isn't luck or chance. It is a precise science based on a few simple laws of thought and action which *you can learn!* Even Edison says so. Read his inspiring message: "*Invention is a science and should be taught as a profession.*"

There's one sure way to prove that you can learn invention—exactly as men learn other trades and professions like mechanics, engineering, book-keeping, law, medicine. If invention is pure luck then men would produce just one invention and rarely any more. But if invention is a *science*, then those who learn its principles should be able to produce many different kinds of inventions.

Of course you are familiar with Edison's inventions. Here are additional examples of less-known inventors. Christopher N. Spencer first invented the breech-loading repeating rifle, which he followed by inventing the thread-spooler, the automatic turret-lathe, the automatic screw-machine, the "pump action" repeating rifle. He was also part inventor of the drop hammer. B. T. Babbitt of soap fame invented the process

of pressing laundry soap in cakes, besides inventing the first commercial baking powder, floating white soap, commercial chemicals, and several railroad devices. Henry Geisman, inventor of the Auto-Strop Safety Razor, is also the inventor of the Autographic Kodak which he sold outright for \$300,000.

## Fifteen Great Inventors Teach Invention Secrets at Home

You could not ask more convincing evidence that Invention is a science and therefore it can be *learned*. Now, for the first time, fifteen great inventors have written down the simple laws of Inventive Science so that anyone who can read and think may profit by them. They reveal the secrets which every successful inventor knows and uses; secrets which inventors hitherto have had to acquire through the bitter experiences of weary years of ceaseless experiment, discouragement, desperation and poverty. What they learned at such a tremendous cost can now be attained by you easily, simply without disappointment, in the comfort of your home.

Think of what it means to have these 15 inventors take you through the whole science of invention—to have them tell you **What to Invent** and **How to Invent**; where to get ideas, how to develop them, how to keep records of the conception and perfection of your ideas, how to apply for patents, how to get patents, how to protect yourself from the trickery through which thousands of inexperienced inventors have been defrauded of their rights, how to dispose of your invention, either outright or on a royalty, so you get the most money from your ideas. These things and hundreds of others just as important to your ultimate success are told you, simply, interestingly, completely, in this one great course on Invention!

## FREE Book Tells All

A wonderful book has just been written explaining this course in further detail. If you are genuinely interested, write for it today, and it will be sent to you free. Learn more about this new course in Inventive Science. Find out how you can learn the secrets of successful invention in a remarkably short time, right in your own home. Learn how you can become an inventor, how you can turn a simple little idea into a fortune. It doesn't cost you a penny, so mail the coupon now.

The Bureau of Inventive Science has no connections with patent attorneys, manufacturers or promoters. Its only purpose is to give ambitious men and women the facts which will help them to learn the secrets of practical invention.

**BUREAU of  
INVENTIVE SCIENCE**  
Dept. 22, Wisner Bldg.,  
Rochester, N. Y.

## Your Ideas May Be Worth a Fortune

How would you like to be the inventor of the Gillette Safety Razor, who makes \$2,500,000 a year? Wouldn't you gladly be the inventor of the snap fastener whose profits were so big that his *income tax* was \$29,000? Wouldn't you willingly change places with the inventor of the President Suspenders who is now worth \$5,000,000? Inventors have made thousands of dollars from such common things as the crimped hair-pin, the metal tip shoelace, the paper safety match, the wire paper clip.

Every day you find ideas for new inventions as simple as these. It may be a new toy for your children. The man who invented the Kid-die-Kar, it is reported, made over \$5,000,000. It may be a new kind of soap. B. T. Babbitt is worth millions of dollars today. It can even be a new kind of broom to make housework easier for millions of housewives. But no matter what it is—if your idea is practical, if it solves a problem, if it satisfies a need—a fortune may be your reward.

**BUREAU OF INVENTIVE SCIENCE, Dept. 22  
Wisner Bldg., Rochester, N. Y.**

Please send me your free book, "The Science of Invention," explaining how 15 great inventors will teach me the secrets of practical invention.

Name.....Age.....

Address.....

City.....



# Car Owners! Get New Gasoline Vitalizer FREE

**Earn \$40 to \$80 a Week  
Spare Time Besides!**

Inventor of Klaxon Horn perfects amazing new super-fuel that removes carbon—increases mileage 10 to 30%—makes starting easy in frosty weather! Offers marvelous money-making opportunity to agents, salesmen and city distributors—full time or spare time! Mail coupon for FREE trial offer.



## Increases Mileage Banishes Knocks and Carbon

**N**O more carbon-choked cylinders—no more salary-eating gasoline bills—no more annoying delays in cold weather—no more splitting headaches or fatal accidents due to carbon monoxide gas! All this is ended now by a marvelous new kind of fuel known as Hutch-Olene!

Only two ounces of this amazing new super-fuel added to 5 gallons of gasoline produces remarkable results! The carbon-knock stops—the hard, brittle carbon in cylinders begins to soften up and disappear—starting becomes easy in even zero weather—and the motor actually uses about 20% less gasoline!

### By Inventor of Klaxon Horn

Hutch-Olene is the only product of its kind with a solid scientific foundation. Perfected by Dr. Miller Reese Hutchison, inventor of the famous Klaxon Horn, the Acousticon and the Dictograph. For 20 years Dr. Hutchison was chief of the Edison Laboratories.

### 15 Million Prospects

Auto owners everywhere are now using inferior and often harmful Gasoline Tonics. Even the most ordinary of these tonics are selling like wild fire because the public knows that gasoline itself is inadequate. Millions of dollars have already been spent "educating" motorists to use gasoline tonics. And Hutch-Olene—the gasoline vitalizer—comes right at the peak of the demand! No wonder salesmen are "cleaning up!"

**SALESMEN  
EARN  
\$100 TO \$200  
A WEEK**

### Big Money Being Made

You can start in on practically no capital—the profit on the first order starts you on the road to big money. You need not give up your present job—you need not drop your other lines in order to make good money with Hutch-Olene. Hundreds of agents and salesmen are now selling Hutch-Olene in spare time and are making \$10 to \$25 a day. Scores of live-wire salesmen who devote their full time to selling Hutch-Olene are making \$100 to \$200 a week!

### Special Free Offer

If you want to try out the most marvelous automotive discovery of the age—if you want to end your "carbon troubles" and get 10 to 30% more mileage from your gasoline—if you want to make a lot of money quickly on a small investment—mail the coupon now for our Special Free Trial Offer! Act quick. Mail this coupon now!

**HUTCH-OLENE COMPANY, Dept. 12,  
334 Fifth Avenue, New York City.**

Gentlemen: Send me full particulars about your Special Free Offer and show me how to earn \$100 to \$200 a week selling Hutch-Olene. This does not obligate me in any way.

Name.....  
Address.....  
City..... State.....

**\$25.00 in PRIZES**

See top of page 10 in front of book for details.

## A BETTER JOB NOW—FOR YOU

**EARN \$2,000 TO \$10,000 A YEAR!**

Why work for small pay? Learn a good trade. Know autos—how to repair them. Get a better job—**Now!** Or a business of your own. Learn in a few weeks here at the great auto-trade school in the heart of the auto industry. Think of the repair work on fifteen million cars! There are not nearly enough trained men to do this work. **TRAINED Auto Men Are Wanted!** You can be a skilled mechanic and auto electrician and **Earn Big Money.** Experience not necessary. If you are mechanically inclined come to Detroit now, to the Old Reliable "Michigan State."

## Learn Autos in Detroit The Heart of the Industry

Here you have wonderful advantages. Study autos, trucks, engines, auto electricity, tractors. All on best equipment, up-to-date. Many new cars including Packard "Straight Eight" with four wheel brakes, Buick Six (four wheel brakes), Oakland (four wheel brakes), new Oldsmobile, Hupp, Reo, Hudson, many others. Hundreds of engines and electrical systems. Expert instructors to teach you; a thorough course that slights nothing. Visit the great plants of Ford, Cadillac, Packard, Lincoln, Dodge, Hupp, Hudson, Studebaker, many others. These great companies approve this School. Get factory endorsed training at Detroit, the Auto Center. **Good Positions Open.** Here's your chance to be independent. The demand for trained auto men is greater than the supply. Opportunities everywhere. Be sure to write today for full information about Detroit training to make the most money.



**Michigan State Automobile School  
582 Auto Building, Detroit, Michigan**

### GET THE FACTS—TODAY!

**Michigan State Automobile School, 582 Auto Building, DETROIT, MICH.**

Send me FREE and without obligation complete information about Detroit-training to make the most money.

Name.....  
Street or R. F. D.....  
City..... State.....  
I am interested in ☐ Resident Course at your School.  
☐ Home Study Course.

## Money Making Opportunities

### AGENTS AND SALESMEN WANTED

**ONLY one sale a day means \$200 per month!** Five sales \$1,000 per month. Marvelous new adding machine. Retail \$15.00. Work equals \$350 machine. Adds, subtracts, multiplies, divides automatically. Speedy, accurate, durable, handsome. Five year guarantee. Offices, stores, factories, garages buy one to dozen. A fortune for live agents. Write quick for protected territory and free trial offer. **Lightning Calculator Co., Dept. P, Grand Rapids, Michigan.**

**SELL beautiful \$7.00 red and black over-sized hand made Fountain Pens for \$3.50.** Cost you \$1.75. With bonus \$1.55. Post card brings full details, or C. O. D. sample, at wholesale price. **Johnson Pen Co., 117 South First St., Rockford, Ill. Dept. C.**

**AGENTS—Write for free samples.** Sell Madison "Better-Made" Shirts for large Manufacturer direct to wearer. No capital or experience required. Many earn \$100 weekly and bonus. **Madison Mills, 564 Broadway, New York.**

**30% SELLING Lodge Emblems, Stationery.** Write, Wolf, Printer, Lawndale, Philadelphia.

**WANT Big Profits? Sell Our Repeaters!** Associated Laboratories. Muskegon, Michigan.

**GREATEST Sensation!** 11-piece toilet goods assortment selling like blazes at \$2.00 with \$1.25 Dressmaker's Shears Free to each customer. Winner for 15 years. **Davis Products Co., Dept. 57, Chicago.**

**CHEAPEST Mop-Scrubber made.** 100% profit. **Eastway Co., 405 St. Paul, Balto, Md.**

**START a business of your own.** Sell goods under your own private brand. Toilet articles, food products, household specialties. Tremendous profits. Big repeat business. We supply everything needed. Write for our attractive proposition. **National Scientific Laboratories, 224 Monroe, Richmond, Va.**

**\$10 DAILY silvering mirrors, plating and refinishing lamps, reflectors, autos, beds, chandeliers by new method.** Outfits furnished. **Write Gunmetal Co., Ave. F, Decatur, Illinois.**

**RESPONSIBLE representatives wanted for new, marvelous pocket cigar lighter.** Sells on moment's demonstration to consumers and dealers. Big profits and exclusive territory rights. Send for particulars and selling plans. Enclose 35c stamps for sample. **Master-lite Corp., 110 East 23rd St., New York.**

**AGENTS—Our new Fire Extinguisher sells for \$4.95 with big commissions.** Mechanically perfect—can't leak. Exclusive territory. Free outfit. **Write Nichols Co., Naperville, Illinois, Dept. F. 2.**

**NO Dull Times Selling Food.** People must eat. Federal distributors make big money; \$3,000 yearly and up. No capital or experience needed; guaranteed sales; unsold goods may be returned. Handsome \$15.00 sample case sent on trust. Free Samples to customers—Repeat orders sure; exclusive territory. Ask now! **Federal Pure Food Co., L2311 Archer, Chicago.**

**DISTRIBUTERS.** Wonderful pricing system for all stores. Absolute protection. Immediate sales. Tremendous Earnings! **Millen Mtg. Dept. J. E., 100 Boylston, Boston, Mass.**

**MANUFACTURE Potato Chips.** Big profits. Start in own kitchen. We furnish sacks. Formula, manufacturing instructions, sales plan. **D. Allen, 5945 Chicago Ave., Chicago.**

**\$5 TO \$15 daily easy—Your Pay in Advance—Introducing New Style Guaranteed Hosiery—Must wear or replaced free—No capital or experience required—Just show samples, write orders—We deliver and collect—Elegant outfit furnished—All colors—grades including silks, lises, chiffons—Maconee Textile Company, Station 1522, Cincinnati, Ohio.**

**SELL Mayneda pure rubber aprons.** Many styles. Dainty colors. Baby goods. Sanitary necessities. Big profit. **Mayneda Co., Dept. 137, 39 Murray St., New York.**

**AGENTS—I want hustling young men to take charge of my business in their home neighborhoods.** \$1.25 an hour for spare time. Permanent positions. Dignified work. No experience or capital required. Costs nothing to start—I furnish everything. Answer quick. **Harley Co., B-2021 Harley Bldg., Dayton, Ohio.**

**WASH clothes the new way.** Use the Torrent Automatic Washer. You will be delighted. Special offer to one in each locality. **Storm Royalty Co., 3614 Enright Ave., St. Louis, Mo.**

**LIGHTNING strange battery compound.** Charges discharged batteries instantly. Eliminates old method entirely. Gallon free to agents. **Lightning Co., St. Paul, Minn.**

**ARE you old at forty? See our advertisement on page 154 of this issue.** The Electro Thermal Company, 4042 Main St., Steubenville, Ohio.

**AGENTS—\$15 A Day.** Easy, Quick Sales. Free auto. Big weekly bonus. \$1.50 premium free to every customer. Simply show our beautiful, 7-piece, solid aluminum handle cutlery set. Appeals instantly. We deliver and collect. Pay daily. **New Era Mtg. Co., 803 Madison St., Dept. 41C, Chicago.**

**AGENTS Wanted to Advertise Our Goods and distribute samples given to consumers; 90c an hour; write for full particulars.** **American Products Co., 2338 American Bldg., Cincinnati, Ohio.**

**AGENTS Wanted—Something New—Fire fighter sells easily.** Makes a spectacular demonstration; car owners, homes, factories, stores, practically buy on sight. Our men make \$10.00 to \$50.00 a day. If you wish to establish a business of your own with unlimited possibilities for making big money, write us today. **Fyr-Fyter Co., 304 Fyr-Fyter Bldg., Dayton, Ohio.**

**BRING Home The Bacon—selling Stuart's Stain Remover.** Removes ink, iron rust, grass and fruit stains. Write for free samples and terms today. **C. H. Stuart & Co., 5958 Spring St., Newark, New York.**

**WONDERFUL invention eliminates needles for phonographs.** Preserves records. Abolishes scratching. Day's supply in pocket. \$20 daily. Sample on approval if requested. **Everplay, Desk 8-2, McClurg Bldg., Chicago.**

**HAVE you seen the New BeeGee Line—get our 1925 Catalogue and stop worrying about what to sell.** You'll be satisfied with what you make. **B. & G. Rubber Co., Dept. 709, Pittsburgh, Pa.**

**COMPLETE line Hosiery, Underwear and New Art Silk Lingerie year's greatest selling sensation.** Jacobs, Snider, others make \$150 a week. Free Samples to full or spare time workers. **Write Wearplus Co., Dept. 541, Bay City, Mich.**

**More Money Making Opportunities  
on pages 10 to 28**



## DIAMONDS-WATCHES

Sent for inspection without one penny down



No security required, no red tape; we trust you absolutely. Examine diamond at your leisure—wear it 30 days FREE. Send it back at our expense if not entirely satisfactory. You are not out a penny. Do not wait longer—a few cents a day will make you the owner of a sparkling, perfectly cut, blue-white diamond, set in 18 Karat Purity White Gold.

### New Low Prices and Terms None Can Beat

Why pay full price? Examine our diamonds. It costs nothing to see diamonds. After being thoroughly satisfied it's the biggest value for your money you ever saw, keep the ring and pay balance in small monthly payments.

Wear 30 Days FREE



This artistic, dependable Ladies' Wrist Watch fitted with genuine Illinois Springfield movements. A perfect time-piece. Beautiful 14 Karat white or green solid gold cases. Ask for New Watch Book showing cases in all the new shapes and designs. Watch sent on approval and sold on payments—\$3.50 a month.

FREE—Watch and Diamond catalog sent post-paid. Send for yours today.



### WEDDING RINGS

Beautiful hand engraved Purity White Gold Wedding Ring to match diamond rings. \$2.00 a Month

## Santa Fe Watch Co.

Sole Distributor of the Santa Fe Special Watch

**SANTA FE WATCH COMPANY,**  
260 Thomas Building, Topeka, Kan.

Please send prepaid and without obligation your Watch and Diamond Book Free, explaining your "No Money Down" Offer on Watches and Diamonds

Name.....

Address.....

State.....

## Big Value for 10 Cts.



6 Songs, words and music; 25 Pictures Pretty Girls; 40 Ways to Make Money; 1 Joke Book; 1 Book on Love; 1 Magic Book; 1 Book Letter Writing; 1 Dream Book and Fortune Teller; 1 Cook Book; 1 Base Ball Book, gives rules for games; 1 Toy Maker Book, Language of Flowers; 1 Morse Telegraph Alphabet; 12 Chemical Experiments; Magic Age Table; Great North Pole Game; 100 Conundrums; 3 Puzzles; 12 Games; 30 Verses for Autograph Albums. All the above by mail for 10 cts. and 2 cts. postage.

**ROYAL SALES CO., Desk 214, Norwalk, Conn.**

## EARN MONEY AT HOME

IN your spare time writing show cards. No canvassing or soliciting. We instruct you fully. Write today without obligation for full particulars and free booklet. **WEST-ANGUS SHOW CARD SERVICE LIMITED** Many satisfied pupils our best reference. 63 Colborne Building. Toronto, Can.



THE HOP-OFF  
Round - the - World  
Flyer leaving Clover  
Field, Santa Monica,  
Cal., on 20,000 mile  
trip.  
(Wide World Photo.)

# Daring Young Men Needed in Aviation

THERE is no field of work in the world today which offers such amazing opportunities to young men of daring and who love adventure, as does Aviation. Although still in its infancy, there is a crying demand in Aviation for young men with courage, nerve and self-reliance. For those who can qualify there will be thousands of highly paid jobs which will lead quickly and surely to advancement and success.

## Big Opportunities Await the Trained Man

Look over the fields of work which are open to the young man today. You will find that Aviation is the ONE FIELD that is not overcrowded—the ONE FIELD in which there is plenty of room at the top. Think of it! Only 21 years ago Orville and Wilbur Wright made the world's first airplane flight. Now airplanes fly around the world. Yes, Aviation offers the same wonderful opportunities today that the automobile and motion picture industries did 15 and 20 years ago. Men who got in on the ground floor of those industries made fortunes before others woke up. AVIATION IS NEW! It clamors for nifty young men—and the trained man has the world before him in Aviation.

## Easy to Become an Aviation Expert—\$50 to \$100 a Week

You can qualify now quickly for one of these exciting highly paid jobs through a new, sure, easy method of training. The study of Aviation is almost as interesting as the work itself. Every lesson is fascinating and packed full of interest. That's why Aviation is so easy to learn—you don't have to force yourself to study—once you start, you can't get enough of it. Only one hour of spare time a day will give you the basic training in an amazingly short time.

One student, S. F. McNaughton, Chicago, says:

"Your lessons are like a romance, and what is more, after one reading, the student gets a thorough understanding. One never tires of reading them." James Powers, Pa., another student says: "I am indeed surprised that such a valuable course can be had from such practical men for so little cost."

## Personal Instruction by Experienced Men

Men who have had actual experience in Aviation give you personal attention and guide you carefully through your training. They select the lessons, lectures, blueprints and bulletins. They tell you the things that are essential to your success. Every lesson is easy to read and quickly understood.

## Big Book on Aviation FREE



Send coupon below for New Free Book, just out, "Opportunities in the Airplane Industry." It is interesting and instructive and will show you many things about Aviation which you never knew before. Only a limited number offered—get yours, before the edition is exhausted.

**AMERICAN SCHOOL OF AVIATION**  
Dept. 1362, 3601 So. Michigan Ave., Chicago, Ill.

**AMERICAN SCHOOL OF AVIATION,**  
3601 So. Michigan Ave., Dept. 1362, Chicago, Ill.

Without any obligation, send me your Free Book, "Opportunities in the Airplane Industry," also information about your Course in Practical Aeronautics.

Name.....

Street.....

City..... State.....



## "THE SAWING QUARTETTE"



American  
Legion of  
Wisconsin  
—Paul  
Florine  
Post No. 166

# Play a Saw

With Our Free Course of Instruction You Can  
—Play in 3 Days—

We positively Guarantee that you can play our Musical Saw (using both bow and hammer) within three days by following our simple and easy Course of Instruction. The "Musical Saw" is the easiest to play musical instrument ever invented. No knowledge of music or note reading required.

If you have heard our Musical Saw in Vanderbille, over the Radio or from Victor Record 18767, Columbia Record 3757 or Vocalion Record 14766, you are familiar with the soft, mellow tones produced from our musical saws.

The "novelty" of producing such beautiful music from "a saw" makes this instrument "THE HIT" on any program entertainment.

Start A Saw Quartette in your Lodge, Legion Post or Club. A novelty organization of this kind will be the talk of the town. Put "pep" into your meetings, make it a feature advertising card at your entertainments, parties, etc.

## Send No Money

Simply fill out the coupon and mail today. We send you the special tempered, tenor (solo) Musical Saw, Soft Hammer and complete Course of Instruction U.O.D. \$4.85 plus the postage. Try out the instrument for three days. If not satisfied with the tone or its easiness to play, return and we will refund your money. No strings to this offer, YOU ARE THE SOLE JUDGE. You will be the one to furnish the big surprise at your next Club or Lodge meeting. Then, start a Sawing Trio or Quartette. Complete information on this subject will be mailed to you with the instrument.

MUSSEHL & WESTPHAL  
FT. ATKINSON, WISCONSIN

Start a  
Saw Club  
in Your  
Town

Now  
Only

\$4<sup>85</sup>

Name.....

Address.....

The cost of our special "Saw Bow" is \$2.25 extra, check here if you wish Bow sent with instrument.

Musseh & Westphal  
717 W. Water St.  
Ft. Atkinson, Wis.

You may send me the Musical Saw, Soft Hammer and Free Course of Instruction. I will deposit with postman \$4.85 plus postage. If not entirely satisfied I will return the shipment within three days and you will refund my money.

**\$25.00 in PRIZES** See top page 10 in front of book for details

## DRAW CARTOONS

TURN YOUR TALENT INTO MONEY

Cartoonists earn from \$50 to \$300 per week—some even more. Our new Circle System of Drawing, quickly prepares you to become a cartoonist. Send 6c in stamps for free booklet and complete information. Write today.

THE NATIONAL SCHOOL OF CARTOONING  
415 Park Building Cleveland, Ohio

## FREE LESSONS EXPERT AUTO REPAIRING

Earn \$25 to \$60 a week

Boys, men—16 or over,  
should mail coupon  
AT  
ONCE

FRANKLIN INSTITUTE

Dept. T-127, Rochester, N. Y.

Kindly send me absolutely free

sample lessons in Expert Automobile

Repairing

Name.....

Address.....

## SIGNS, BANNERS, CARDS



Easily Painted with the aid of

Letter Patterns.

Simply trace around a letter pattern and fill in. Made in a large variety of

styles and sizes at surprisingly reasonable

prices. Send stamp for free samples. John

F. Rahn, D2433 Green View Av., Chicago

## MAKE MONEY SELL MADISON SHIRTS

Direct from our factory to wearer.

Easily sold. Over one million satisfied wearers. No capital or experience

required. Large steady income. Many earn

\$100. to \$150. weekly. Territory now being

allotted. Write For Free Samples.

MADISON SHIRT M'FRS, 505 Broadway, New York

## AMBASSADOR Low Loss Products



Master Tuning Coil  
Perfectly Balanced Head Phone  
Low Loss Condenser

High grade, standard radio products that will increase the efficiency of any set and add to the satisfaction of the user. Ambassador Low Loss Products have long been the choice of particular fans. See them—compare them, and you will choose them too.

At all good dealers  
Write for FREE circuit diagrams in which Ambassador products can be used.

AMBASSADOR SALES COMPANY  
108 Greenwich St., New York  
426 W. Madison St., Chicago

## \$67.50 IN ONE DAY



L. J. Clement made that in a small New Hampshire town. Butters made \$592 in one month. McPhail \$1,140.10 in four months. Others are making even more.

The new Weldon Fire Gun sells on sight because of its amazing new features. Shoot chemical 25 feet without pumping. Low in price. Every farm home, factory, garage, store a prospect. One demonstration often sells a dozen—your profit \$50 or more. I teach you how to demonstrate—give you a free selling outfit, and a course in salesmanship. Big money in full or spare time. Write quick for full details.

WELDON MANUFACTURING COMPANY  
Dept. 62 Grand Rapids, Michigan



## Money Making Opportunities

### AGENTS AND SALESMEN WANTED

**\$10 A DAY** easily earned taking orders for our big line quality soaps, perfumes, toilet goods, extracts, spices, foods, towels, jewelry, remedies, novelty-needle books, rubber goods, etc. Men and women write for big offer. Catalogs free. Western Products Co., Dept. 143, 606 N. Oakley, Chicago.

**RADIO Set Builders**—We want a representative who knows radio to handle standard, well advertised sets and parts in your locality. Liberal offer to right party. Write for plan and Free Outfit. Waveland Radio Company, Inc., Div. 32, 1027 N. State St., Chicago, Ill.

**\$100 WEEKLY**—Pleasant work: Appointing local agents to introduce Mother Hubbard Foods: no canvassing; no delivering; no money invested. Adam Inthout, 556 Congress, Chicago.

**EARN money at home.** Addressing, mailing circulars. Experience unnecessary. No selling. We pay weekly. York Supply Co., Dept. 119, 309 Fifth Ave., New York.

**FORMULAS, Processes, Trade-Secrets.** Different, Dependable, Guaranteed. Catalog Free. C. Thaxly Co., Washington, D. C.

**SELL Books by Mail.** Use our money making circulars at one-fourth cost; enormous profits on sales; particulars free. G. Elfeo, 525 South Dearborn, Chicago.

**WANTED:** District salesman for large mfg. selling union made, hand tailored all wool suits for \$23.50. Prefer married man with sales experience, who has lived at least 5 years in his territory. Apply A. H. Harvey, Mfg., Box 60, Chicago.

**YOUR spare time.** What do you do with it? Has it ever occurred to you to put it to use? Do you know that you can earn from \$3.00 to \$5.00 an hour and more for every spare hour you put to work? Let us show you how. It will cost you but a penny and a minute of your time. Your name and address on a postcard will bring you the facts. Write for them today. Address Dept. 240, William C. Bartlett, Inc., 850 West Adams Street, Chicago.

**AGENTS** handling Li La Fleur Perfume Tablets are reaping immense profits, costing six cents and selling for twenty-five. Sales repeated promptly, with a permanent clientele. Do not miss this wonderful opportunity. Great for lady agents. Free terms. Sample ten cents. Triumph Mfg. Co., Fox Chase, P. O., Philadelphia, Pa.

**LIVE wire salesmen** to join our prosperous sales force. Earn \$75 to \$125 weekly from the start—selling the biggest and fastest selling tailoring line. Set your own profit on each sale. 300 all-wool fabrics retailing from \$22.50 to \$45.00. Satisfaction guaranteed. Experience helpful but not necessary—we teach you. Write for big line today. Ambitious men can become District Managers. Address Sales Manager M. A. Wells, Box 483 Chicago, Illinois.

**AGENTS:** Sell two shirts for price of one. Walton Duplex shirts are reversible. Make \$15-\$25 daily. We deliver, collect. Write for "Your Opportunity." Walton-Duplex Co., 123 Brooks Bldg., Chicago.

### HELP WANTED

**MR. BRUSH Salesmen:**—Old Established New York Brush Manufacturer requires the services of men in all territories to sell their extensive line of Sanitary Twisted in Wire Brushes. We pay larger commissions than any other Brush House in the country. Write immediately for proposition. Wire Grip Sanitary Brush Corp., 15 Mercer St., New York.

**EMPLOYMENT** in South America. We furnish classified addresses of 388 employers in Peru, Bolivia and Argentina for \$1. South America Information Bureau, Portland, Ore.

**EARN \$1.20 an hour** cutting blanks at home; spare time. Men only. Send addressed reply envelope. Good-year Sm., 147 W. 23rd St., New York.

**WANTED**—Representatives in every factory in the United States. Popular Science Monthly, 250 Fourth Ave., New York.

**MEN** to build radio sets in spare time. Leon Lambert, 555-D Kaufman Bldg., Wichita, Kansas.

**SILVERING Mirrors, French plate.** Easily learned; immense profits. Plans free. Wear Mirror Works, Excelsior Springs, Mo.

**OUR genuine gold window sign letters** are an excellent money-making proposition for handy men. Slann Sign System, East Bethune Avenue, Detroit, Michigan.

**MAKE money silvering mirrors, autolights, radiators, tableware.** Outfits. Methods free. Sprinkle, Plater, 98 Marion, Indiana.

**EARN \$10.00 to \$35.00 weekly** mailing circulars at home. Outfit and instructions 25 cents. Jamorris, 2305 Gratz, Philadelphia, Pa.

**MEN** wanting forest ranger, postal clerk and other government positions; particulars free. Write Mokane, Dept. A-30, Denver, Colo.

### HELP WANTED—INSTRUCTION

**GET a United States Government position.** Good pay, short hours, vacation, sick leave, pension, etc. Prepare for Railway Mail, Post Office, Custom House, Internal Revenue, Rural Carrier or other branches. Examinations all the time. Common education sufficient. Let our expert (Former U. S. Civil Service Secretary-Examiner) train you. Guaranteed preparation. Write today for Free Booklet, describing these positions and our Money-Back Guarantee. Patterson Civil Service School, Dept. 162, Rochester, N. Y.

**\$133.00-\$192.00 month.** Government Railway Postal Clerks. Men, 18 up. Steady. Common education sufficient. Candidates coached. Particulars free. Write immediately. Franklin Institute, Dept. W 39, Rochester, N. Y.

**RAILWAY mail clerks, \$133-\$192 monthly.** Many other openings, \$117-\$250 per month. Information free. Write immediately. Chicago Civil Service College, T-70, Keener Building, Chicago.

**BE a detective.** Excellent opportunity to earn big money, travel, thousands of dollars offered in rewards. Established 1909. Particulars free. Write to C. T. Ludwig, 424 Westover Bldg., Kansas City, Mo.

**ALL men, women, boys, girls, 17 to 65,** willing to accept Government Positions, \$117-\$250, traveling or stationary, write Mr. Oment, 295, St. Louis, Mo., immediately.

**FIREMEN, Brakemen, Baggagemen, Sleeping Car Train Porters (colored), \$140-\$200.** Experience unnecessary. 838 Railway Bureau, East St. Louis, Ill.

**More Money Making Opportunities**  
on pages 10 to 28





Everybody likes good music. Nearly everybody would like to play a musical instrument. And very soon everybody will be playing one, for anybody can play a Hohner Harmonica.

Twelve million music lovers, young and old, have learned to call the Hohner Harmonica "That Musical Pal of Mine." They know that there's nothing like good music for happiness, and nothing like a Hohner for good music.

Don't hum—play it on a Hohner. Get one today—50¢ up—and ask for the Free Instruction Book. If your dealer is out of copies, write M. Hohner, Inc., Dept. 182, New York City.

If you want a musical treat ask to hear Victor Record 19421, by Borrah Minevitch.



**Meyer Both Company** the largest Commercial Art Organization in the World offers you a practical training, based upon twenty-five years of success. This nationally known organization each year produces and sells to advertisers over 15,000 commercial drawings. This well paid profession equally open to men and women. Home study instruction.

#### Get Facts Before You Enroll in Any School

Ask the Advertising Manager of the leading newspapers in your city, about Meyer Both Company—let them tell you about us. Send four cents in stamps for illustrated book telling of the success of our students.

#### MEYER BOTH COMPANY

Michigan Ave. at 28th St., Dept. 35  
CHICAGO, ILL.

Note—To Art and Engraving Firms: Secure artists among our graduates. Write us.

Send for



CUT  
THIS  
OUT

# This Year, Thousands of Men Will Succeed in Drafting

## —Will You Be One of Them?

### FREE Trial Lesson Points the Way

TEN months from today you can be an expert draftsman. If you are making less than \$200 per month with limited prospect for advancement . . . these facts are addressed to you.

More than 50,000 draftsmen are needed every year. That is what makes drafting . . . when the man is properly trained . . . one of the surest and shortest roads to increased income. In a letter to Mr. Charles W. Morey, President of the Chicago Technical College, Mr. George W. Hand, Assistant to the President of the Chicago and Northwestern Railway, writes:

"Good draftsmen are hard to find and they experience no difficulty in obtaining remunerative employment."

**Short Home-Study Course** We have been teaching drafting for 21 years. Our instructors are practical engineers. They train you with practical jobs. Rates are low . . . payments easy. When you enroll, we include a \$25 "lifetime" drawing outfit.

**The Trial Lesson Idea** We send you without obligation a trial lesson in drafting. We want you to see what drafting is like . . . we want you to know our method of teaching by mail. Our course has been simplified and perfected through 21 years of teaching experience but we want you to judge for yourself whether you will like this fascinating, well-paid work.

**40-page Book, free!** We send you also a book of interesting facts on the field of drafting. This book gives you in complete outline our courses in structural, architectural, electrical and machine drafting. It introduces you to our instructors; tells you what prominent men say about drafting . . . where draftsmen are employed . . . and at what salaries . . . what a draftsman's opportunities are . . . it tells you how . . . and why . . . many of our students have increased their salaries even before finishing their courses.

Most men at the top in engineering started as draftsmen. Many of our students who learn drafting in spare time through Home-Study come to Chicago and secure positions at greatly increased salaries as draftsmen in engineering, construction, railroad, architectural firms, etc. Then . . . evenings in the college classroom . . . they continue their study of engineering or architecture. Many of them rise quickly to positions paying \$300, \$350, \$400 per month. Many enter their own business. Others become chief draftsmen and executives. The field of progress opened up to them in this way is really limitless.

### Send Coupon Today

Thousands of men will succeed in drafting this year. Will you be one of them?



### How big a field is DRAFTING?

A structure like the Temple Building, recently completed in Chicago, requires approximately 3000 mechanical drawings to guide its builders. Every floor, every girder, every stone must first be "laid out on paper." Every cottage and every skyscraper must be drawn . . . mechanically and to scale . . . before the builder can interpret the ideas of the architect . . . every country highway and city street, every engine and machine . . . wherever anything is built, there the draftsman is essential.

Send the Coupon

## Chicago TECHNICAL College

Chicago Tech Building, Dept. 231-B, 118 East 26th Street, Chicago

Chicago Technical College,  
Dept. 231-B, 118 East 26th Street,  
Chicago, Ill.  
Gentlemen: Send me, without cost  
or obligation, your Trial Lesson  
and your 40-page Booklet of Facts  
About Drafting.

TRIAL  
LESSON  
**FREE**

Name . . . . .  
Address . . . . .  
City . . . . .  
State . . . . .

### Drafting Engineering and Architecture

Chicago Technical College, founded in 1904, enrolls over 1000 men each year in resident day and evening courses.

Diplomas in engineering and architecture are granted at the end of two years. The Degree of B. S. is conferred at the end of three years in the day course. Short courses, also, in Drafting, Plan Reading, Estimating, etc.

From this famous College of Engineering come these Home-Study courses in Drafting.

### Opportunities in Chicago

For those who can come to Chicago, there is a splendid opportunity to learn drafting while earning expenses in part-time positions. If interested, write for 52-page Blue Book.



# Be a Dental Laboratory EXPERT



## \$65 to \$125 a Week

You can learn every branch of Dental Laboratory work in a few months at my schools! Growing, uncrowded field. Big demand from 60,000 Dentists for experts capable of making Plates, Crowns, Bridges, etc. You learn here by doing actual Dental Laboratory jobs for practicing, ethical Dentists, on standard materials with standard tools. NO CLASSES. Individual, personal instruction only.

## Opportunities Without Limit

**Jobs** The positions and opportunities look for you when you are expert in every branch of this fascinating, easy work. The demand for experts from Dentists and laboratories is greater than the supply and the pay is high.

**Laboratories** When you are McCarrie trained you need little cash capital to open your own laboratory. Hundreds of fine locations open, good for profits of \$3000 to \$6000 a year. My training is quickest road to a business of your own.

## Read My FREE Offers

To encourage ambitious men and women to go into Dental Laboratory work, I will pay your railroad fare to Chicago or Detroit, and give you a laboratory outfit of new tools and instruments without charge, providing you mail coupon or write me at once. Here is the opportunity you have been waiting for to get into easier, better-paying work. Coupon brings free book, free offers and complete information.

**H. A. McCARRIE, Director**  
McCarrie Schools of Mechanical Dentistry

1338 S. Michigan Ave.  
Dept. 1102B Chicago  
Branch at Detroit, Mich.

**Mail Coupon Today!**



**H. A. McCARRIE, Director**  
McCarrie Schools of Mechanical Dentistry, 1338 S. Michigan Ave., Dept. 1102B, Chicago

Please rush free offers and catalog and complete information about the Dental Laboratory business.

Name.....

St. No.....

City..... State.....

## Money Making Opportunities

### BUSINESS OPPORTUNITIES

WE start you in business, furnishing everything; men and women, \$80.00 to \$100.00 weekly operating our "New System Specialty Candy Factories" anywhere. Opportunity lifetime; booklet free. W. Hillyer Ragsdale, Drawer 19, East Orange, N. J.

STOP plodding! Be successful. Operate a tire repair shop. Make big profits in any locality. We teach you and furnish complete equipments, \$100 up. Book of Opportunity free. Haywood's, 1306 South Oakley Avenue, Chicago.

LEARN the collection business. Good income; quick results. Interesting booklet, "Skillful Collecting," free. National Collector's Association, Science Building, Newark, Ohio.

MEN, to sell regular \$1.00 and \$1.50 silk and knitted ties for 35c and 50c. Make \$15.00 daily. Write for particulars. American Cravat Exchange, 621 Broadway, New York.

BECOME a Foot Correctionist. A New Profession not medical nor chiropody. All the trade you can attend to; many are making \$3000 to \$10,000 yearly, easy terms for training by mail, no further capital needed or goods to buy, no agency or soliciting. Address Stephenson Laboratory, 10 Back Bay, Boston, Mass.

GOLD, Silver, and colored Sign Letters for windows, automobiles, trucks. Make them yourself with our Process and Letter Patterns. Fast sellers. Big profits. No experience. Stamp brings actual sample. Wilterding, 1144 Pleasant Street, Oak Park, Illinois.

GET money in your mail. "Lambert's Mail Order Secrets" contains successful methods never before published. Particulars free. Leon Lambert, 555-D Kaufman Bldg., Wichita, Kansas.

INCH Display Advertisement, 166 Magazines, Year, \$50. Wood's Popular Services, Atlantic City.

ARTIFICIAL Marble sanitary flooring instructions, ornamental casting, concrete, plaster, papier-mache decorations, garden furniture, statuary, rubber-moulds, 15 years instructing the public, particulars and 200 illustrations free. Chris Mahler, Huntington, N. Y.

EVERYBODY needs and buys the "Business Guide." Wells cleared \$1,150 in 35 days. Send for sample. It's Free. Nichols Co., Dept. 1B, Naperville, Ill.

USED Correspondence courses of all schools sold, rented and exchanged. List free. (Courses bought.) Lee Mountain, East Chattanooga, Tenn.

SCHEMER MONTHLY, Alliance, Ohio, teaches mail order business and prints big profit schemes; one subscriber making \$25,000 from three; another \$10,000 from one. Try your luck. Year, 12 copies, 384 pages, only \$1.00; three months, 30c.

MAKE money with your camera. Lancaster, Box 436, Los Angeles.

THE Great Wheat Secret. New book showing the cause of wheat swings and how to forecast them. Unequaled method for traders, speculators, millers. Eye-opening folder free; write today. Market Forecaster Co., Dept. B, 1016 Baltimore Ave., Kansas City, Mo.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Address your inquiry to: Manager, Classified Advertising, Popular Science Monthly, 250 Fourth Ave., New York.

A BUSINESS of Your Own—Make and Sell Chipped Glass Name and Number Plates. Checkersboards, Signs. Large Booklet Free. E. Palmer, 513, Wooster, Ohio.

FREE plan—Sell books and novelties by mail. Harvey Teeple, Decatur, Indiana.

FREE instruction book. Start Mail Order Business home evenings. Pier, 791 Cortlandt St., N. Y.

START a paying business at home or small office anywhere. Soliciting unnecessary. \$50.00 weekly easy. Begin in spare time. Free Folder. Downs Co., 2326 Myrtle, St. Paul, Minn.

SPECIAL free offer—100,000,000,000 German Marks, 5,000 Polish marks, and 10 Russian Czar Pre-War roubles absolutely free with every 25c order for 100 Kronen Hungarian Government 5 1/2% bonds, interest coupons attached. Send 25c order today and receive latest Quotations. Public State Bank, Dept. 609A, Chicago.

START mail order business at home. Write today, particulars free. National Service, 577 Ivy St., San Francisco, Calif.

BE your own boss: \$100 sufficient. Handle your own cash. Dept. R. Paul Kaye, 149 Broadway, N. Y.

I MADE \$100,000 as real estate specialist. Free booklet tells how. American Business Builders, Inc., Dept. AA-342, 1133 Broadway, New York.

RECEIVE money in your mail. "Mongers Mail Order Secrets." Successful methods yet unpublished. Particulars Free. O. L. Monger, 1380 1/2 N. Main St., Dayton, Ohio.

PATENTS Procured; Trade Marks Registered.—A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard B. Owen, 44 Owen Bldg., Washington, D. C., or 2276-Z Woolworth Bldg., New York.

FORMULAS, Processes, Trade-Secrets. Different, Dependable, Guaranteed. Catalog Free. C. Thaxly Co., Washington, D. C.

100,000 MARK German Government Bond, \$1.00-10,000 Austrian Kronen 35c. Write for competition defying dealer terms. Arrow Sales, Dept. 88-A, 1748 No-Park Ave., Chicago.

\$10,000 YEARLY Guaranteed, doing professional work you'll like. Leaders, 159 N. State, Suite 1106 Chicago.

ARE you old at forty? See our advertisement on page 154 of this issue. The Electro Thermal Company, 4042 Main, Steubenville, Ohio.

A NEW MAIL ORDER BOOK tells exactly how to start, grow and win. Latest methods explained, new ideas, up-to-date pointers. Free circular tells all about it. Be first! Marion MacRae, Publisher, 625-S, Washington St., Portland, Oregon.

### HOUSEHOLD

WRITE for a copy of our "Quick-Action Advertising Rate Folder"—It contains information of real value to you. Popular Science Monthly, 250 Fourth Ave., N. Y.

**More Money Making Opportunities**  
on pages 10 to 28

## I Teach By Mail

I can make a good penman of you at your home during spare time, no matter where you live or how poorly you now write. My simplified system has shown thousands the way to good penmanship during the past twenty-five years—it CAN and WILL do the same for YOU—

"My beautifully Illustrated 32-page Book

**"How to Become a Good Penman" FREE!!**

It contains many beautiful specimens of penmanship showing what others have accomplished by the Tamblin System, with testimonials and general information about our course—(Your name elegantly written on a card if you enclose stamp for postage). Ladies taught as successfully as men. WRITE TODAY, address

**F. W. TAMBLIN**  
437 Ridge Bldg., Kansas City, Mo., U. S. A.

## Electricity

### A Practical Training

In this great profession will make your successful future a certainty.

The School of Engineering of Milwaukee has specialized for 20 years in training young men for

## Electrical Engineering

With a B. S. Degree in 3 Years.

Institute of Electrotechnics—12 months to 30 months, depending upon previous education. Graduates are technically trained electrical experts. Commercial Electrical Engineering—1 year for high school graduates. Automotive Electricity—3 to 6 months. Automotive Electrical Engineering—1 year. Radio Sales and Service—3 mos. Armature Winding—and Motor Generator Repair—thorough 3 months' course. Practical Electricity—6 to 12 months' course to become a Master Electrician.

We will Aid You Earn Your Way Partly Through College, through our practical plan of co-operative industrial employment. Board and room at cost. Student activities, orchestra, daily broadcasting WSOE. New Term Opens Every 6 Weeks. Write today for latest catalog and full details. Mention *ps*—education and course of interest.

**SCHOOL of ENGINEERING**  
of Milwaukee  
PSM-2-25, 415 Marshall St., Milwaukee, Wisconsin

## Learn Photography at HOME

**Make \$75.00 a Week on the Side**

Establish yourself as a Photographer

Expert quickly—during your spare time—under a leading photographer. I'll show you how to start your own business—or command a large salary. Send for my unusual offer—it's only temporary. Act at once. A postal will do.

International Studios, Inc., Dept. 1102  
2601 Michigan / ve., Chicago, U. S. A.

## Anyone CAN LEARN!

No talent or experience necessary. Fascinating work. Pays big money. Complete instruction book TELLS ABOUT: Alphabets, Colors, HOW TO MIX PAINTS, Show Cards, Window Board and Wall Signs, Ready made letters, Glazing, TRICKS OF THE TRADE, also gives 100 Alphabets and Designs. Book bound in flexible art. leather, gold edges, and four ball bearing Show Card Pens. Book and Pens sent postpaid for \$3.00. (C. O. D. 10c extra.)

Ogilvie Pub. Co., 57 Rose St., Dept. 72, New York

**EARN MONEY IMMEDIATELY—**  
**WE FURNISH EQUIPMENT TO START**

## FREE \$20 Musical Instruments

**Fine Tone**

We have a wonderful new copyrighted system of teaching note music by mail. To first pupils in each locality we will give free a \$20 superb Violin, Tenor Banjo, Ukulele, Hawaiian-Guitar, Banjo, Mandolin, Banjo-Ukulele, Banjo-Mandolin, Cornet or Banjo-Guitar absolutely free. Also teach Piano and Organ. Very small charge for lessons only. Four lessons will teach you several pieces. Over 100,000 successful players. We guarantee success or no charge. Complete outfit free. Write today, Dept. 100. No obligation.

Slingerland School of Music, 1815 Orchard St., Chicago, Ill.





## LEARN BY DOING

Every phase of all  
branches

## ELECTRICITY

taught by

**Actual Practice**  
In America's foremost and  
oldest institution for trade  
training

**No Books Used**  
Individual Instruction  
Start Any Day

Write for FREE 64-page catalog

**THE NEW YORK  
ELECTRICAL SCHOOL**

40 West 17th St., New York City

# Deafness



Perfect hearing is now being re-  
stored in every condition of deaf-  
ness or defective hearing from  
causes such as Catarrhal Deaf-  
ness, Relaxed or Sunken Drums,  
Thickened Drums, Roaring and  
Hissing Sounds, Perforated,  
Wholly or Partially Destroyed  
Drums, Discharge from Ears, etc.

### Wilson Common-Sense Ear Drums

"Little Wireless Phones for the Ears" require no  
medicine but effectively replace what is lacking or  
defective in the natural ear drums. They are simple  
devices, which the wearer easily fits into the ears  
where they are invisible. Soft, safe and comfortable.

Write today for our 168 page FREE book on DEAF-  
NESS, giving you full particulars and testimonials.

**WILSON EAR DRUM CO., Incorporated**  
635 Inter-Southern Bldg. LOUISVILLE, KY.



## ZIP-ZIP

THOUSANDS of boys are  
made happy with this won-  
derful Zip-Zip shooter, something  
every boy wants and never gets  
tired of. Zip-Zip shooter is scientifically  
and practically made; boys, if you like hunt-  
ing and outdoor sports, get a Zip-Zip shooter  
with plenty of pep and force and learn that  
quick and sure aim. If  
your dealer happens not  
to have them, order  
from us. Zip-Zip shooter  
complete 35c or three  
for \$1.00; send stamps,  
coin or money order.



AUTOMATIC RUBBER CO., Dept. 22, COLUMBIA, S. C.

## Wanted Men and Women to Learn Photography!


Photographers and Photo-Engravers earn \$200 to \$500 a  
month. The field is uncrowded. Learn these profitable  
and fascinating professions. Taught by largest and best  
college of its kind in the world. Established over 30 years.  
Demand for our graduates far exceeds supply. Good  
positions secured. Tuition and living expenses low.

**Get this FREE Book!** Write today for free  
beautifully illustrated  
book describing wonderful opportunities in this field.

Illinois College of Photography, Box 325, Effingham, Ill.

## "STAMMERING Its Cause and Cure"

You can be quickly cured if you stammer. Send 10 cents, coin  
or stamps, for 288 page cloth bound book on Stammering and  
Stuttering. It tells how I cured myself after Stammering and  
Stuttering for 20 years. **BENJAMIN N. BOGUE**  
7514 Bogue Building, 1147 N. W. St. Indianapolis



## Stop Forgetting

Make Your Mind an index  
from which you select facts,  
figures, names, faces. De-  
velop concentration, self-  
control; overcome busi-  
ness, forgetfulness. Write  
today for FREE memory and  
concentration test and illus-  
trated booklet, "How to  
Remember."

**PROF. HENRY DICKSON**  
Dept. 929, Evanston, Ill.



# KEY to a PRACTICAL UNDERSTANDING of ELECTRICITY



**Free Examination**  
Price Complete, \$4,  
Payable \$1 Monthly

## AUDELS HANDY BOOK

### INFORMATION

On every electrical subject  
arranged in **HANDY**  
**FORM** under these  
headings:—

Electro-Therapeutics  
Electric Shocks  
X-Rays  
Welding  
Brazing  
Soldering  
Heating  
Motion Pictures  
RADIO  
Radio Hook-ups  
Telephone  
Telegraph  
Electric Bells  
Crane  
Elevators  
Pumps  
Electric Shio Drive  
Electric Railways  
Electric Vehicles  
Automobile Starting  
and Lighting System  
Ignition  
Generation and  
Transmission  
Electric Tools  
Plant Management  
Power Station Plans  
ARMATURE WINDING  
Armature Repairing  
A. C. Motors  
Alternator Construction  
Alternators  
D. C. Motors  
Dynamos  
Magnetic Induction  
WIRING  
Wiring Diagrams  
Electric Lighting  
Sign Flashers  
Cable Splicing  
Power Wiring  
Underground Wiring  
Outside Wiring  
Wiring Finished  
Buildings  
Tests  
A. C. Apparatus  
(Switch Devices)  
(Current Limiting)  
(Lightning Protec-  
tion)  
Rectifiers  
Converters  
Transformers  
Power Factor  
Alternating Currents  
D. C. Apparatus  
(Switches)  
(Fuses)  
(Circuit Breakers)  
(Rheostats)  
(Watt Hour Rules)  
Electro Plating  
Electrolysis  
Storage Batteries  
Magnetism  
Electrical Energy  
Conductors  
Insulators  
Static Electricity  
Dynamic Electricity  
Magnetic Electricity  
Radio Electricity  
Recent Applications  
Ready Reference  
Index on all subjects.

### FREE EXAM- INATION!

You take no risk.  
The book is its  
own salesman

**FOUR DOLLARS COMPLETE**  
**\$4** 1040 PAGES **\$1**  
2600 ILLUSTRATIONS **PER**  
LEATHER BOUND-POCKET SIZE **MO.**

Here is an up-to-date, quick Ready Reference. It gives com-  
plete instruction and inside information on every electrical  
subject. Every point clearly explained in plain language and  
diagrams that are easily understood. Handy to use. Easy to  
learn from. Subjects arranged in progressive manner for the  
student and with complete index which gives information  
instantly to professional workers. A time saver, money saver,  
and a helping hand for Engineers, Professional Electricians,  
Students and all interested in electrical work.

## Audels Handy Book of Electricity

Audels Handy Book contains important and valuable wiring  
diagrams and calculations, machine sketches; instructions and  
helps on operation, maintenance and repair; outlines showing  
the entire theory and all modern, practical applications of  
electricity; and a big lot of good and useful RADIO information  
and diagrams. The use of Audels Handy Book of Practical  
Electricity will make you familiar with many time-saving, short  
cut, profitable suggestions. A practical daily helper, covering  
the entire field, for both student and professional worker.

### Free Examination

### Handsomely Bound in Flexible Red Leather

For the past 40 years we  
have rendered a special-  
ized educational book ser-  
vice. We accept payment  
for our books only after  
examination has proven to  
the purchaser that the  
books are worth the money.  
Use this valuable coupon  
now to take advantage of  
our free offer in securing  
AUDELS Handy Book of  
Practical Electricity.

Audels Handy Book is a magnificent volume  
that you will be proud to own and carry with  
you. Gilt Edged. Durable real leather  
binding. 1040 pages of strong white paper.  
Large Type. 2600 illustrations and diagrams.  
A mine of information and a most unusual  
value at only \$4.  
Send no money. Pay nothing to postman.  
Examine book absolutely free. No obligation  
to buy unless satisfied. If you want to keep  
the Handy Book, send \$1 within 7 days and  
\$1 monthly until \$4 is paid.

### FREE EXAMINATION COUPON

**Theo. Audel & Co., 65 West 23rd St., New York**

Please send me AUDELS HANDY BOOK OF  
PRACTICAL ELECTRICITY for free examination.  
If satisfactory, I will send you \$1 in 7 days, then \$1  
monthly until \$4 is paid.

Name.....

Address.....

Occupation.....

Employed by.....2 T 34





## "Real Money in the Bank"

"Think of it, Nell—\$460! And to think that just a few months ago we couldn't save a cent."

"Remember the night we talked it over and you persuaded me to send in that I. C. S. coupon? It was the best investment we ever made."

"The boss says if I keep on showing the same interest in my work there will be a still better position open for me soon. It certainly does pay to study in spare time."

Thousands of men now know the joy of happy, prosperous homes because they let the International Correspondence Schools prepare them in spare time for bigger work.

One hour after supper each night, spent with the I. C. S. in the quiet of your home, will prepare you for the position you want in the work you like best.

This is all we ask: Without cost or obligation, put it up to us to prove how we can help you.

**Mail the Coupon Today!**

### INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 7638-D, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

#### BUSINESS TRAINING COURSES

- |   |   |
|---|---|
| <input type="checkbox"/> Business Management            | <input type="checkbox"/> Salesmanship           |
| <input type="checkbox"/> Industrial Management          | <input type="checkbox"/> Advertising            |
| <input type="checkbox"/> Personnel Organization         | <input type="checkbox"/> Better Letters         |
| <input type="checkbox"/> Traffic Management             | <input type="checkbox"/> Show Card Lettering    |
| <input type="checkbox"/> Business Law                   | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law        | <input type="checkbox"/> Business English       |
| <input type="checkbox"/> Accountancy (including C.P.A.) | <input type="checkbox"/> Civil Service          |
| <input type="checkbox"/> Nicholson Cost Accounting      | <input type="checkbox"/> Railway Mail Clerk     |
| <input type="checkbox"/> Bookkeeping                    | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary              | <input type="checkbox"/> High School Subjects   |
| <input type="checkbox"/> Spanish                        | <input type="checkbox"/> French                 |
|   | <input type="checkbox"/> Illustrating           |

#### TECHNICAL AND INDUSTRIAL COURSES

- |   |  |
|---|--|
| <input type="checkbox"/> Electrical Engineering | <input type="checkbox"/> Architect               |
| <input type="checkbox"/> Electric Lighting      | <input type="checkbox"/> Architects' Blue Prints |
| <input type="checkbox"/> Mechanical Engineering | <input type="checkbox"/> Contractor and Builder  |
| <input type="checkbox"/> Mechanical Draftsman   | <input type="checkbox"/> Architectural Draftsman |
| <input type="checkbox"/> Machine Shop Practice  | <input type="checkbox"/> Concrete Builder        |
| <input type="checkbox"/> Railroad Positions     | <input type="checkbox"/> Structural Engineer     |
| <input type="checkbox"/> Gas Engine Operating   | <input type="checkbox"/> Chemistry               |
| <input type="checkbox"/> Civil Engineer         | <input type="checkbox"/> Pharmacy                |
| <input type="checkbox"/> Surveying and Mapping  | <input type="checkbox"/> Automobile Work         |
| <input type="checkbox"/> Metallurgy             | <input type="checkbox"/> Airplane Engines        |
| <input type="checkbox"/> Steam Engineering      | <input type="checkbox"/> Agriculture and Poultry |
|   | <input type="checkbox"/> Mathematics             |

Name.....  
Street.....  
Address.....

City..... State.....

Occupation.....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada

## Money Making Opportunities

### STAMPS AND COINS

NYASSA Giraffes and packet of 52 different scarce stamps, Fiume Triangle, large \$1.00 U. S. Rev., Millimetre scale, perforation gauge and ruler for only 9c. To introduce our Sudden Service approvals, Fennell Stamp Company, Dept. C, Fullerton Bldg., St. Louis, Mo.

FAMOUS Fenway Outfit—2 triangle stamps, small album, 5 blank approval sheets, 250 hinges, perforation gauge, 5 large French Colonials, 2 special deliveries, animal set, red cross set, packet 55 different, including Abyssinia, Azores, Cape of Good Hope, Bosnia, Crete, Congo, etc., 16-page price list, all for 12c to new approval applicants. Fenway Stamp Co., 161 Massachusetts Ave., Boston, Mass.

100 Different foreign 3c. Theodore Oliver, 813 Richmond Ave., Buffalo, N. Y.

\$2.50 buys 1,000,000-mark German Government 1923 Bond. We offer \$1,500.00 for 1,000,000 marks German Government 5% Bonds. All foreign bonds and currency dealt in. Frank H. Everett & Co., 35 Wall St., New York.

JUNIOR collector will exchange approvals, Victor, Box 45, Glenolden, Pa.

100 DIFFERENT New Europe Free to Applicants for our Net Approvals, Postage 2c. Badger Stamp Co., Milwaukee, Wis.

158 GENUINE Foreign Stamps. Mexico War Issues. Venezuela, Salvador and India Service, Guatemala, China, etc., only 5c. Finest approval sheets 50 to 60%. Agents Wanted. Big 72-p. Lists Free. We Buy Stamps. Established 20 years. Hussman Stamp Co., Dept. 55, St. Louis, Mo.

100 DIFFERENT stamps free to popular approval applicants; postage 2c. Christensen, 124 Second Street, Milwaukee, Wisconsin.

FOUR unused sets, hinges, 55 different, premium 15c. Deering, Newton St., Marlboro, Mass.

STAMPS, 105 China, etc., 2c. Album (500 illustrations) 3c. Bullard, Station AA, Boston.

FOREIGN Stamp Packet, sent free. Cornish Company, Schenectady, N. Y.

100 RARE stamps, all different, bargain lists, Stamp Magazine, everything 7c. Stanton, Niantic, Conn.

FREE 25 different U. S. stamps with 60% approvals, 45 different U. S. 10c. Seidenberg, Merton, Wis.

33 FOREIGN bills, splendid assortment, \$1.00. Otto Oddehon, Independence, Missouri.

BRITISH Colonials, 25 for 10c. 100 different foreign, 4c. Set Rheinland as premium for first purchase from approval sheets. Davies Stamp Co., Toledo, O.

STAMPS, 100. All different, 3 cents. Lists free. P. S. Quaker Stamp Co., Toledo, Ohio.

ALL different, 300, 25c.; 500, 50c.; 1,000, \$1.50. Fred Onken, 630 79th Street, Brooklyn.

RARE Coins, Medals, Paper Money. United States, Foreign and Ancient. Old Coin and New Catalogue, 10c. Alexis Mengelle, Box 387, Colorado Springs, Colo.

STAMPS—50 varieties, Africa, Brazil, Peru, Cuba, Mexico, etc., 10c. 50 different U. S. 25c. 1,000 hinges, 10c. 1,000 mixed, 40c. List free. C. Stogman, 5949 Cote Brillante, St. Louis, Missouri.

17 VARIETIES Bulgaria stamps, 20 cents. List of 7,000 low-priced stamps free. Chambers Stamp Company, 111 C. Nassau Street, New York City.

CALIFORNIA gold \$1/2 size, 27c.; \$1/4 size, 53c. White cent and catalogue, 10c. Norman Schultz, Colorado Springs, Colorado.

\$5.00 FOR 10c.—200 all different (mostly unused) from Ireland, Newfoundland, Jamaica pictorial, etc., triangle set, airplane set, small album and bargain lists—all for 10c to new approval applicants. Victoria Stamp Co., London, Canada.

200 MIXED Foreign, 12c. 50 U. S., each different, 15c. A. Hippchen, 118 No. La Salle, Chicago, Ill.

OLD Money Wanted. Do you know that Coin Collectors pay up to \$100.00 for certain U. S. Cents? And high premiums for all rare coins? We buy all kinds. Send 4c for large Coin Circular. May mean much profit to you. Numismatic Bank, Dept. 434, Ft. Worth, Tex.

SUPERB Newfoundland Stamps sent on approval. References please. Rev. Butler, St. Georges, Newfoundland.

ASIA—50 different, 15c. Browne, 90 Kemper St., Wollaston, Mass.

1000 DIFFERENT Stamps, wonderful quality, \$1.00. C. E. Nickles, 3002 Rodman St., Washington, D. C.

YOU'LL get profit and pleasure collecting old coins—Send 10c for genuine old coin and large coin catalog. This is just a get-acquainted-offer. Send today. You'll be delighted with it. B. Max Mehl, Numismatist, Dept. S, Mehl Building, Fort Worth, Texas. Largest Coin Firm in U. S.

OLD Coins. Large Spring Selling catalogue of coins for sale free. Catalogue quoting prices paid for coins, ten cents. William Hesslein, 101B Tremont Street, Boston, Mass.

MR. ADVERTISER: Ask to-day for a copy of the "Quick-Action Advertising Rate Folder." It contains some really important facts which will prove interesting and valuable to you. It also tells "How You Can Use Popular Science Monthly Profitably." You'd like to know, wouldn't you? Address your inquiry to: Manager, Classified Advertising, Popular Science Monthly, 250 Fourth Ave., New York.

### WANTED

WANTED: Light Machinery, Lathes, Drill Presses, Model High Speed Gasoline and Steam Motors. Best Cash Prices Paid. Motor Specialties Co., Crafton, Penna.

WANTED—Representatives in every factory in the United States. Popular Science Monthly, 250 Fourth Ave., New York.

DETECTIVES needed everywhere. Experience unnecessary. Particulars free. Write, George Wagner, former Government Detective, 1968P Broadway, N. Y.

WANTED, representatives in every factory, mill, mine, creamery, meat packing establishment, provision and ice house in the United States. Atlas Shoe Co., Not Inc., 1441 Sedgwick St., Chicago, Ill.

### DISTRICT MANAGERS AND REPRESENTATIVES WANTED

WORLD'S fastest selling auto accessory! County distributors wanted; write to-day. G. L. W., Spring Oil Co., San Diego, California.

**More Money Making Opportunities**  
on pages 10 to 26

## Home Protection

with an  
**ASTRA**  
Automatic  
will cost little



Nearly every man wants a gun in the house—he feels better able to protect his family. We are able to offer these Genuine Astra guns at special prices because we bought before recent tariff raises became effective. Really fine guns, beautifully finished, hard hitting. Use standard ammunition. Order direct from U. S. importers.

**\$7.75** 25 cal., 7 shot ASTRA, C.O.Q. Automatic.  
**8.95** 25 Cal., 7 shot ASTRA, Automatic.  
**9.95** 25 cal., 7 shot ASTRA, triple safety.  
**10.95** 32 cal., 10 shot ASTRA, extra magazine.

**\$16.95** "The Plainsman" Revolver



32-20 and 38 long calibre; except for difference in calibre, the same gun in weight, size and appearance. A regular he-gun, best blued steel, fully guaranteed, uses standard revolver ammunition. Only \$16.95.

Write for firearms catalogue. We guarantee perfect workmanship and material; every gun brand new; of drop forged steel throughout. Before buying any gun insist on this guarantee. Send no money unless you wish. Pay postman on delivery plus postage. Money cheerfully refunded if not fully satisfied. ACT NOW to get these SPECIAL LOW PRICES. WRITE TODAY.

**CALIFORNIA TRADING COMPANY**

Dept. 12 747 Warehouse St., Los Angeles, Cal.

### Carrying Case FREE with 3 ft. Telescope

See people and objects miles away just like they were close; see Moon and Stars as never before. Opens over 3 ft. long, 5 sections, brass bound, powerful lenses. Useful and entertaining. You could tell color of aeroplane 4 miles away. "Mrs. Yarbrough. 'Watch my boy arrive at school 2 miles away.'—Mrs. Horn. 'Read numbers on freight cars miles away, see mountains on moon.'—A. C. Palmer. 'Thousands blessed.' Write today; on arrival of 3 ft. Telescope with FREE Carrying Case and Money Strapper Postman only \$1.85 plus a few pennies postage. Satisfaction guaranteed. FERRY & CO., 3224 N. Halsted St., Dept. 9782, CHICAGO

## AGENTS EARN A GOOD INCOME

You can sell Premier Knife Sharpeners to housewives, restaurants, stores, etc. 9 out of 10 will buy. Sells for 50c. Write today for attractive offer. PREMIER MFG. CO. Dept. 9, Detroit, Mich. **LARGE PROFIT for you**

## BOOKS

FOR Painters and Decorators, Card Writers, Carpenters, Auto Mechanics, Electricians, Sheet Metal Workers, Welders. Write for catalog of 200 books for all trades. Free.

**FREDERICK J. DRAKE & CO., Publishers**  
1003 So. Michigan Avenue, Chicago, Ill.



For Vaudeville, Club, Lodge, School, and Parlor Entertaining, is easily learned by the Balda Method. Beginners Instructions with 23 Comic Trick Drawings for \$1.00. Big List of Chalk Talk Programs and Supplies Free. **BALDA ART SERVICE** Dept. 7, Oshkosh, Wis.



### WANTED—Railway Postal Clerks

**\$133 to \$192 A MONTH MEN—BOYS 18 up**  
Travel—See Your Country  
Mail coupon Today; Sure  
Name.....  
Address.....

**FRANKLIN INSTITUTE**  
Dept. T-281, Rochester, N. Y.  
Sirs: Send me, without charge, (1) specimen Railway Postal Clerk Examination questions; (2) list of U. S. Government jobs now obtainable; (3) Send free sample coaching lessons.





1054 Blue Print Working Plans and Specifications only \$10.00

## 200 WAYS for Home-Builders to SAVE MONEY

People building their first homes are constantly making little mistakes which often run into \$1,000 or more. But at last a service is offered to you that not only shows you how to avoid these costly errors but actually points out many short cuts that reduce the cost of building. In a wonderful new book called "Beautiful Homes" you are given plans for more than 200 homes of all types—plans that have been tested by actual building. You are shown the very latest styles in Stucco, Brick, Tile and Frame Houses and how to choose intelligently between different materials. You get the latest ideas on Interior Decorating. With this De Luxe Plan Book you receive a year's subscription to Keith's Magazine, the recognized authority for twenty-five years. Just send your name and address and pay the postman \$3 plus a few cents postage upon arrival. Write at once.

### KEITH'S MAGAZINE

An authority for twenty-five years on home-building, comes to you for a year under this amazing offer—hold on news-stands twenty-five cents a copy.

KEITH CORPORATION

100 N. 7th St., Dept. 19-B, Minneapolis, Minn.

## MEN WANTED



We want one ambitious man in each county as Sales Representative. Our Salesmen make big money taking orders for the Cole Visible Gasoline Gauge. Only scientifically accurate gasoline gauge that fits on instrument board—always in sight—prevents short measure—stops running out of gas—low price—in class by itself—sells on sight.

**\$10 to \$20 a Day**  
for 6 to 8 hours. You get your pay in advance. We deliver and collect. Commissions paid on repeat orders. Exclusive territory. Capital not necessary. Write

THE STEMCO  
ENGINEERING CO.  
207 Webb St., Dayton, Ohio

## & Music Lessons WITH AN ACCREDITED SCHOOL At Home

**A Complete Conservatory Course By Mail** Wonderful home study music lessons under great American and European teachers. Endorsed by Paderewski. Master teachers guide and coach you. Lessons a marvel of simplicity and completeness. **Any Instrument** Write telling us course you are interested in—Piano, Harmony, Voice, Public School Music, Violin, Cornet, Mandolin, Guitar, Banjo, or Reed Organ—and we will send our Free Catalog with details of course you want. Send now. **UNIVERSITY EXTENSION CONSERVATORY**  
97 Siegel-Myers Bldg. Chicago, Illinois



**WONDERFUL DISCOVERY.** Sunk letters guide your hand. Correct your penmanship in one week. Big improvement in one hour. Positive proof sent free. Write, C. J. Ozment, 33 St. Louis, Mo.



### Saw Books FREE

"Saws in the Shop," "Saw Sense," "Saws on the Farm." Just send us your name and address and say which of these helpful books you want and we will send it FREE. Write NOW.

E. C. ATKINS & CO., Inc.  
Dept. D-20 Indianapolis, Ind.

# BARBERING

## Now One of the Highest Paid Professions!

**\$90 to \$150 Every Week!**

**BE A "WHITE-COLLAR" MAN—  
Earn \$90 to \$150 a Week—CLEAN Money!**

What's the use of doing dirty, greasy, hard work, when you can NOW make TWICE as much money in a manly profession that is CLEAN, profitable and full of opportunities?

**Easy to Learn—  
Quick to Earn!**

That's BARBERING for YOU! And the best part of it all is this—scientific barbering, as taught the modern MOLER way, makes YOU a Master Barber in a short course of intensive training, at small expense! You soon step out as your own Boss, if you wish, in your own Shop, which we will gladly help you equip.

**See the World,  
Too!**

Or, if you prefer, we will help you step into a real job, with good pay the first day, after you graduate. Ocean Liners, crack trans-continental passenger trains, big luxurious hotels and skyscrapers all over the world, as well as thousands of Barber Shops everywhere, demand MOLER trained men.

**MOLER Graduates  
Are Always Busy!**

MOLER trained Men are always given the preference, for they alone possess the valuable, thorough MOLER training in the application of all the latest scientific Barbering methods, including the Electric hair cutter, the mechanical massage, and the latest vogue in ladies' hair bobbing. MOLER also gives special training in ladies' marcelling and an easy practical course in the treatment of skin diseases.

**Earn While  
Learning!**

"Where there's a Will there's a Way" to earn BIG pay! Write to the nearest MOLER College, there is one near you, and learn how you can earn while you learn the barber trade. Ask for the new FREE MOLER Barbering Booklet C. Find out HOW MOLER helps you help yourself AFTER you graduate, as well as BEFORE! Find out why MOLER Men are making DOUBLE the money others made last year, before Ladies' Shingle Bobbing became so popular. You're NEXT in line for big pay—the MOLER way. Send Coupon TODAY!

## MOLER SYSTEM OF COLLEGES

30 Branches in United States and Canada

New York, N. Y.	Cleveland, Ohio	Atlanta, Ga.
Chicago, Ill.	Detroit, Mich.	Memphis, Tenn.
St. Louis, Mo.	Denver, Colo.	Dallas, Tex.
Kansas City, Mo.	Omaha, Nebr.	Houston, Tex.
Cincinnati, Ohio.	Milwaukee, Wis.	San Antonio, Tex.
	New Orleans, La.	

# THIS?



The Majestic, Leviathan, and U. S. Shipping Lines all carry barbers.

# NEXT!

For BIG Pay

Mail THIS

**MOLER SYSTEM OF COLLEGES**  
Address Nearest Branch >>>  
(Street Address NOT Needed)  
Please send me without obligation on my part your Booklet C.  
Name.....  
Address.....  
City..... State.....

# LEARN RADIO

Become a big-pay man in the greatest industry of all time. Quickly, easily and right at home, you can fit yourself for highest salary positions, or you can cash in on your spare time. The call is urgent for mechanics, operators, designers, inspectors. Unlimited, fascinating opportunities on land or sea.

**I WILL TRAIN YOU AT HOME TO BE A RADIO EXPERT**

Under my practical, easy to understand, instruction—you qualify in an amazingly short time. No previous experience is necessary. Every branch of radio becomes an open book to you. You learn how to design, construct, operate, repair, maintain and sell all forms of Radio apparatus. My methods are the latest and most modern in existence.

**FREE** Wonderful home construction tube receiving set of the latest design. **Write Today "Radio Facts" FREE**

H. G. Mohaupt, Radio Engineer, RADIO ASSOCIATION OF AMERICA, Dept. 42, 4513 Ravenswood Ave., CHICAGO







## \$1000 REWARD For the Capture of This Man

**CONVICT** 6138, escaped from the State Penitentiary; Name, Charles Condry; age 37; Height 5 ft. 8 in. Weight 141 pounds; Hair, light brown; Eyes, gray.

Easy enough to identify him from his photograph and this description, you may say—but, Condry took the name of "Brown," dyed his hair, darkened his skin, grew a mustache, put on weight and walked with a stoop.

Yet, he was captured and identified so positively that he knew the game was up and returned to the penitentiary without extradition. How was it accomplished? Easy enough for the Finger Print Expert. They are the specialists, the leaders, the cream of detectives. Every day's paper tells their wonderful exploits in solving mysterious crimes and convicting dangerous criminals.

## More Trained Men Needed

The demand for trained men by governments, states, cities, detective agencies, corporations, and private bureaus is becoming greater every day. Here is a real opportunity for YOU. Can you imagine a more fascinating line of work than this? Often life and death depend on finger print evidence—and big rewards go to the expert. Many experts earn regularly from \$3,000 to \$10,000 per year.

## Learn at Home in Spare Time

And now you can learn the secrets of this science at home in your spare time. Any man with common school education and average ability can become a Finger Print Detective in surprisingly short time.

## Free Course in Secret Service

For a limited time we are making a special offer of a **Professional Finger Print Outfit** absolutely free, and **Free Course in Secret Service Intelligence**. Mastery of these two kindred professions will open a brilliant career for you.

Write quickly for fully illustrated free book on Finger Prints which explains this wonderful training in detail. Don't wait until this offer has expired—mail the coupon now. You may never see this announcement again! You assume no obligation—you have everything to gain and nothing to lose. Write at once—address

**University of Applied Science**  
Dept. 13-62, 1920 Sunnyside Ave., Chicago, Ill.

**UNIVERSITY OF APPLIED SCIENCE**  
Dept. 13-62, 1920 Sunnyside Ave., Chicago, Ill.

Gentlemen:—Without any obligation whatever, send me your new, fully illustrated, FREE book on Finger Prints and your offer of a FREE course in Secret Service Intelligence and the Free Professional Finger Print Outfit.

Name.....

Address.....

Age.....

## BIG NOVELTY BARGAIN! 10 Cts.



### THROW YOUR VOICE

Into a trunk, under the bed or anywhere. Lots of Fun fooling the Teacher, Policeman or Friends. Barrels of Fun.

### THE VENTRILO,

A little instrument, fits in the mouth out of sight, used with above for Bird Calls, etc. Sent with full instructions; anyone can use it, NEVER FAILS. Also a 32 PAGE BOOK ON VENTRILOQUISM. Formula for Secret Writing, 12 Money Making Secrets and the marvelous

### NOVELTY X-RAY WONDER

With it you can apparently see the bones in your fingers, lead in pencil, etc.; lots of fun with this outfit. Also 10 Big Magic Tricks Free with every order. All the above Novelties by prepaid mail for 10¢

Dept. 755 **VENTRILO COMPANY**  
Norwalk, Conn.  
LARGEST and OLDEST Mail Order House in Connecticut.

## The Electrician's Wiring Manual

By F. E. Sengstock, E. E.

Contains all the information needed for the proper installation of lighting and power systems in housing and other buildings.

It completely covers inside electrical wiring and construction in accordance with the National Electric Code.

Pocket size—flexible binding

448 pp. Price \$2.50

POPULAR SCIENCE MONTHLY  
250 Fourth Ave., New York City

## "DON'T SHOUT"



"I hear you. I can hear now as well as anybody. 'HOW?' With THE MORLEY PHONE. I've a pair in my ears now, but they are invisible. I would not know I had them in, myself, only that I hear all right."

The Morley Phone for the

### DEAF

is to the ears what glasses are to the eyes. Invisible, comfortable, weightless and harmless. Anyone can adjust it. Over one hundred thousand sold. Write for booklet and testimonials.

THE MORLEY CO., Dept. 797, 10 S. 18th Street, Philadelphia

## ANY BOOK IN PRINT

Thousands of Titles at  
**1/2 Price and less**

Delivered at your door. We pay the postage. Standard authors, fine editions, new books, all at biggest savings. Be sure to send postcard for Clarkson's catalog.

**FREE** Write for our great book catalog. This catalog is a short course in literature and is so used by some of America's leading universities; 800,000 book lovers buy from it. Free if you write now.


**DAVID B. CLARKSON** THE BOOK BROKER  
220 CLARKSON BUILDING, CHICAGO, ILL.



### One Man Saws 15 Cords a Day!

—Easy with the OTTAWA Log Saw! Wood selling for \$3 a cord brings owner \$45 a day. Use 4 H. P. Engine for other work. Wheel mounted—easy to move. Saws faster than 10 men. Shipped from factory or nearest of 10 Branch houses. Write for FREE Book—"Wood Encyclopedia"—today.

**OTTAWA MANUFACTURING CO.**  
1801-T Wood Street Ottawa, Kansas  
Room 1801-T Magee Bldg., Pittsburgh, Pa.

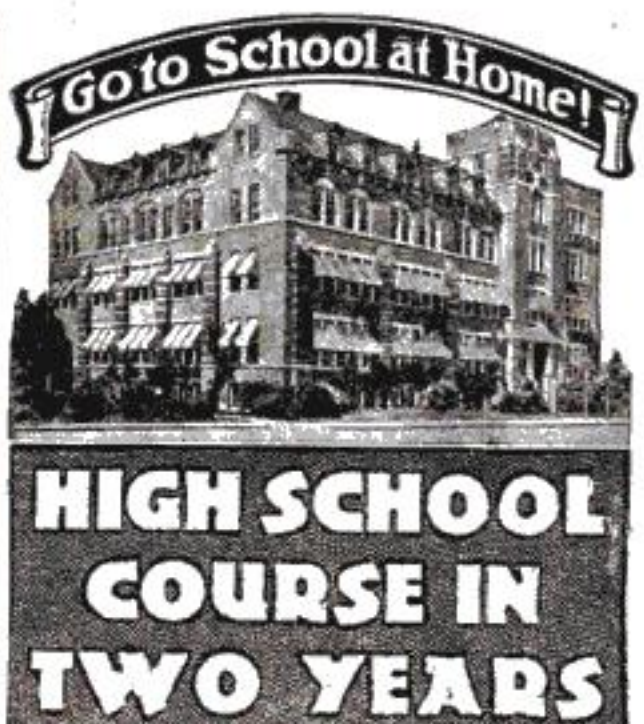

## Go to School at Home!

# HIGH SCHOOL COURSE IN TWO YEARS

## YOU ARE BADLY if you lack HANDICAPPED High School training.

You cannot attain business or social prominence. You are barred from a successful business career, from the leading professions, from well-paid civil service jobs, from teaching and college entrance. In fact, employers of practically all worth-while positions demand High School training. You can't hope to succeed in the face of this handicap. But you can remove it. Let the American School help you.

## FIT YOURSELF FOR A BIG FUTURE

This course, which has been prepared by some of America's leading professors, will broaden your mind, and make you keen, alert and capable. It is complete, simplified and up-to-date. It covers all subjects given in a resident school and meets all requirements of a High School training. From the first lesson to the last you are carefully examined and coached.

## USE SPARE TIME ONLY

Most people idle away fifty hours a week. Probably you do. Use only one-fifth of your wasted hours for study and you can remove your present handicap within two years. You will enjoy the lessons and the knowledge you will gain will well repay the time spent in study.

Check and mail the coupon NOW for full particulars and Free Bulletin.

## American School

Dept. H-275  
Drexel Ave. and 58th St., Chicago

## American School

Dept. H-275 Drexel Ave. & 58th St., Chicago  
Send me full information on the subject checked and how you will help me win success.

- |                              |                            |
|------------------------------|----------------------------|
| .....Architect               | .....Business Law          |
| .....Building Contractor     | .....Lawyer                |
| .....Automobile Engineer     | .....Machine Shop Practice |
| .....Automobile Repairman    | .....Mechanical Engineer   |
| .....Civil Engineer          | .....Shop Superintendent   |
| .....Structural Engineer     | .....Employment Manager    |
| .....Business Manager        | .....Steam Engineer        |
| .....Cert. Public Accountant | .....Foremanship           |
| .....Accountant and Auditor  | .....Sanitary Engineer     |
| .....Bookkeeper              | .....Surveyor (& Mapping)  |
| .....Draftsman and Designer  | .....Telephone Engineer    |
| .....Electrical Engineer     | .....Telegraph Engineer    |
| .....Electric Light & Power  | .....High School Graduate  |
| .....General Education       | .....Wireless Radio        |
| .....Vocational Guidance     | .....Undecided             |

Name.....

Address.....



## PRICES REDUCED

Only  
**\$3**  
Down



A  
Year  
to Pay

Yes, lowest prices on **UNDERWOOD, REMINGTON, L. C. SMITH, ROYAL**, and all standard makes on easiest terms ever offered. Re-manufactured like new by the famous "Young Process."

### 10 Days' Trial—5 Years Guarantee

Our liberal "direct from factory plan" saves half. You actually use the typewriter 10 days without obligation to buy. Let us prove we have the greatest typewriter bargains ever offered. Big saving.

### Big Illustrated Catalog Free

This interesting valuable book explains fully how "Young Process of Re-Manufacturing" guarantees you highest quality, perfect service and satisfaction.

**YOUNG TYPEWRITER CO. Est. 1911**

Send Coupon Now

Young Typewriter Co., Dept. 1422  
654 W. Randolph St., Chicago

Send me Free book and Special Reduced Prices. This does not obligate me in any way.

Name.....

Address.....

City..... State.....

## MAKE MONEY AT HOME

YOU can earn good money at home in your spare time making show cards for us. No canvassing or soliciting. We show you how by our new simple method. We supply both men and women with work at home, no matter where you live and pay you cash for all work completed each week. Full particulars and booklet free. Write today.

**AMERICAN SHOW CARD SYSTEM, LIMITED**  
206 Adams Building Toronto, Canada

## ADDING MACHINES

Your choice of Burroughs, Dalton, Wales and all standard makes often at less than one-third regular price! All sizes and styles. Every machine guaranteed A-1 condition. Rebuilt by experts.

### SOLD ON INSTALLMENTS

You can buy a regular \$300 machine for as low as \$5 down. Why pay big prices? Hundreds of well-known firms our customers. Write for FREE list of models and bargain prices that save you money. Do it NOW.

**RELIABLE ADDING MACHINE CORP.** Dept. 102  
168 W. Washington Street CHICAGO, ILL.

## THE CLOTHING INDUSTRY

is the second largest business in the country. Men have made fortunes in it. So can you if you go into it right. We'll put you into it right without one penny of expense to you, supply everything you need to get into the business and clear from \$100.00 to \$200.00 a week, right from the start. This is a wonderful opportunity for the right man. If you think you are that man, write us at once. Address Dept. 532, **GOODWEAR** Chicago, Inc., West Adams Street at Peoria, Chicago.

## Learn Cartooning

At Home—In Your Spare Time

from the school that has trained so many successful cartoonists of today earning from \$50 to \$200 and more a week. The Landon Picture Chart Method of teaching makes original drawing easy to learn. Send 6c in stamps for full information and chart to test your ability. Also state age.

**THE LANDON SCHOOL**  
1451 National Bldg., Cleveland, O.



## Clear Your Skin!

Your Skin Can Be Quickly Cleared of Pimples, Blackheads, Acne Eruptions on the face or body, Barbers Itch, Eczema, Enlarged Pores and Oily or Shiny Skin.

**FREE** Write today for my FREE BOOKLET, "A CLEAR-TONE SKIN,"—telling how I cured myself after being afflicted 15 years.  
**E.S. GIVENS, 153 Chemical Bldg., Kansas City, Mo.**

# How New Method Makes Cartooning Astonishingly Easy to Learn!

Cartoonists earn from \$50 to over \$250 a week! Why don't you make big money in cartooning when new method makes it so easy to learn—at home in spare time?

**T**HOUSANDS who never dreamed they could make cartoons, can now earn big money in this fascinating field. Right at home in your spare time, you can now easily learn to make all kinds of cartoons—comic, sport, political, human interest and animated. You can now earn some of the big money paid for cartoons of every description.

And cartooning *does* pay enormous money! Briggs, Bud Fisher, Fontaine Fox, George McManus, Sid Smith and all the other head-liners *earn more than the President*. A single cartoon idea can easily mean a splendid life-salary for you.

## The World's Easiest, Pleas- antest and Best Paying Profession

How could money be earned more pleasantly? A few hours a day at work that is as enjoyable as play—and there is almost no limit to the money that can be earned!

Never before have the opportunities in cartooning been so many or so varied. Never has there been such a splendid chance to earn big money for cartoons. And regardless of what you are doing at present or how poorly you draw now, you can easily and quickly learn to make cartoons thru this new easy method.

## New Easy Way to Learn Cartooning

It's fun learning to make cartoons this new way. It's just like a game. You learn at home, yet it is just as if an instructor stood at your elbow. You don't need to know a thing about cartooning. You start with straight lines and curves. Then you learn the little secrets of originating cartoon ideas, the methods of exaggeration, of action and expression—all the little tricks that make cartooning amazingly easy to those who know them. And soon you are making *real* cartoons. Many of our students had cartoons published before they were half thru their courses.

When learning to make cartoons is so easy, why shouldn't you too make big money and enjoy the fun of cartooning.

### What Students Say:

I am now working for myself and find all I can do. I find no trouble in cleaning up in the neighborhood of \$250 a week. I have my own syndicate and am gradually branching out into a good field.  
**R. P. LAWRENCE, MASS.**

### Free Employment Bureau

I want to thank you for the personal interest you have taken in me while receiving instruction from your school and for referring me to this magazine.  
**F. M. MEMPHIS, TENN.**

**\$125 a Month Spare Time**  
I wish to take this opportunity to recommend your school. I have been doing a great deal of commercial work—making on the average of \$125 a month in spare time.  
**T. W. P. CHARLOTTE, N. C.**



Graduates of this school are to be found in every section of the country. Read in the panel what they are doing and what they say about this training.

## Mail Coupon for Free Book

Learn more about the wonderful opportunities for making money in Cartooning and how this new method makes it easy for you to learn. Read about our students, how they make money while learning, and big salaries after they graduate. Our handsomely illustrated booklet is crammed full of interesting facts on Cartooning and describes in detail this remarkable method of teaching cartooning. It will be sent to you without obligation. Mail the coupon for this booklet *now*.

**Washington School of Cartooning**  
Room 242C, 1113-15th St., N. W., Washington, D. C.

**WASHINGTON SCHOOL OF CARTOONING.**  
Room 242C, 1113-15th St. N. W., Washington, D. C.

Please send me, without obligation, your Free Booklet on Cartooning and full details on your new easy home-study method of teaching Cartooning. (Please Write Plainly.)

Name.....  
(State whether Mr., Miss or Mrs.)

Address.....

City..... State.....  
(If under 16, please give age.....)

## \$25.00 in PRIZES

See top page 10 in front of book for details

## WANTED

**Railway Postal Clerks**  
\$1600 to \$2300 Year

**MEN—BOYS 18 or Over**

Steady work. No layoffs. Paid vacations.  
Common education sufficient.

**Travel—See Your Country**

Mail Coupon today—SURE




**FRANKLIN INSTITUTE, Dept. T277, ROCHESTER, N. Y.**  
Sir: I want to travel. Send me without charge (1) Specimen Railway Postal Clerk Examination questions. (2) List of other U. S. Government jobs now obtainable. (3) Send free sample coaching lessons.

Name.....

Address.....



# Build your own 5-Tube Neutrodyne from **FADA** parts

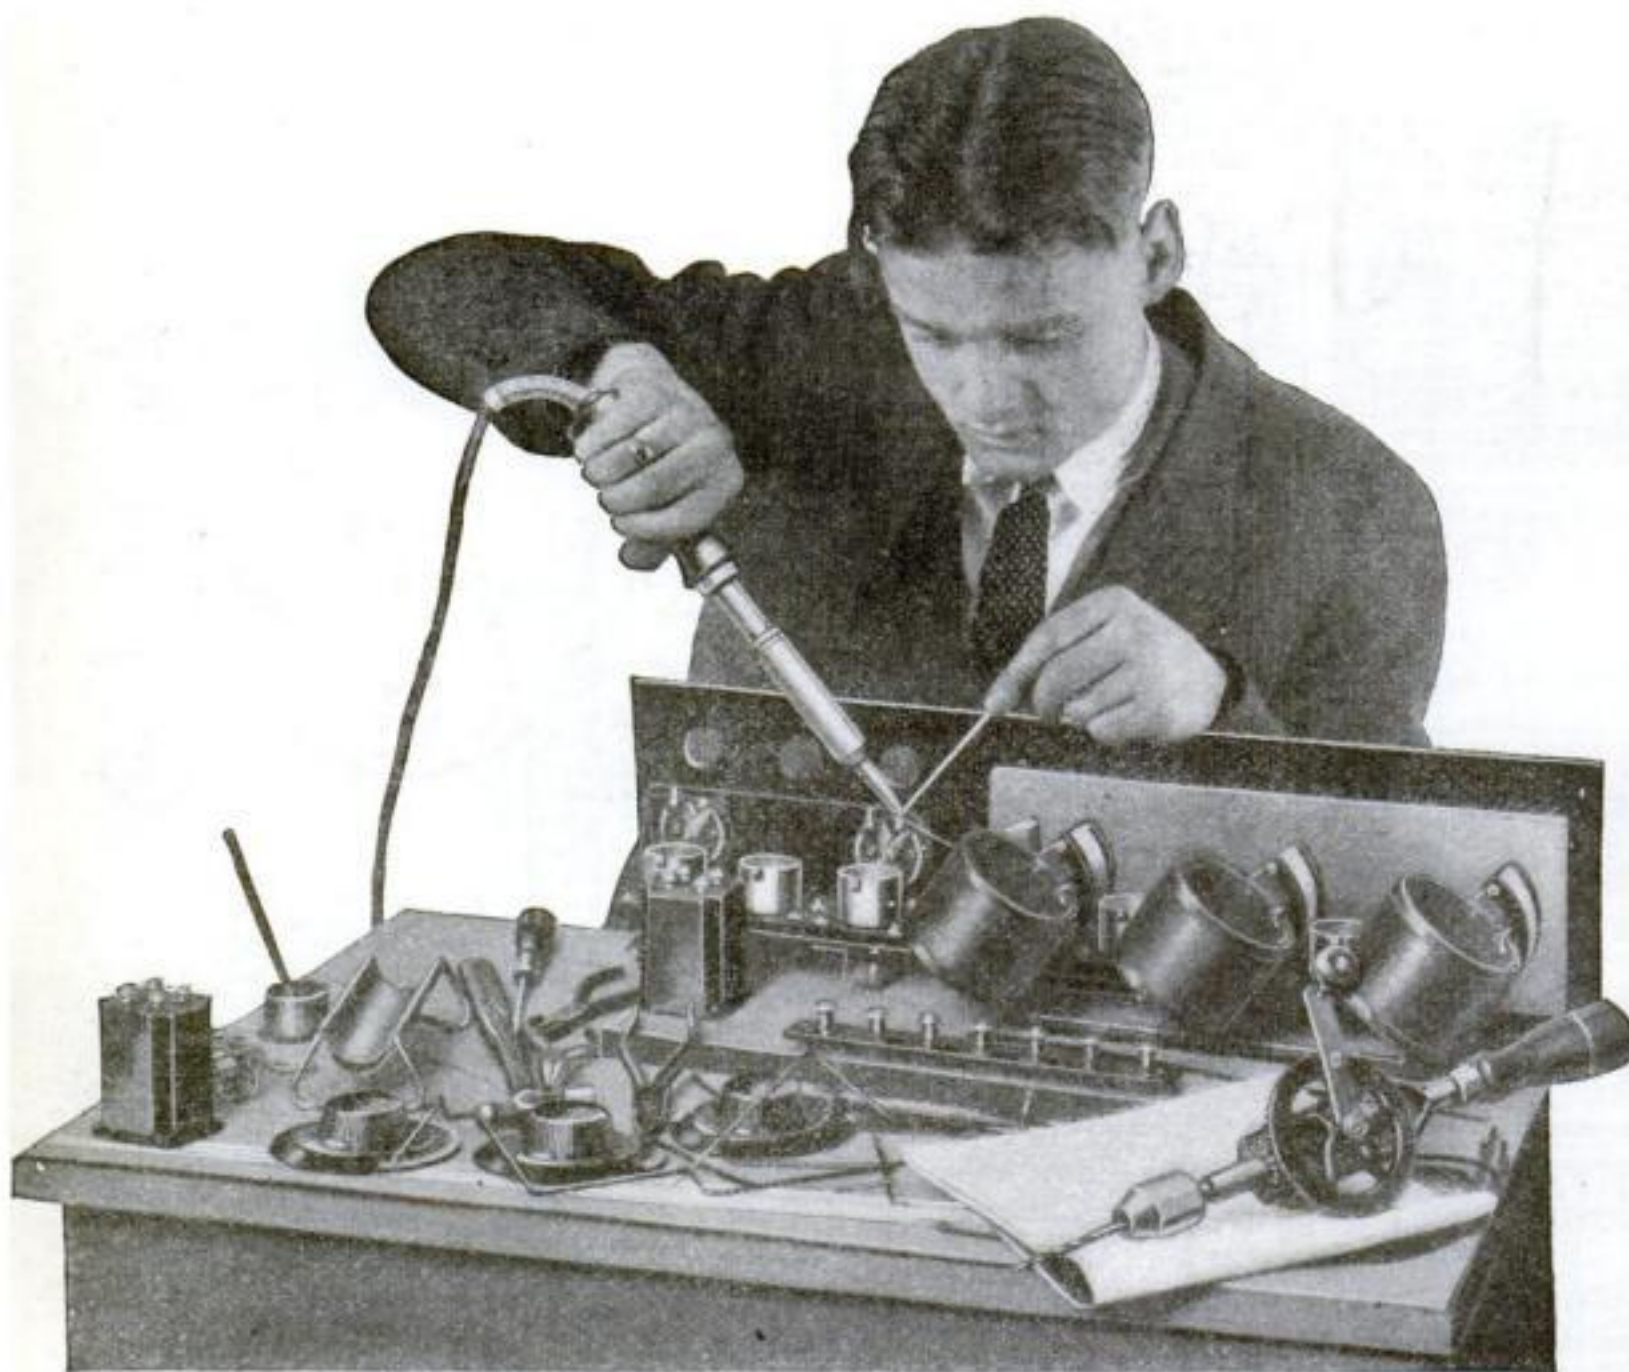

BUILD this wonderful 5-tube set yourself and save money. For \$72 you can get the new FADA outfit of Neutrodyne parts, complete and guaranteed to be of the finest quality. With it you also get the new FADA book, "How to Build a FADA Neutrodyne Radio Receiver." Thirty pages devoted to "trouble shooting." Also a large picture wiring diagram. The price of this book is 75 cents, either at your dealer's or direct from us, but as a special inducement the coupon below will be honored by us (for this month only) in part payment.


F. A. D. ANDREA INC., 1581 JEROME AVENUE, NEW YORK

—This coupon has a 50-cent value—

F. A. D. ANDREA, INC., 1581 JEROME AVENUE, NEW YORK

P. S. Mo., Feb. '25

Gentlemen: In consideration of the use of this coupon and twenty-five cents enclosed, ☐ stamps, ☐ P. O. order, please send me your book, "How to Build a FADA Neutrodyne Radio Receiver."





Name.....  
Street Address or R. F. D.....  
City or Town.....



## 75c



# Radio-Frequency Transformers under Test

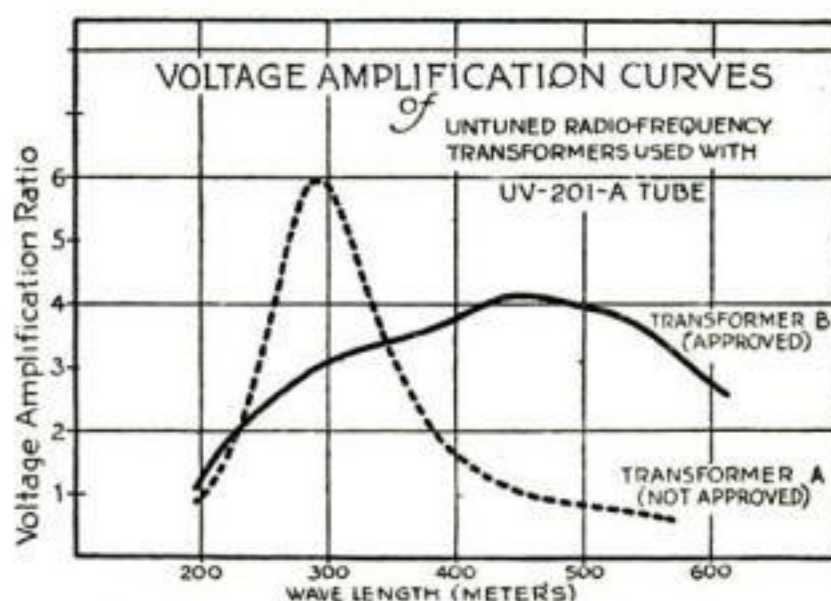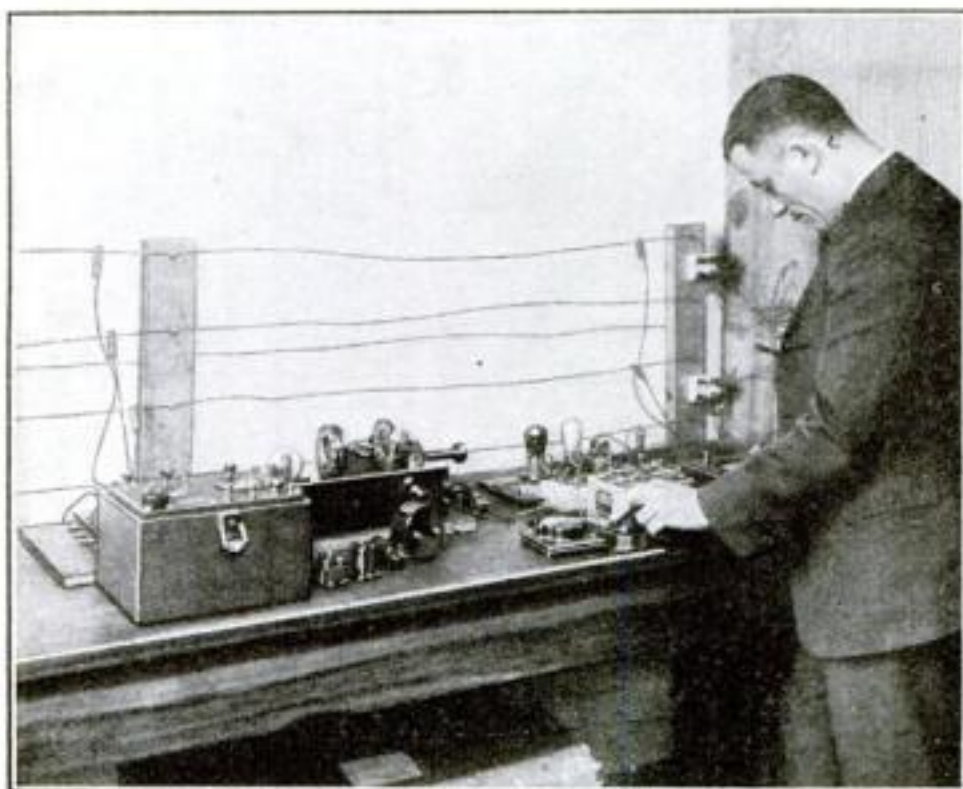

Two transformers were incorporated into the test circuit illustrated on the left. The curves drawn represent the variations of amplification. The transformer with the pronounced variation was disapproved; the other, whose curve was more uniform, approved

By Alexander Senauke, M.E.

Radio Engineer of the  
Popular Science Institute of Standards

**N**O MATTER how well a set is built and how efficient the circuit employed, if the parts used in the set are not up to standard, satisfactory results cannot be expected. Just one deficient part is enough to lower the efficiency of a whole set and too much emphasis cannot be put on the necessity of employing high grade units throughout.

Even the man who is most familiar with radio encounters trouble in differentiating between good and bad parts and cannot locate the particular part or parts that are interfering with the efficiency of his receiver. The mere fact that a high price is paid for parts does not necessarily indicate that their value is high.

Every radio part, as well as other radio and tool products advertised in POPULAR SCIENCE MONTHLY, has passed the rigorous laboratory and practical tests of the Popular Science Institute of Standards. One of the most interesting of the tests on radio parts is the test on radio-frequency transformers.

In testing untuned radio-frequency transformers such as are used in a great many loop and reflex sets, and the transformers that are used in super-heterodyne sets, for intermediate frequency amplification, we first give them a thorough inspection as to construction.

The next step is to measure the constants of primary and secondary windings to determine how well they match the tube characteristics that they are to be used with.

We then incorporate the transformer under test into a test circuit and determine its voltage amplification through its rated range of frequency. A curve is

drawn representing variations of amplification with frequency (or wave lengths).

In the case of ordinary radio-frequency transformers, we study the curve to see how nearly the amplification approaches that of an ideal transformer that would give uniform amplification for all frequencies. Our basis of approval is how nearly that curve approaches the ideal.

It is a disadvantage of all untuned radio-frequency transformers that they do not receive all wave lengths equally well. Most radio-frequency transformers have amplification peaks that make them favor stations operating on corresponding wave lengths. On other wave lengths the efficiency is greatly reduced.

The curves illustrated above show how one transformer that was disapproved failed to give any degree of uniformity in

amplification of wave lengths and how comparatively slight the variations were of an approved transformer.

In the case of transformers that are intended for use in super-heterodynes, similar voltage-amplification curves are taken for the entire set and a study is then made of these curves to determine how well these transformers are matched as to characteristics.

Such transformers, to receive our approval, must have amplification characteristics that match within reasonable limits. Here, again, we cannot insist on an absolute match that would be impossible except in a case where a set of transformers were specially constructed. In addition to the above-mentioned requirement, transformers must show a fair degree of amplification and must be of sound mechanical and electrical construction.

Wherever possible, the conclusions from the above tests are corroborated by the actual use of the transformer, or set of transformers, in radio receiving circuits for which they are designed.

The builders of individual sets or the manufacturers of complete sets who employ radio-frequency transformers, or other radio parts that are approved by the Popular Science Institute of Standards, knows that they have passed rigid tests and will add to and not detract from the efficiency of his set.

It is obviously impractical for even as completely organized a bureau as the Institute of Standards to test all products listed in tool or radio catalogues advertised in our columns. Only tool and radio products specifically advertised in POPULAR SCIENCE MONTHLY are tested and approved by the Institute.

Send for List of Approved Products

## POPULAR SCIENCE Monthly Guarantee


The above seal on an advertisement indicates that the products referred to have been approved after test by the Popular Science Institute of Standards.

Popular Science Monthly guarantees every article of merchandise advertised in its columns. Readers who buy products advertised in Popular Science Monthly may expect that these products will give absolute satisfaction under normal and proper use. Our readers in buying these products are guaranteed this satisfaction by Popular Science Monthly.

THE PUBLISHERS.





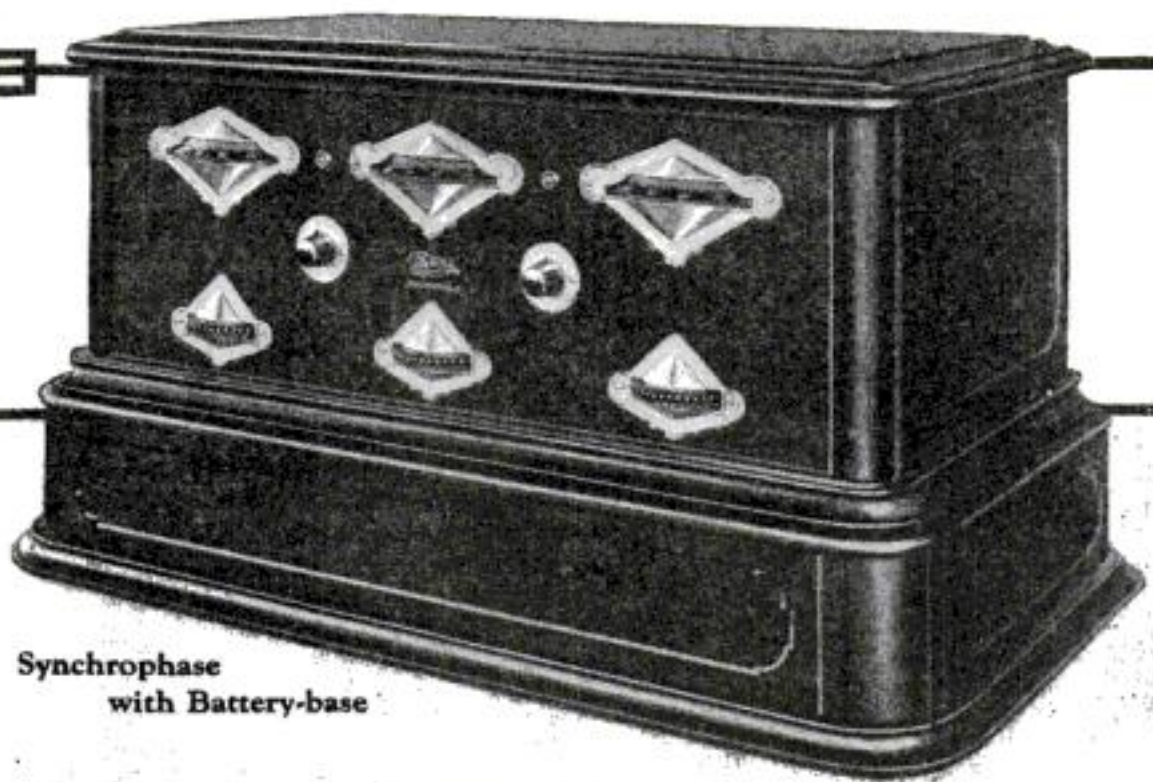

Synchrophase  
with Battery-base

IT IS WRITTEN:

"A slight deviation  
leads to a great error."

There are no deviations, however slight,  
in the making of a  
Synchrophase; each  
is a masterpiece.

*Doctor W. H. H.*

# THE GREBE SYNCHROPHASE

TRADE MARK

INTO this masterpiece of design and craftsmanship are built the knowledge and experience gained during fifteen years by the manufacturer who stands pre-eminent in the industry.

Binocular coils give the Synchrophase a degree of selectivity found in no other receiver. Two stages of balanced tuned radio frequency—the result of exhaustive research—are responsible for its unsurpassed sensitivity. Its thorough ease of operation is made possible by the S-L-F condensers and a volume control giving an unbroken range of six variations of audio amplification.

To see the Synchrophase is to appreciate its charm; to operate it, is to realize its true excellence.

Ask your dealer, or write us for literature.

**A. H. GREBE & COMPANY, INC.**

Van Wyck Blvd., Richmond Hill, N.Y.

Western Branch: 443 So. San Pedro St., Los Angeles, Cal.

All Grebe apparatus is covered by patents granted and pending.

THIS COMPANY OWNS AND OPERATES STATION WAHG.



Synchrophase Secrets  
No. 2 The S-L-F Condenser  
(Straight line frequency)

This ingenious device eliminates the crowding of low wave stations toward the lower end of the dials; the settings for the various broadcast stations being spaced at equal intervals around the dials. The circuits are so arranged that the settings for a given station are identical on all three dials.

The S-L-F Condenser makes the Synchrophase a receiver that is unrivalled in its simplicity and ease of dependable operation.







# A Sailing Ship without Sails; New Wonder of the Seas

Huge spinning cylinders harness the wind—Inventor plans to take strange vessel across the ocean this year

*By G. B. Seybold*

**F**ROM the wharves at Kiel, Germany, the schooner *Buckau* recently put out to sea, a ship without sails or steam. Like a ghost ship it moved mysteriously through the water with no apparent means of propulsion.

The astounded spectators on shore knew that the boat was an old 2000-ton steel vessel and that previously 500 square yards of canvas had been needed to propel her. But now she was denuded of all sails, masts, and rigging. Instead, two strange cylinders, resembling giant smoke-stacks, rose from her deck. But no smoke was pouring from them and no engine noise was heard. There was no churning of screws. Yet the ship plowed its way through the rough waters of the Baltic, and at nearly twice its former speed.

**F**OR several weeks the secret of the strange ship with the great towers was closely guarded. People were told only that the craft was equipped with a Flettner rotor, a new invention, the work of Anton Flettner, director of the Institute of Aerodynamics at Amsterdam, Holland.

When finally the explanation came, the world gasped in amazement. For Doctor Flettner calmly announced that he had returned to the wind as a source of energy. He had harnessed it in a new way. He had developed an invention that may permit ocean liners to reduce their crews two-thirds and save 90 per cent in fuel. He

had provided a way for one man to operate a ship, if need be.

The huge cylinders of the *Buckau*, he explained, were spun by a small engine,

ships had relegated sailing vessels into dim obscurity, immediately challenged international attention. Several authorities, including officials of a great steamship line, pronounced the invention the most startling maritime development since Fulton's steamboat. Others were more skeptical, asking how the *Buckau* would perform in a heavy sea, and are yet to be convinced of the value of the invention. They also pointed out that the most that can be claimed for the new ship is that it will apply to better advantage the power available for a ship supplied with sails. It cannot replace, in any case, the ship driven by steam or internal-combustion engines. In the United States most experts have adopted an attitude of "watchful waiting" with regard to the invention.

**T**HE scientific principle upon which Doctor Flettner based his invention has been known for nearly three-quarters of a century. Briefly, this is that a cylinder revolving in a current of wind will exert pressure at right angles to the current. This principle, known as the Magnus law, can be understood readily by any one who is familiar with baseball. The giant cylinders, or rotors, spinning in the wind, increase air pressure on one side and suction on the other, just as the surface of a rapidly

spinning baseball from the hand of a pitcher piles up a difference of pressure on its two sides that deflects the ball into a "curve." In the case of the baseball, of




The Amazing Sailless Rotor Ship at Its Wharf

A recent stern-view photograph of the *Buckau* at Kiel, Germany. The inventor, Anton Flettner, declares that the two towering, spinning cylinders produce 15 times as much power as does an equal surface of canvas

and these spinning surfaces, presented to the wind, provided a means of propulsion. This statement, after steamboats, oil-driven ships, and electrically operated



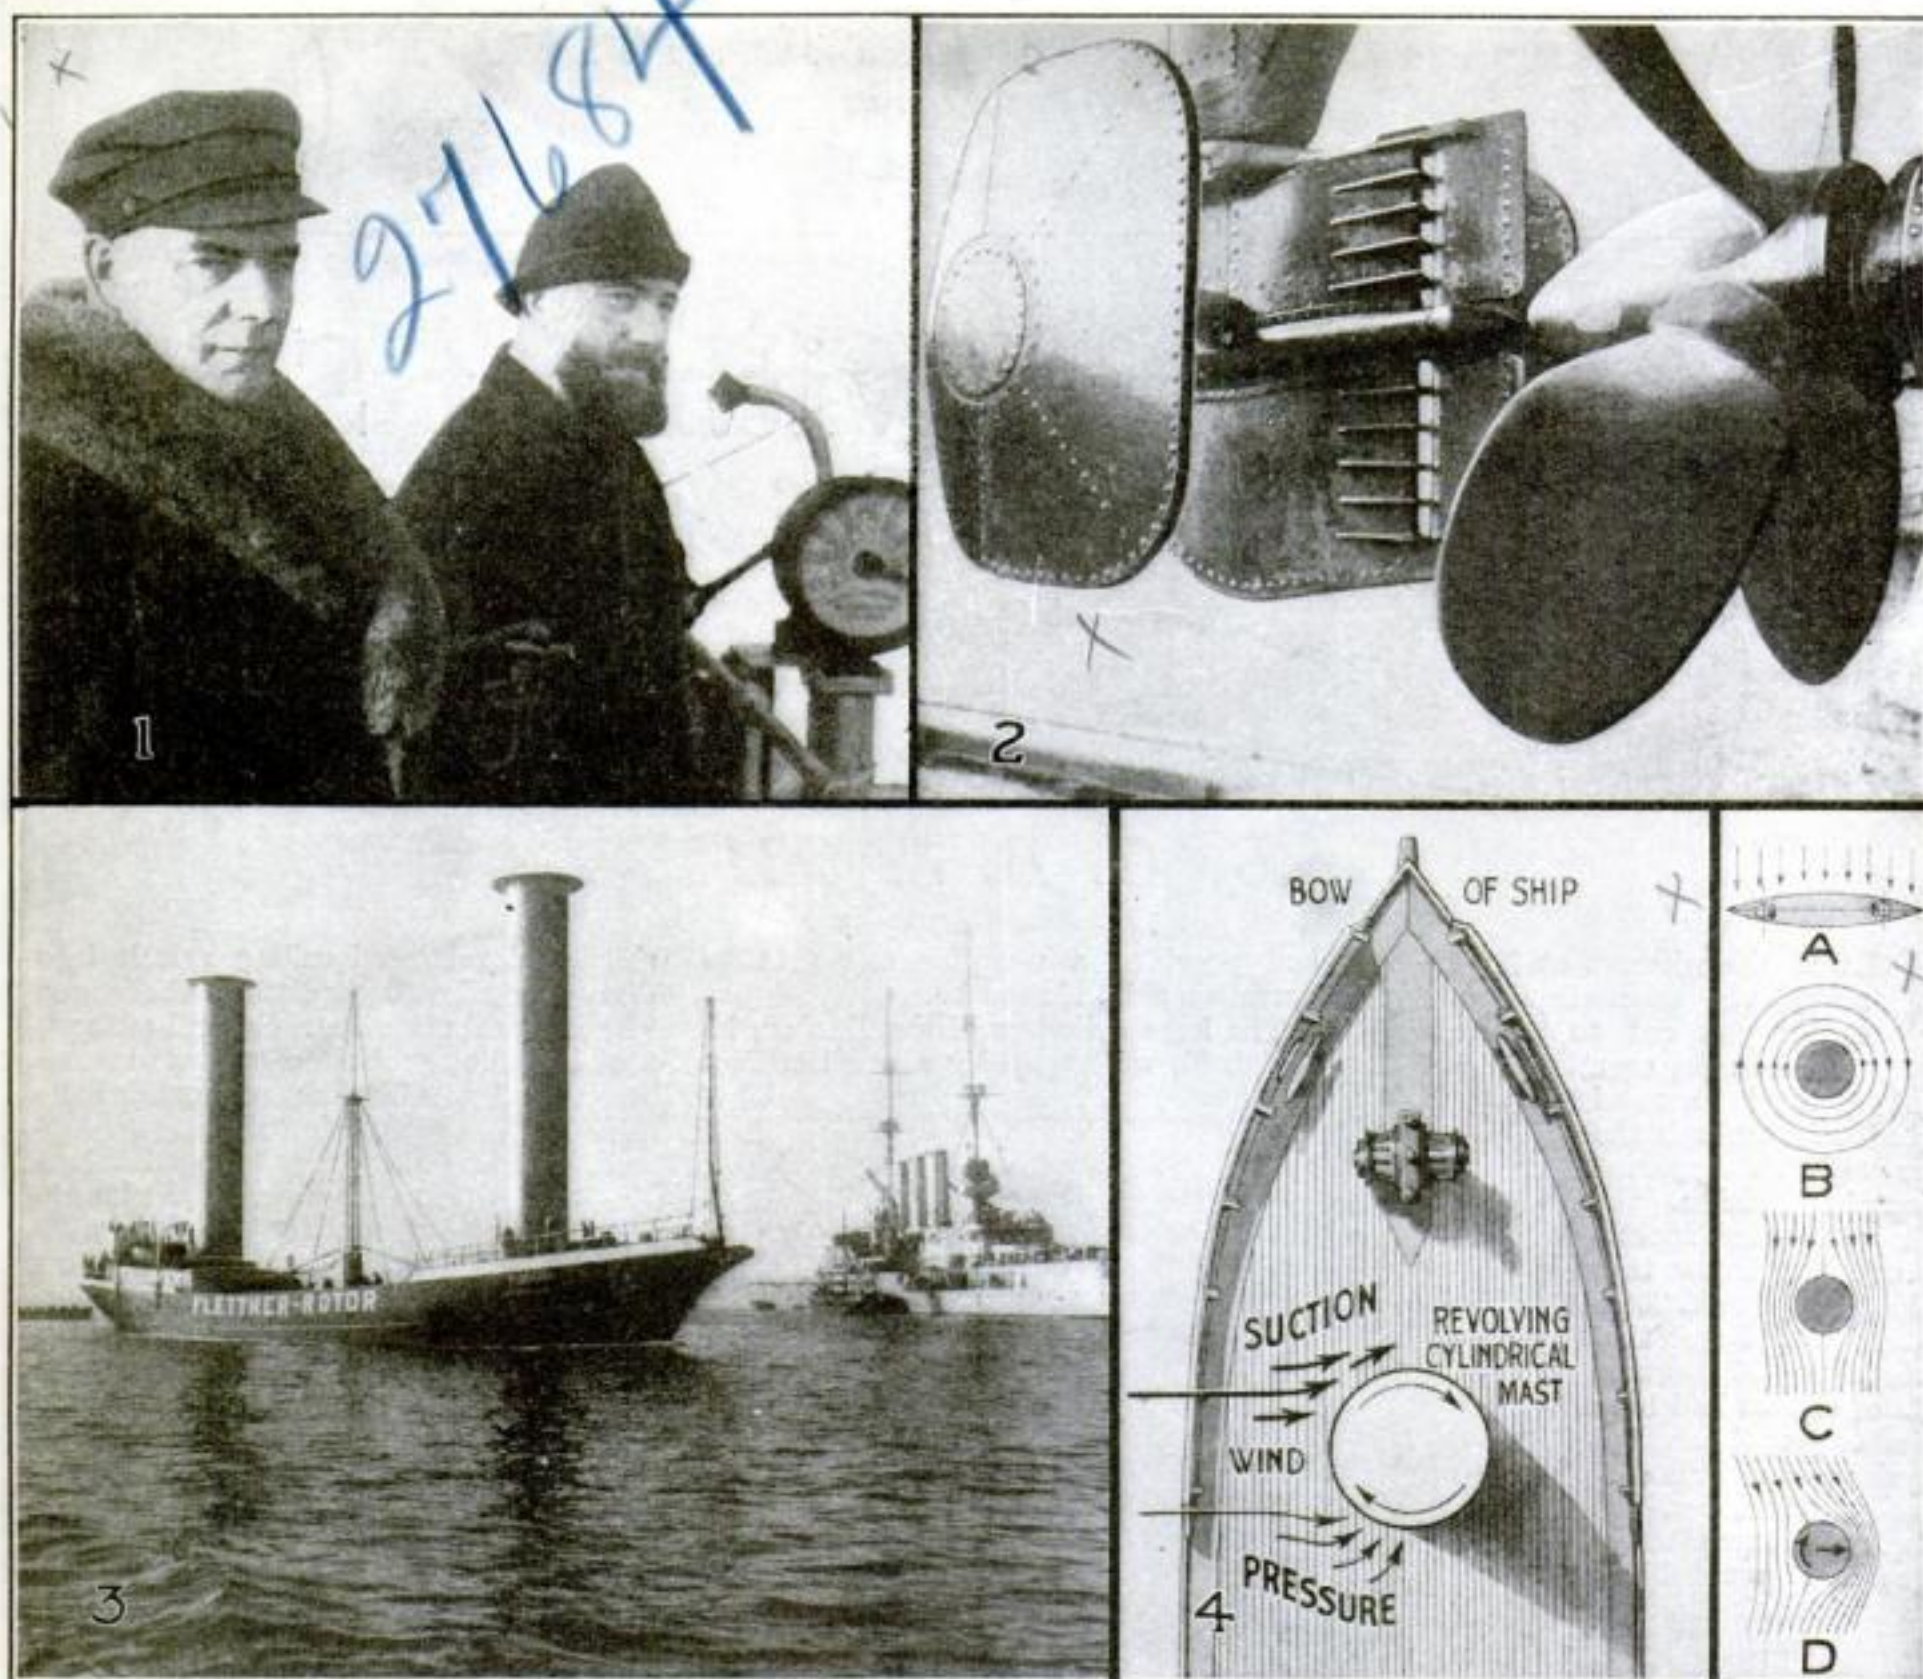

### A New Application of an Old Principle—the Rotor Ship and Its Inventor

1—Anton Flettner (left), inventor of the sailless ship, with Captain Gerhards, commander of the *Buckau*, on the bridge of the vessel at Hamburg Harbor, Germany. 2—The rudder and auxiliary propeller of the *Buckau*. The three-bladed rudder is said to enable the ship to be turned around in its own length. 3—Side view of the ship. Each of the towering cylinders is 60 feet high and nine feet in diameter. 4—Diagrams showing operation of the revolving cylindrical masts, or rotors, in propelling the ship. The smooth surface of the cylinder, spinning in the wind, sets up increased air pressure on one side and suction on the other, driving the ship normally

at right angles to the direction of the wind (see figure A). The lines in figure B indicate how air currents would be set up around the spinning cylinder, supposing there were no wind. Figure C, on the other hand, shows how the wind would pass around the cylinder, supposing it were not revolving. In neither case would there be any appreciable effect on the movement of the ship. But with the wind blowing and the cylinder spinning, the combined forces increase the pressure on one side and decrease it on the other, as in figure D, driving the ship forward in the direction indicated by the horizontal arrow within the shaded circle

course, the equivalent of wind is produced by the swift passage of the ball from pitcher to catcher.

Each of the two spinning towers on the *Buckau* rests on a fixed pivot and moves on ball bearings. The towers are built of sheet iron about one-half an inch thick, are 60 feet high and nine feet in diameter. Two electric motors of 10 horsepower each, placed inside the pivots, drive the towers. Current for the motors is generated by a Diesel engine. The total weight of the complete mechanism—towers, engine, and motors—is about 15,000 pounds, just one-fifth the weight of the discarded sails and rigging on the same ship.

In propelling a sailing boat, suction, rather than pressure, Flettner explains, is the important factor in producing motive power. His aim was to produce

artificially, by means of the revolving towers, a greater suction power than that produced on the vessel equipped with sails.

When wind strikes a sail, it divides equally, and in this division there results what is called a circular current. This works with the original current of wind on one side of the sail and against it on the other side. On the side where the current whirling around the sail is added to the original current, suction or pulling force is created, while on the other side the clashing of the two currents results in a pressure or pushing force. Of the two forces, suction is the greater factor in making the boat move forward.

The revolving cylinders on the sailless boat impel it on exactly the same principle as sails do, but more effectively, it is claimed, because a greater suction power

is produced. As the wind hits one of the rotating towers from the side, one side of the cylindrical surface naturally is moving with the wind, and the other is going against it. There is very little friction on the side where the surface goes with the wind, and much friction on the other side.

The wind chooses the easier pathway, avoiding the side producing friction, and most of it goes in the direction in which the cylinder originally was traveling. Because the moving cylinder offers less resistance than a rigid sail, the wind, whirling around the cylinder, produces a much greater circular current than is created around a sail. Thus the suction is greatly increased, the inventor asserts, and the boat moves more swiftly than one with sails.

(Continued on page 147)



# Henry Ford Says, *as he turns out a car every twelve seconds:* "There Is Always Room for More"

A surprising solution of traffic congestion as depicted by the maker of more than 10,000,000 automobiles—What Ford thinks about the future of "flivver" airplanes—How he directs the world's most amazing industry without an office

*By Raymond J. Brown*

A SHORT time after Dr. Hugo Eckener had piloted the ZR-3 (Los Angeles) across the Atlantic, and had seen it stowed safely away in its hangar at Lakehurst, N. J., he visited the plants of the Ford Motor Company near Detroit, Mich.

While he chatted with Henry Ford there, the conversation naturally enough veered around to aviation.

"I've never made a flight in an airplane," Mr. Ford said, "and I don't know that I'm particularly anxious to. I would, though, like to take a trip in a dirigible. Bring one out here some time, won't you, Doctor Eckener, and give me a ride?"

"I should be glad to, Mr. Ford," replied the other; "but it would be impossible to make a landing—you have no mooring-mast."

"That's right," nodded Mr. Ford reflectively; "we haven't." He turned instantly to one of his engineers who happened to be present. "You might get in touch with the Navy Department tomorrow," he suggested, "and get the specifications for a mooring-mast. We ought to have one here."

The mooring-mast is now being erected on the airplane landing-field near the Ford Experimental Laboratory at Dearborn.

I mention this incident because it illustrates aptly, I think, not only Henry Ford's characteristic way of doing things, but also a phase of his vast enterprises that probably is not clear in the popular mind.

THE building of that mooring-mast is not an expression of a sudden whim of Henry Ford. His wish to make a flight in a dirigible—probably uttered only half seriously—is only remotely connected with the erection of the mast, which is being put up because it has a definite, specific use to serve in the Ford organization. Dirigibles are driven by motors, and the production of motors and their development is the prime purpose of the Ford Motor Company.

In other words, Henry Ford is only incidentally a manufacturer of automobiles; his real business is the manufacture of motors. That the principal business of his company now is placing motors in automobiles is explained entirely by the fact that it is in automobiles that the motor finds its widest present-day use. Some day motors may be required in great numbers for other purposes. For that day the Ford organization even now is preparing.


That is why a mooring-mast for dirigibles is being erected at Dearborn. That is why there is already an airplane landing-field there. That is why you'll find in the Ford Experimental Laboratory an all-metal speed boat, equipped with a 1000-horsepower motor, and like no other boat in the world. That is why, all about this boat, you will find automobiles, motors, and motor parts of many types and makes, constantly being studied and tested. That is why Henry Ford has placed on the Great Lakes two motor-driven freighters that are among the largest boats that ply the waters. That is why in the offices of the experimental laboratory—the closest thing to a headquarters that Henry Ford himself has—you will find virtually nothing that is not directly connected with motors—models of motors, plans of motors, sectional drawings of motors, maps showing the location of the Ford iron mines, the Ford coal mines, the Ford forests, whence are taken the raw materials from which are to be fashioned—motors.

THE Ford Motor Company has set out to know and understand what the motor will do under all circumstances, under every conceivable condition of use; to learn, in short, what must be done to make the perfect motor for any purpose for which mankind will require it. Everything else in the almost unbelievably vast Ford organization is secondary.

The ubiquitous Ford car is only a single form in which the idea behind the Ford enterprises takes expression. The immense volume of business done by the Ford Motor Company every year and the enormous profits resulting therefrom are,

## The First and the Ten Millionth

Here is Henry Ford, the worker of marvels, standing between the first "horseless carriage" that he manufactured in 1893, and his 10 millionth automobile, turned out of his factories a few months ago

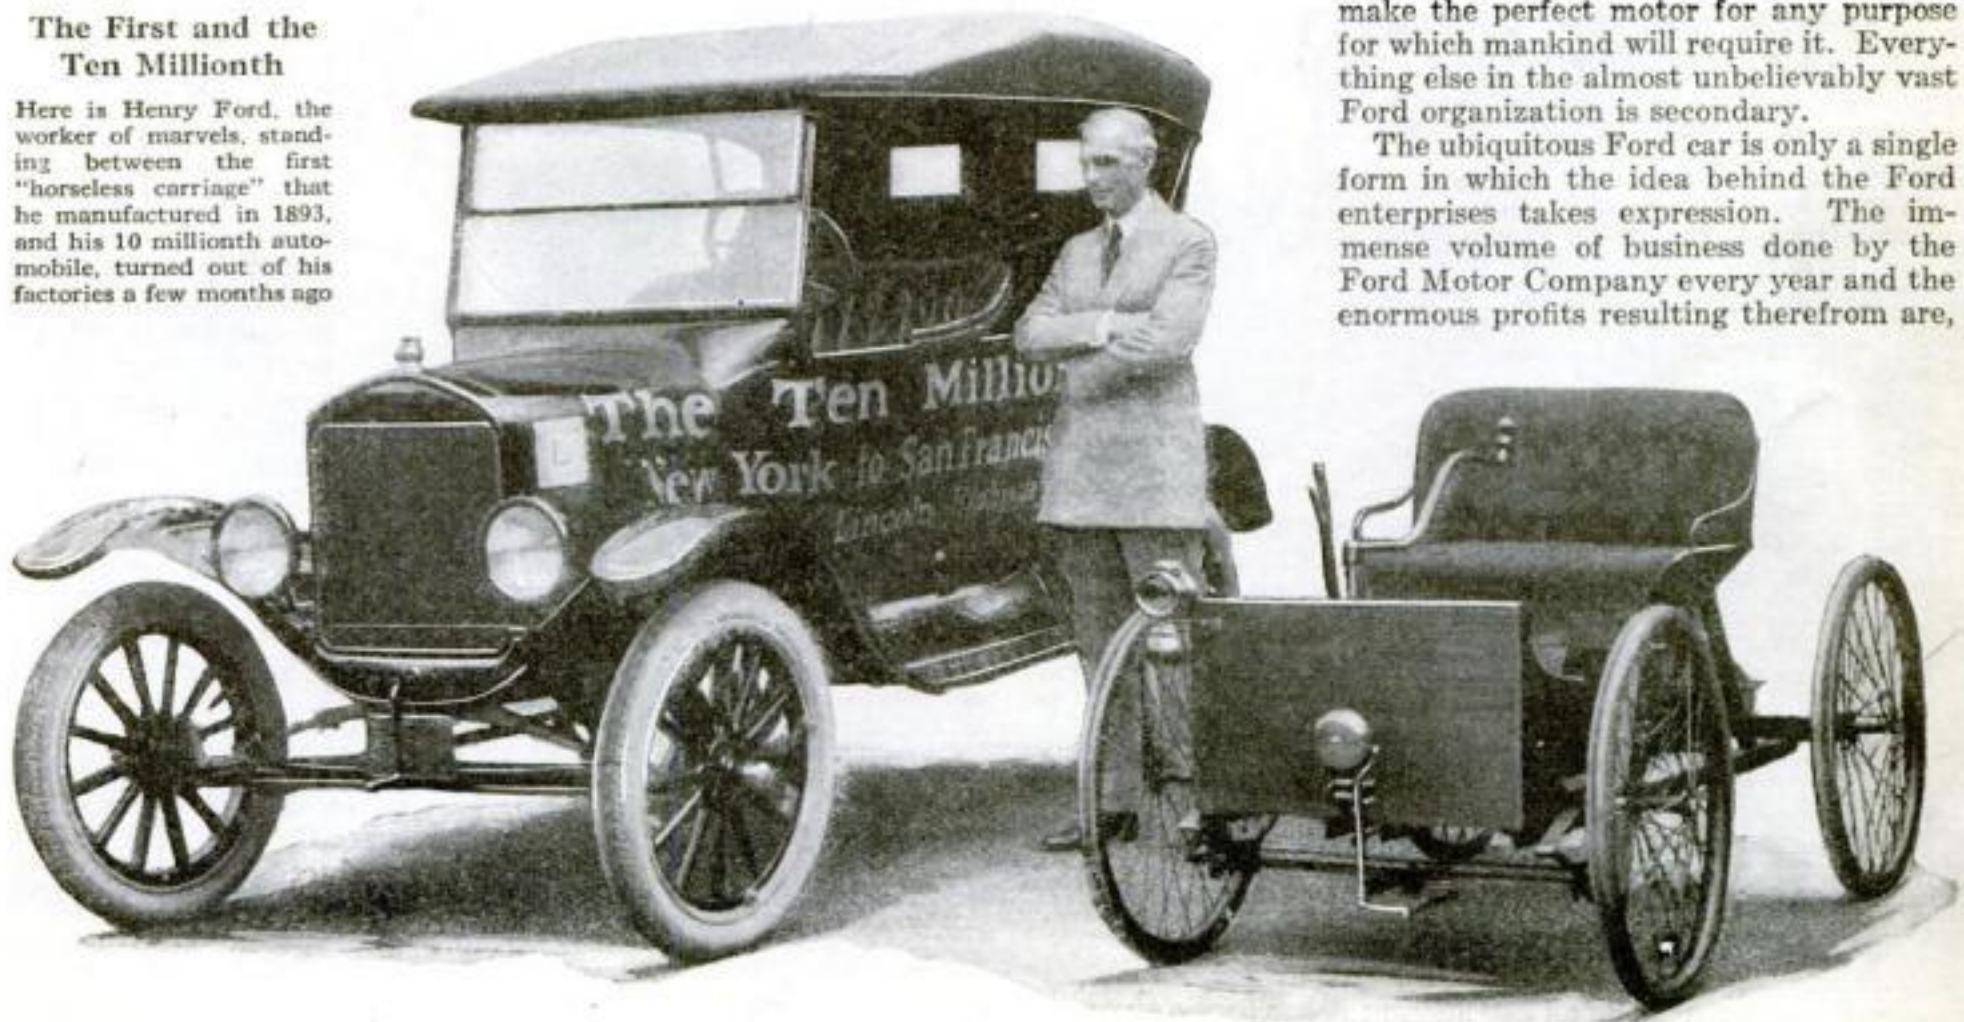



in a sense, only by-products of the effort that more than 150,000 Ford employees all over the world are making to perfect the motor. Henry Ford himself made that statement to me recently at Dearborn.

**I**NTO that effort is poured a wealth of natural resources—mine products, forest products, farm products—a wealth of technical skill, and the accumulated results of the labor of many men in many diverse branches of science. These and the factories, railroad, and shipping lines, assembly plants and sales agencies, offices and laboratories, all the great enterprises that are necessary to the operation of the Ford Motor Company, Henry Ford has welded into an organization that stretches to the ends of the earth, and yet remains compact, mobile; a marvel and a miracle of efficiency.

Coal and iron from the Ford mines in Kentucky, West Virginia, and Michigan, and timber from the Ford forests on the upper Michigan peninsula, are rushed in Ford ships and over the Ford railroad (the D. T. & I.) literally to be hurled into the indescribably huge Ford plants about Detroit, where they are transformed with bewildering speed into finished motor cars and tractors that move away under their own power, or into motor-car parts boxed for shipment to the assembly plants in this country and abroad.

It may give you a notion of the celerity with which things are accomplished in these Detroit plants when I say that 80 minutes after a cylinder-block casting from the Ford foundry at River Rouge—the world's largest, by the way, where 1900 tons of iron are poured a day—enters the world-famous "Ford factory" at Highland Park, it is in a freight car, a complete automobile power plant, tested and passed, ready to be made part of a chassis and driven away. As a stunt, for the entertainment of the Prince of Wales when he visited the Ford plants recently, a Ford car was completely assembled in 26 minutes!

Such things are made possible only by the magic of efficiency and organization, exemplified here in three ways:

First, each man—and there are about 100,000 who work in the Ford plants at Detroit—has one job to do and no more. It may be only inserting and tightening a single bolt in a cylinder head, or it may be giving the final inspection to a finished car. He does that one job, and no other; his neighbor's job is none of his concern, nor does he attempt to make it any.

Second, by an amazing and bewildering

system of conveyors, each man's work is brought to him, remains with him just long enough for him to complete it, and then is carried on to the man who performs the next step in the manufacturing process. Some jobs, of course, take more time than others, but the movements of the conveyors synchronize perfectly with the movements of the worker, who is never hurried and never left idle; his work is always before him when he is ready for it, away from him when he has finished it.

The third phase of the system is the practice of completing each individual operation of manufacture in one place—making each Ford plant in effect a great number of little factories. Thus, if a part had to be cut to size, machined, painted, tipped with wood, covered with leather and crated for shipment, the various operations would not be performed in a central machine-shop, a central wood-working shop, and so on. The unit making the part would have its own machine-shop, its own paint-shop, its own boxing department. The time and labor saved by such methods, the waste and lost motion that they eliminate explain in large measure why every day there issues from the Highland Park plant in finished cars and parts the equivalent of 7000 automobiles—one every 12 seconds or so.

Probably a picture of the immensity of the results achieved by the Ford organization can be given in no better way than

almost 25 times the total available electric power of the United States!

And this he has done by means of a machine, which, pound for pound, is produced more cheaply than any other similar machine in the world. A Ford touring-car costs 20 cents a pound, finished, while a bicycle costs about a dollar, a locomotive something between 50 cents and a dollar.

**W**HICH leads, naturally enough, to a consideration of another amazing phase of the Ford way of doing things. At least three times Henry Ford has made the price of Ford cars exactly the cost of producing them. And on this basis he has sold them at a profit! Impossible? Not at all, for the profit came, not through some clever scheme of financing, but through wider application of new discoveries of science to manufacturing methods.

Examples of the way applied science has contributed to the lowering of Ford manufacturing costs with consequent benefit to the consumer are to be seen in every corner of the Ford factories; nowhere, though, on such a gigantic scale as in the marvelous plant at River Rouge, Mich., where are taken the first steps in making the products of nature into moving, useful motors.


I am exaggerating only slightly, for example, when I say that from the towering chimneys of this huge unit in the Ford scheme there issues no smoke. Ten thousand tons of coal are burned here every 24 hours, yet there is no smoke. Why? Because certain constituents of the

coal, which ordinarily are wasted in industrial furnaces and pour forth from the chimneys as smoke, here are transformed into a variety of useful products to be used at the plant or sold outside.

There are, for instance, 55,000 pounds of ammonium sulphate, a valuable fertilizer, produced here daily; 17,000 gallons of benzol, an efficient motor fuel; 22,000 gallons of tar, useful in road construction or for other purposes; 12,000,000 cubic feet of gas, of which 2,000,000 are sold to the City of Detroit; light oil also—all products derived from what is usually the waste of coal, and without harming the efficiency of the coal as

fuel, for there remains carbon in the form of coke to be used in the blast furnaces and sold to employees that their domestic fuel bills may be reduced.

Carbon-monoxide gas, waste product of the blast furnaces, is piped to the power house, to be burned with the pulverized coal used there, with a consequent in-

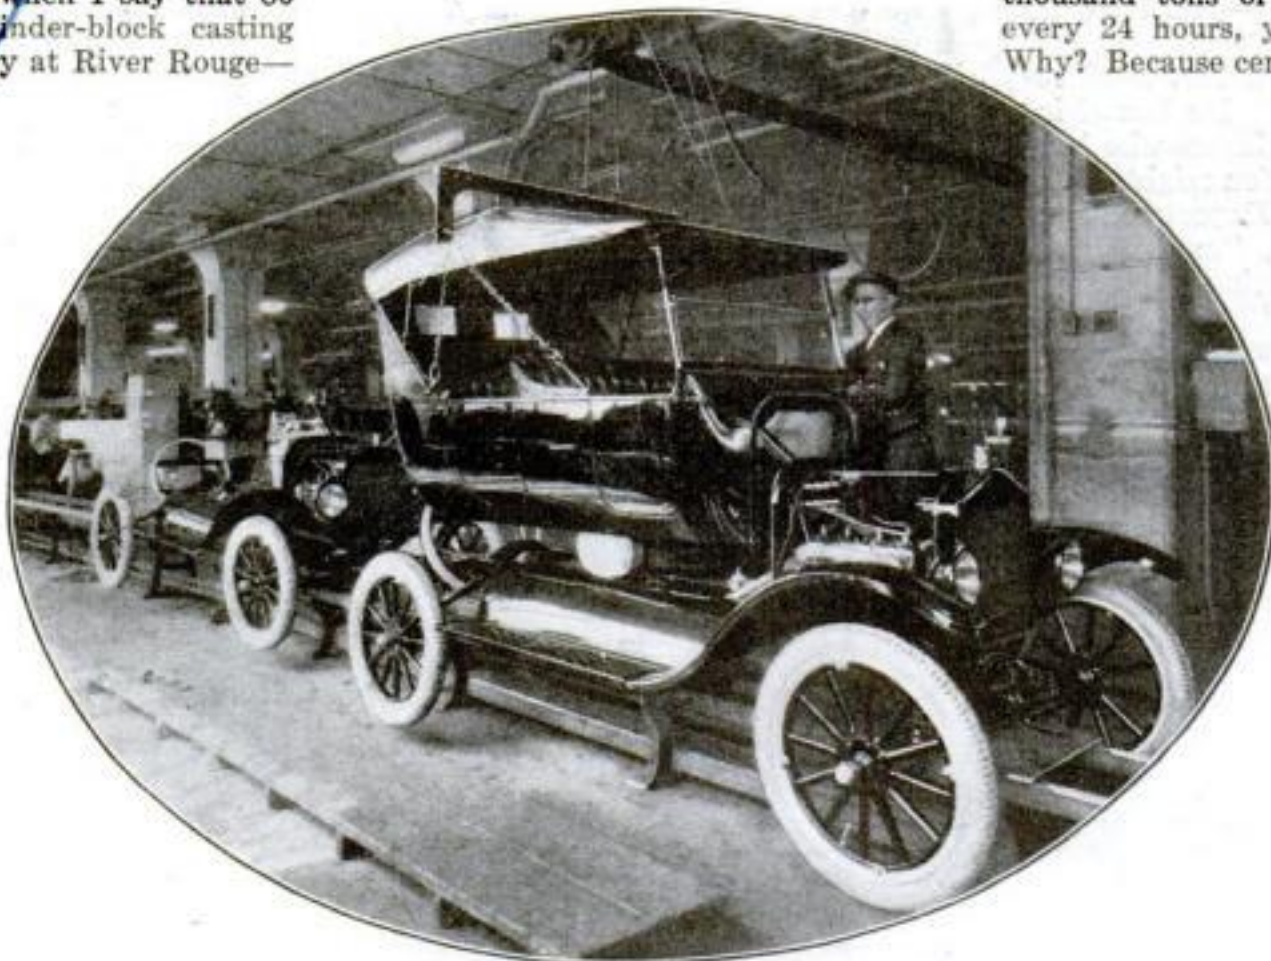

**The Last Step in Making a Ford Car—Fitting the Body**

Each of the 100,000 men who work in the Ford plants at Detroit has just one definite job to do, whether it be tightening a bolt in a cylinder head or giving the final inspection to a completed car. By an amazing system of conveyors, each car passes from one man to

the next in the process of manufacture, the movements of the conveyors synchronizing perfectly with the movements of the workers. For the entertainment of the Prince of Wales not long ago, a Ford car was completely assembled by this system in 26 minutes!

by a comparison. When, about six months ago, Henry Ford turned out his 10 millionth automobile, he had made available for the world a total of about 220,000,000 horsepower, or 76 times the potential power of Niagara Falls; 10 times the total hydroelectric power that has been developed throughout the world;




crease in the thermal efficiency of the latter. About 250 tons of coal are burned here every day to produce 60,000 kilowatts in electric power; and only from three to five wheelbarrows of ashes result!

The firing-room in this plant is as clean as the operating-room in a hospital, and the firemen and other operators dress in suits of spotless white and keep them so.


So, of course, the cement mill was kept clean thenceforth. Everything that Henry Ford wishes done is done in just that way in the Ford organization, for he is not merely the founder of the Ford Motor Company and its nominal head, but the actual, active director of all its varying activities, its mainspring, the source of virtually all the ideas, innovations, and spectacular accomplishments that have

these happen to supply the most convenient rest. Rarely does he issue an order as an order. He merely talks the thing over with one of his lieutenants in the calmest, most detached manner imaginable. Eventually the other grasps the idea in full detail; then it is put into effect, automatically almost. It may be a matter of manufacturing or merchandising policy that involves millions of dol-

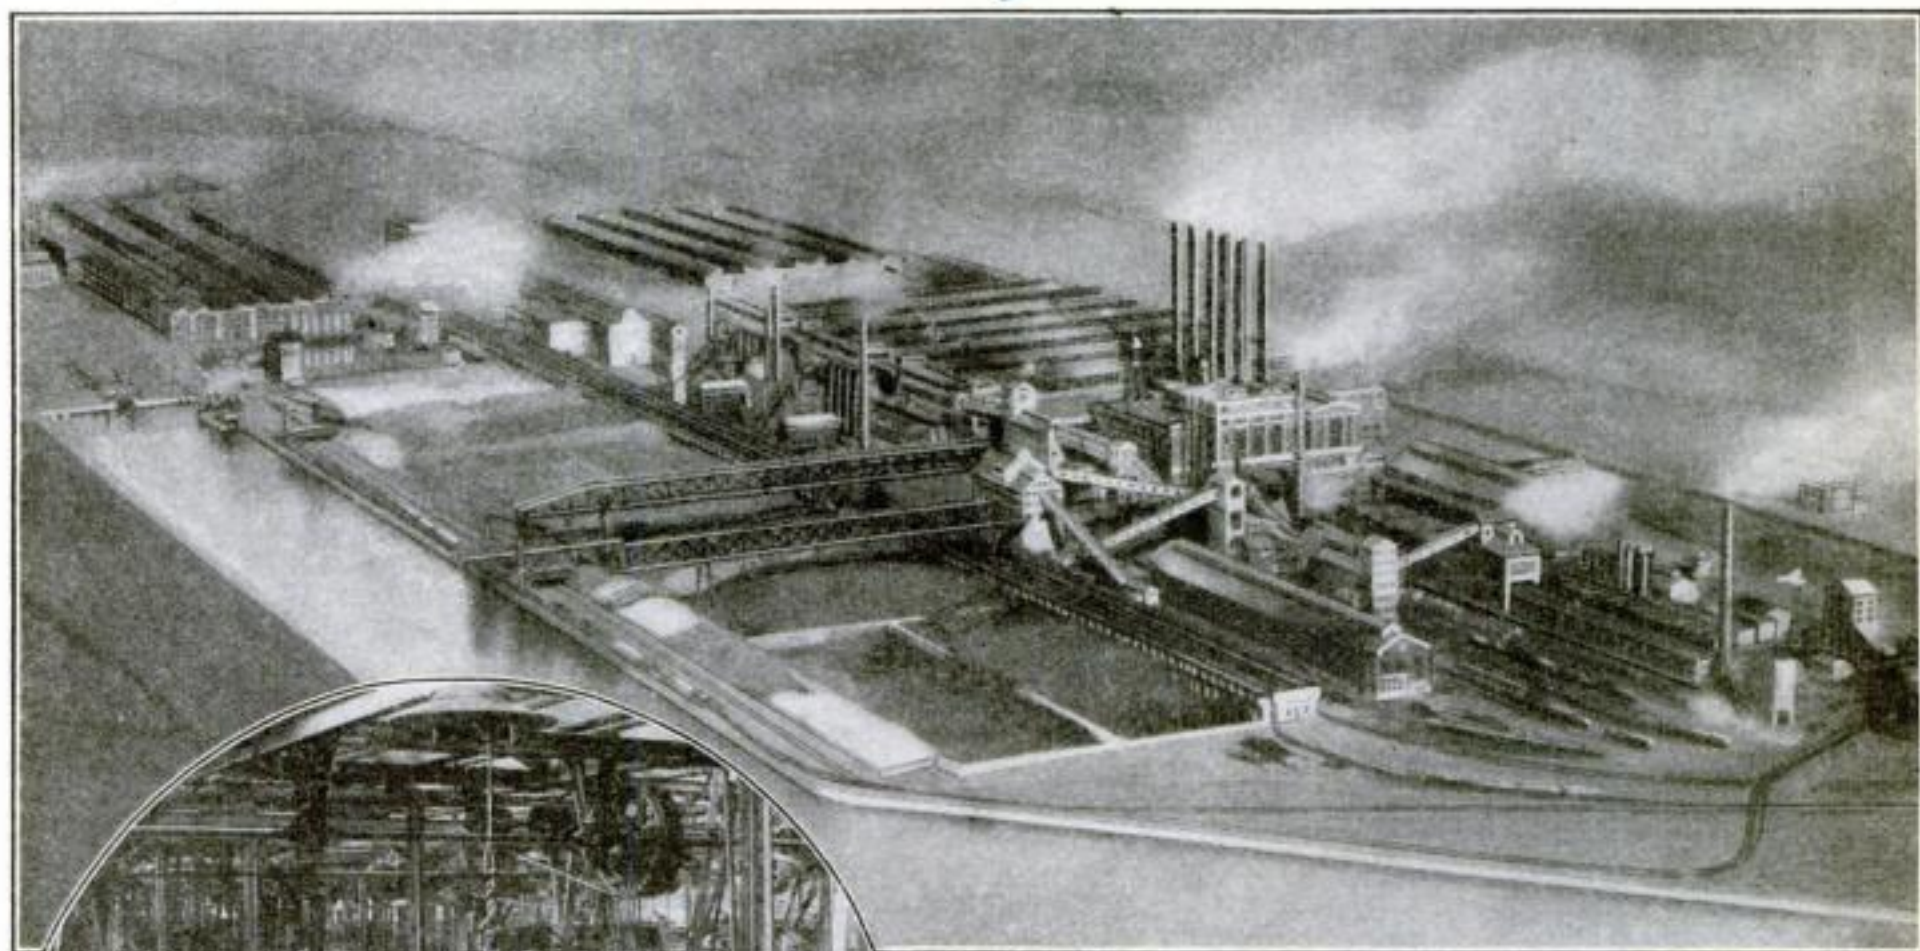

**Ford Plant at River Rouge—the World's Largest**

In this vast plant, occupying 1100 acres, and containing 100 miles of railway track within its boundaries, the metal from the Ford mines is turned as if by magic into automobile parts. Here 1900 tons of metal are melted, molded, and machined in a day. Here, too, all of the Ford tractors are manufactured. The equipment is sufficient to turn out 12,000 motor blocks a day. Projected expansions will give the electric power plant a capacity of 350,000 horsepower.

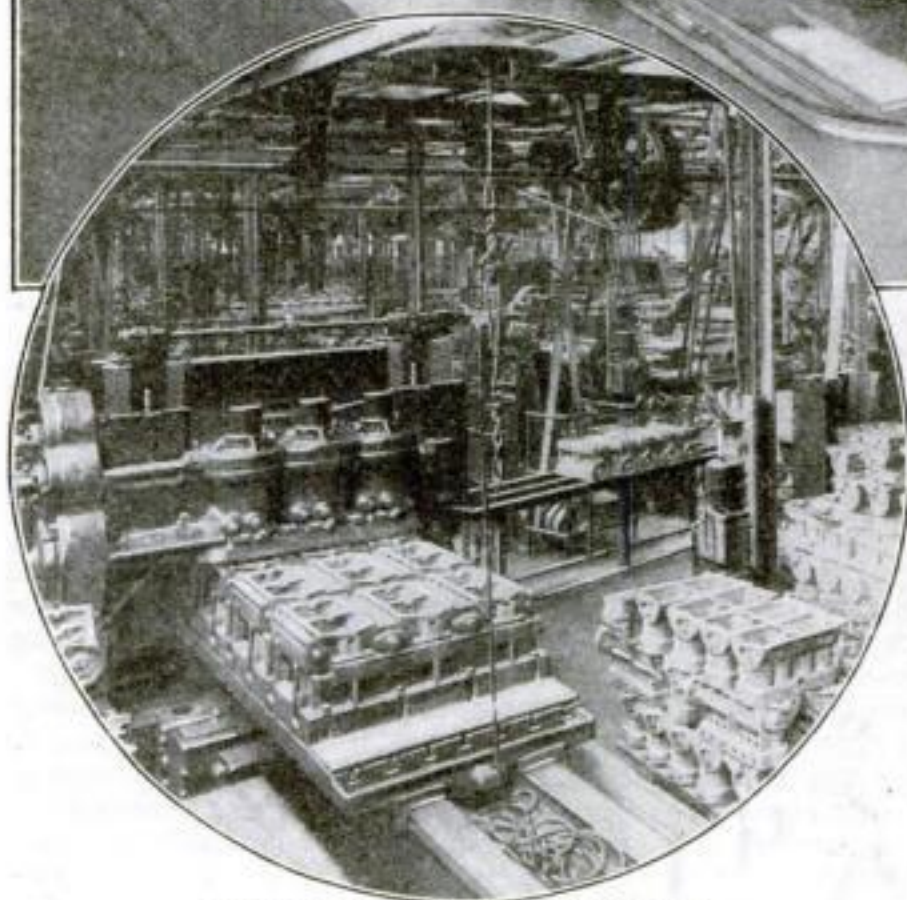

**From Castings to Auto Engines**

Eighty minutes after a cylinder-block casting from the foundry at River Rouge enters the famous Ford factory at Highland Park, Detroit, it is converted into a complete power plant, tested and passed, ready to be made part of a chassis and driven away. This view in the Highland Park plant shows the machinery that handles castings. These must be exactly alike in order to fit any Ford car

made the company remarkable since its inception.

In fact, the most amazing thing about the more than amazing Ford Motor Company undoubtedly is Henry Ford himself.

Here is a man, head of one of the vastest manufacturing enterprises ever launched, generally believed to be the richest man in the world; possibly the richest man of all

lars; that is his usual method of putting it into force.

Perhaps it may strike you as anomalous that the man who is at the head of such a marvelous example of system and efficiency, where each man and each machine has only a single, definite task to perform, should himself apparently be so unsystematic that he does not even keep office hours.

**AS TO** that, let us see. In tying himself down to no settled routine, in appointing no definite place where he may be found at stated hours, Henry Ford is merely carrying out with regard to himself the same principles of efficiency that are in force in his factories. There, remember, each man has one job, and no more.

Henry Ford, too, has one job and no more—to manage, direct, and operate the Ford Motor Company. To accomplish his job he cannot remain in one place; he must "circulate." That is his own word; he has used it frequently in describing the functions of an executive.

He does not believe that executives should have headquarters to which the men under them may bring their problems for solution. He believes rather that executives should move about among the men, where they can be on hand when a problem arises. Consequently, all executives in the Ford plants "circulate"—

(Continued on page 149)

**T**HERE is a cement mill, too, where the slag from the iron ore—wasted ordinarily—is utilized in the manufacture of 3500 barrels of cement a day. If you know of the dust and dirt that usually accompany the manufacture of cement, you will be astonished at this mill, for everything about it is as clean, almost, as the firing-room just spoken of.

There was a time when it was not, however. That was when the mill was new—before Henry Ford had seen it in operation. After his first inspection, though, he did something that was quite unusual for him—he issued the following peremptory order:

"If that cement mill can't be kept clean," he said in effect, "close it up!"

time; yet he has no office—none that he occupies regularly, at any rate. When he requires a desk to work at, he goes to his experimental laboratory at Dearborn, one of the least pretentious of his plants, and sits down at any desk, any table, or any drafting-board that happens to be unoccupied. If there is no desk or table available, he is content to sit down where he can and use his knees for a desk. They tell me that he perched himself on a radiator recently while he chatted with the Prince of Wales.

He dictates and signs his letters and checks "on the fly," wherever they happen to be brought to him—against a brick wall, the hood of an automobile, or the stator of an electric generator, if any of



How a telephone subscriber hears a message received in his absence by the automatic recording machine. A cylinder record takes the message of the caller, after another record has informed him the subscriber is absent



By Truman Stevens

**A** RECENTLY invented machine performs in a way that is positively uncanny a variety of tasks ordinarily accomplished only by human hands and brains.

It will take dictation like a stenographer. It will serve as secretary of a meeting or office conference. It will answer the telephone in the absence of the subscriber, report his absence to the caller, and take a message that it will repeat to the subscriber on his return. It will record perfectly a telephone conversation from both ends, no matter how far separated.

It can be used as a dictograph in crim-

inal or other investigations. It can be hooked up to a radio receiver so that it will record automatically stock-market quotations or similar broadcast messages at the proper time. It can be put to any or all of these uses, or to any others that the ingenuity or necessity of the user may warrant, without change of mechanism.

In appearance this amazing apparatus resembles somewhat an old-time phonograph, employing cylindrical records, or the ordinary dictating machine to be found in many offices. Like both of these devices, the new machine records conversations on a wax cylindrical record. Unlike them, however, the recording is accomplished not mechanically, but electrically, the sound vi-

brations of the voice being transformed into electrical currents in a sort of miniature radio transmitter, containing a vacuum tube and a complicated series of inductances.

These messages then are imprinted on the record, and are reproduced for the hearer by the usual phonographic process. Through the electrical system of recording an excellent quality of reproduction is attained, the listener hearing the true inflection and tones of the speaker's voice. Also it permits the use of a supersensitive microphone, which enables the user to give dictation in an ordinary conversational tone from 20 feet or more away, and also causes the machine, when it is used for that purpose, to record every

word of a conversation in which several persons are taking part, no matter in what parts of a room they are situated.

By means of auxiliary apparatus a magazine of records may be installed in the machine so that when the end of one is reached, the next automatically starts recording, thus permitting dictation to be given or conversation of any sort to be recorded indefinitely. Each record may be shaved about 80 times before it becomes too thin to be used further.

The device may be operated for any of its many uses by either electric-lighting current or by a storage battery or dry cells, like a radio set.

**W**HEN the device is employed as a telephone operator, a message suitable for transmission to telephone callers during the absence of the subscriber is imprinted on a small auxiliary record at the left of the large wax cylinder. When a caller obtains the subscriber's number, in the absence of the latter, this little record is set in motion by the current operating the telephone bell, and the caller hears something to the following effect:

"This is the office of Smith & Co. There is no one here at present, but you may leave a message, or you may call again at 2.30 if you prefer."

Immediately after the delivery of this message, the machine is ready to record any message the caller may desire to give.

Used as the recorder of a telephone conversation, the machine starts working automatically the instant the call is put through, and imprints on the record every word uttered by either party. Brokers and others to whom repudiation of a telephoned order by a customer might mean a large financial loss, would find permanent records of their conversations of especial value.

## WHY I READ POPULAR SCIENCE MONTHLY

### A Prize Contest Announcement

**"U**NTIL I found POPULAR SCIENCE MONTHLY, I rarely knew what to do with my evenings," a reader recently wrote. "I was just plain bored.

"But now, with a pipe, a pair of slippers, and POPULAR SCIENCE, I have 30 evenings of freedom from monotony at my command every month. Your magazine interests me, inspires me, and gives me a lot of valuable information. It arouses my curiosity and keeps my spirit adventurous, bucks me up when I am blue, and gives me the urge to do new and unusual things. I couldn't get along without reading it."

Thousands of such enthusiastic tributes have been received by POPULAR SCIENCE MONTHLY from its readers. Few, however, have condensed their appreciation into such a short letter. Why don't you try it?

What do you like most about the magazine? What features hit you hardest? Why do you like them? How has the magazine helped you? Point out, if you wish, specific short-cuts and ideas in this or in any other number you have made use of. You may base your letter upon the contents of this issue or on the many numbers


you have read and remembered.

For the best letter of not more than 250 words, we offer the following prizes: \$10, first prize; \$5, second prize, and \$1 each for the 10 next best letters. Competition closes March 10. Announcement of the prize-winners will appear in the June issue. A Board of Editors will be judges of the contest.

Contributions to this contest cannot be returned unless accompanied by a self-addressed, stamped envelope.

Address The Editor, POPULAR SCIENCE MONTHLY, 250 Fourth Avenue, New York City.



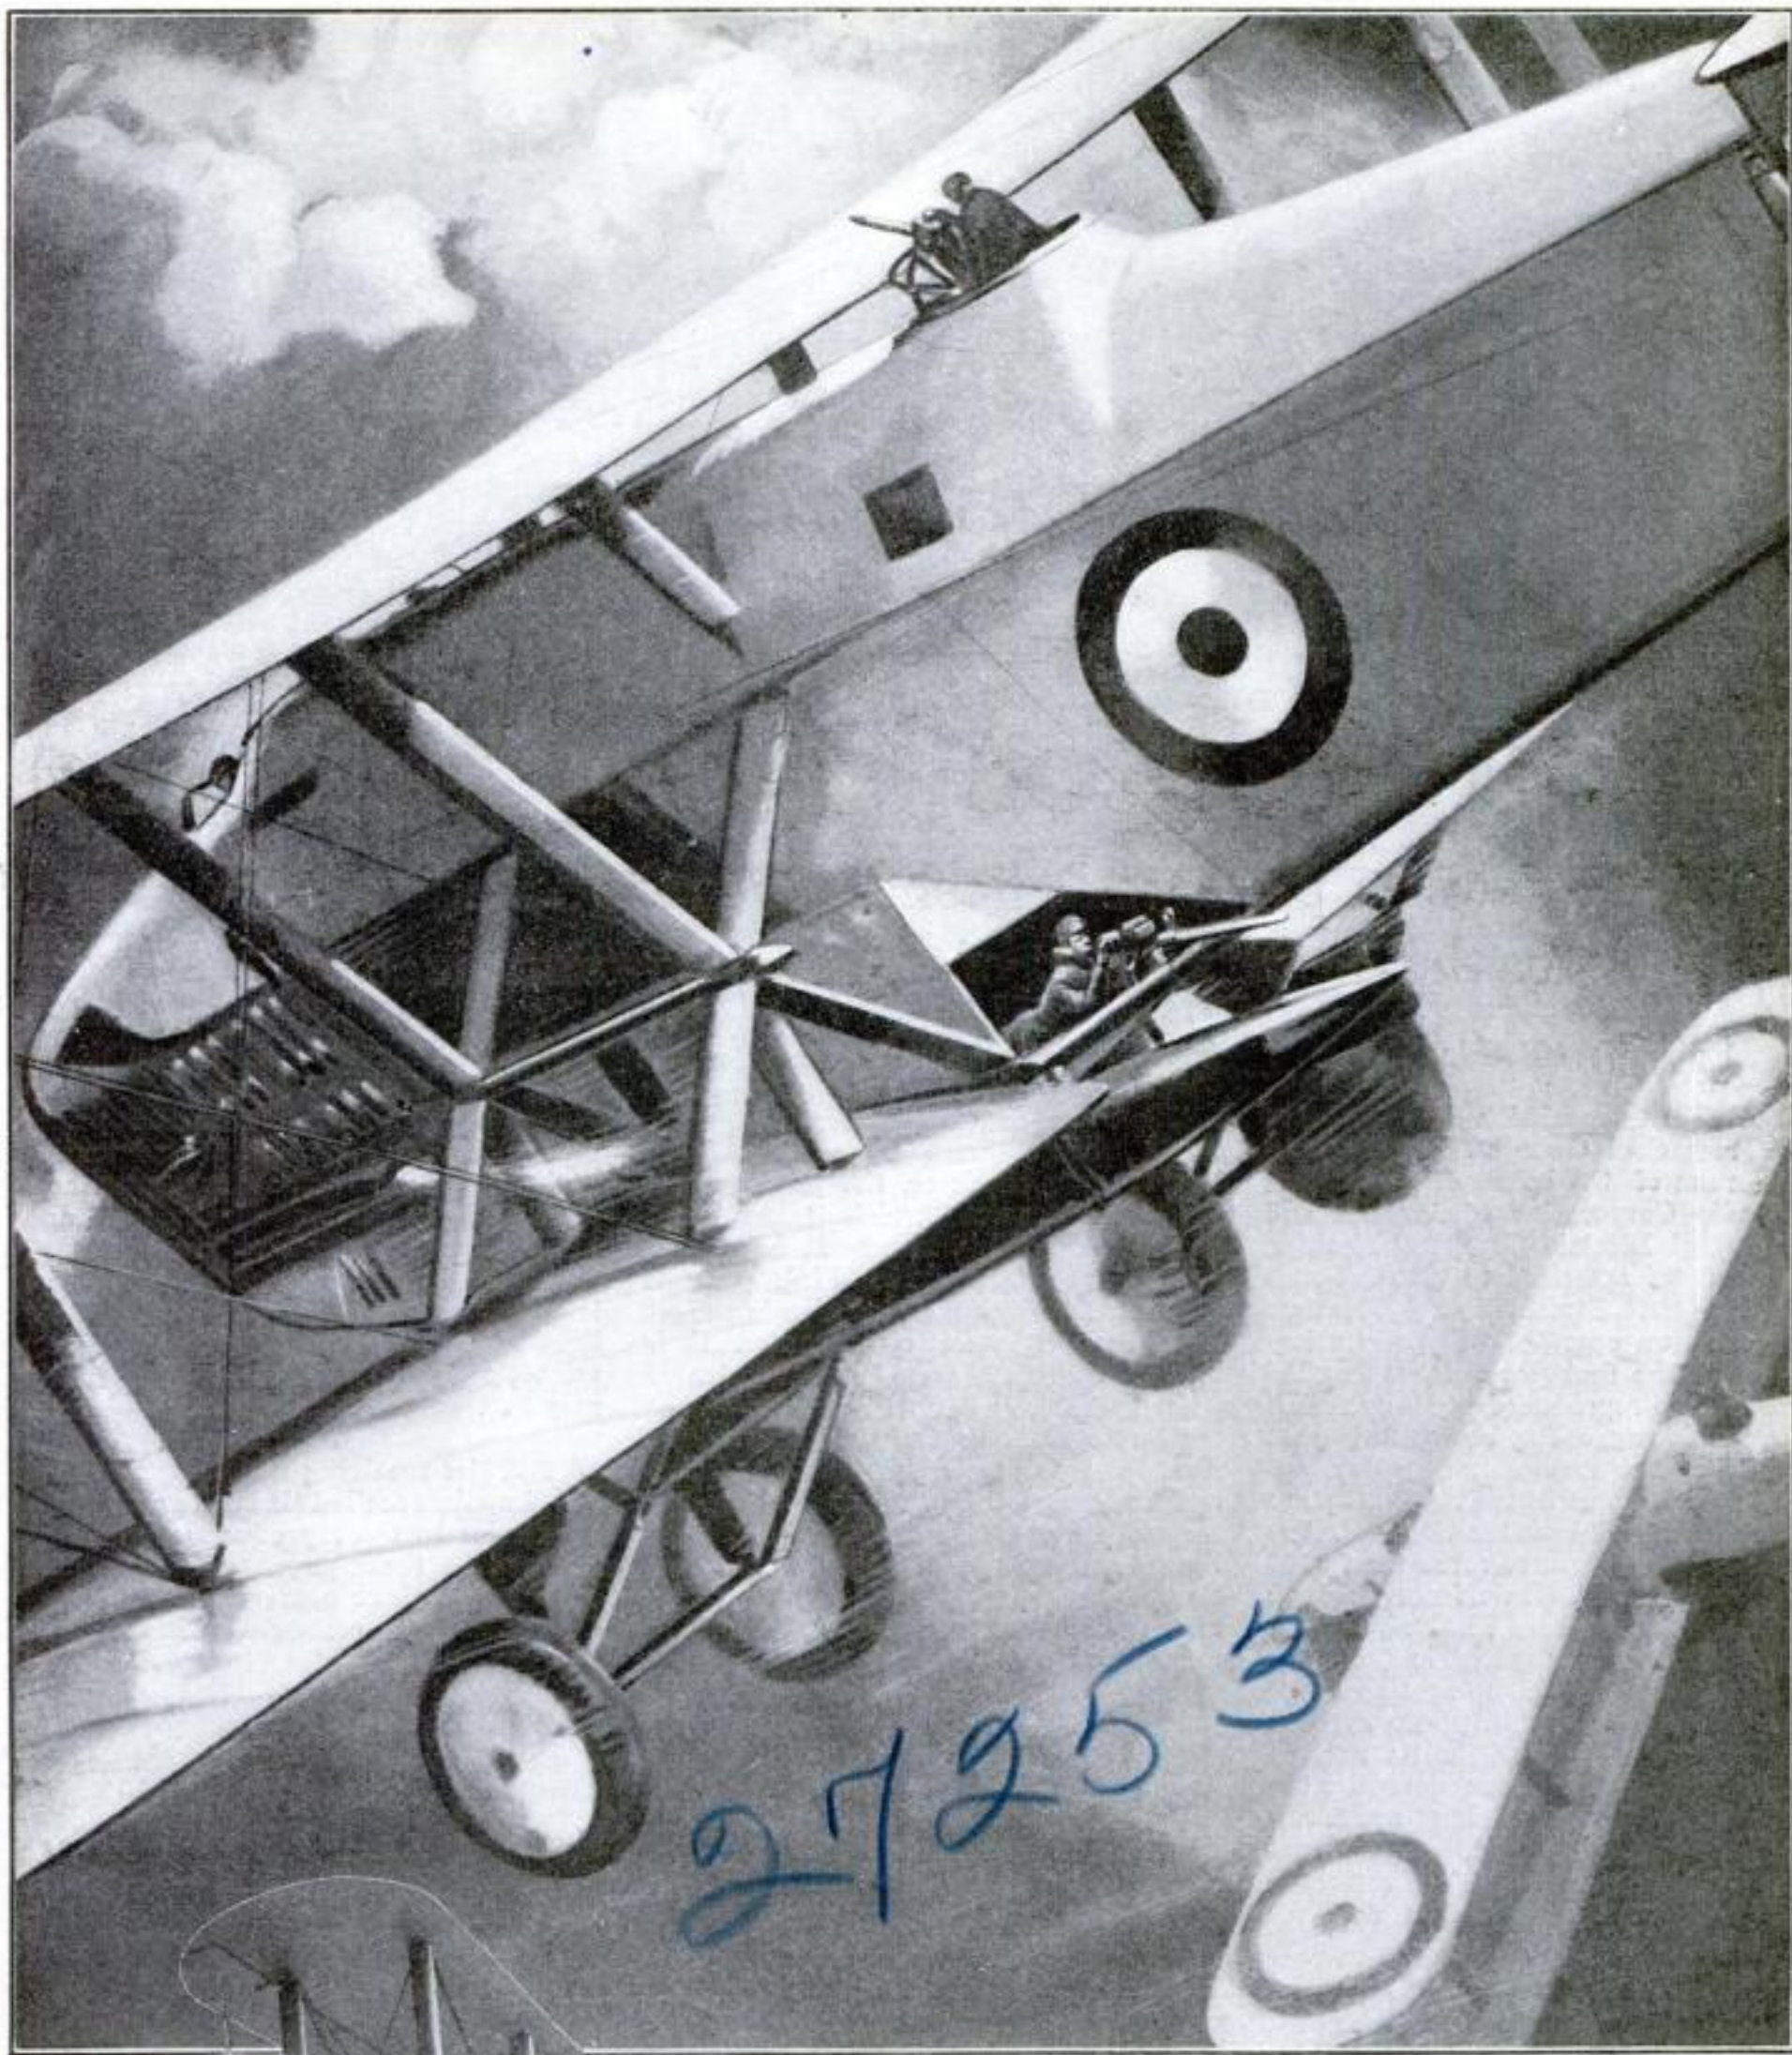

## Sky Superdreadnaught to Guard England

superdreadnaught of the air—a deadly new coast-defense aircraft, said to be the largest single-engine airplane in the world.

This mammoth machine, known as the "Cubaroo" Blackburn-Napier, recently completed a successful test flight near Hull, England. Driven by a huge 16-cylinder Napier motor of 1000 horsepower, it can carry and launch from the air at a battleship a full-sized naval torpedo


weighing 1000 pounds. Its armament also includes great armor-piercing bombs, as well as machine guns for repelling air attacks.

Our artist has pictured above how this tremendous fighting machine might appear in action. The small photograph shows its vast size compared with a group of men who have found shelter beneath its enormous wing.

The plane is 54 feet long, 20 feet high, and its wing span is 88 feet.

**W**HILE America's new sky leviathans, the *Los Angeles* and the *Shenandoah*, have been amazing the world with their successful performances, England has been testing out its first winged



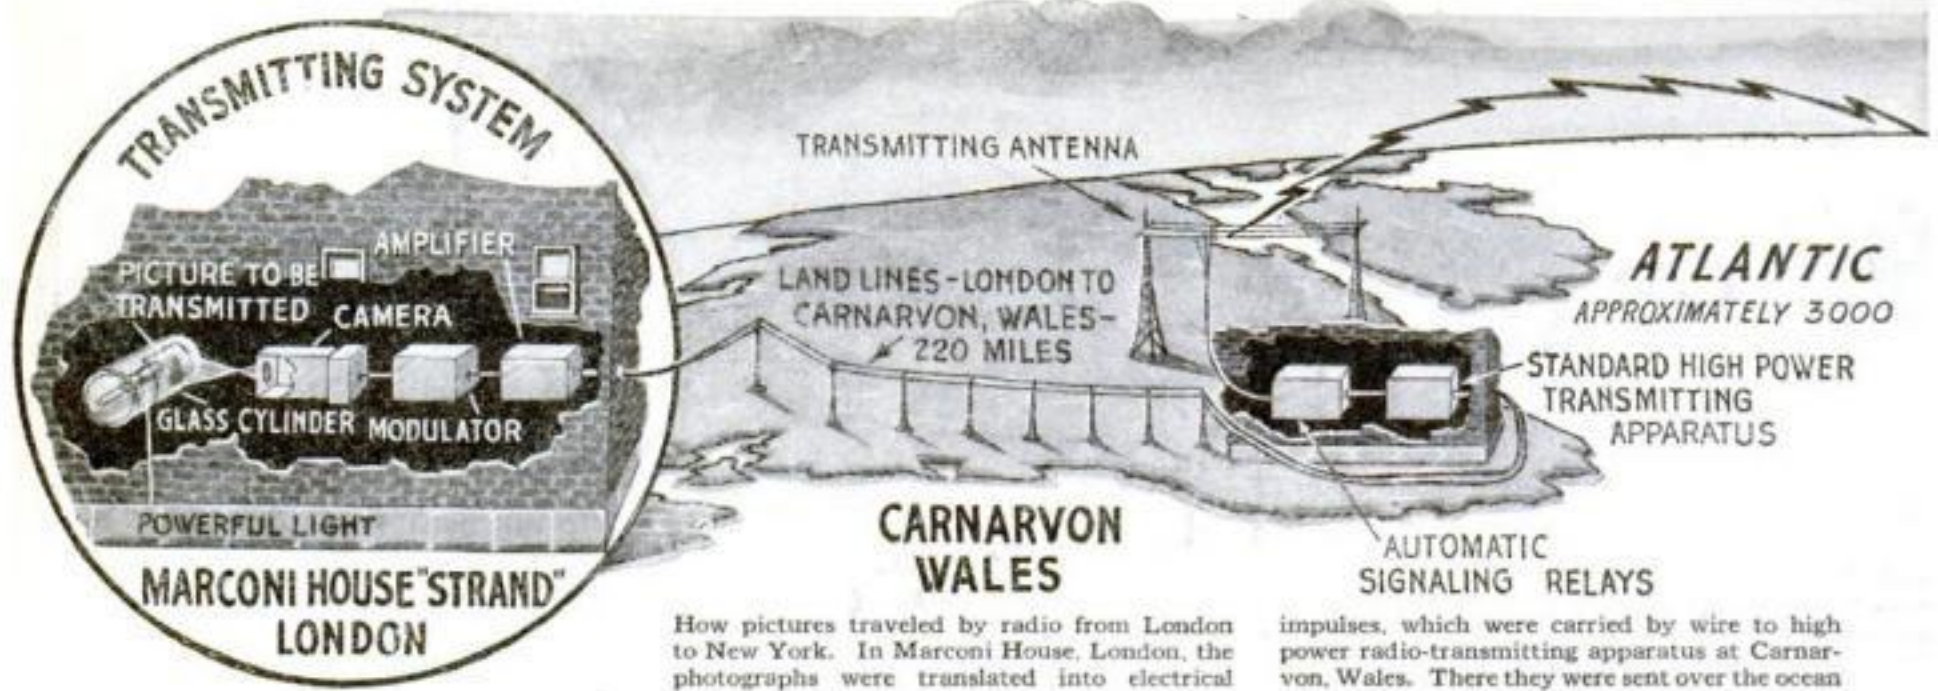

# Radio Photos Cross the Sea

The news in pictures is flashed over thousands of miles by the latest marvel of wireless communication

By Robert E. Martin

"**R**ADIO transmission is too slow," remarked Owen D. Young, chairman of the board of directors of the Radio Corporation of America and the General Electric Company about a year ago. "I am tired of this dot-and-dash business. I want to see the time come when an operator will press a key and—zip! the first page of the London Times will be reproduced in New York."

From this suggestion has sprung what is probably the most amazing development that has come in the radio art since the beginning of broadcasting—wireless transmission of pictures more than 3000 miles across the Atlantic from England to the United States. The "zip" stage has not yet been reached. The first page of a newspaper cannot be sent over the ocean in a flash. But a photograph or other picture, or printed matter not too large in size to be accommodated by the transmitting and receiving apparatus that has been developed, can be sent across the ocean in about 20 minutes, the time it takes in ordinary radio practice to transmit 600 words by the dot-and-dash method.

**R**ADIO Corporation engineers, headed by Capt. Richard H. Ranger, are responsible for this new wonder in radio, which in time may revolutionize the present system of transmitting messages.

In one important particular, at least, the engineers who designed the radio picture transmitting and receiving apparatus have departed from the methods used in the past to transmit pictures through a distance. Where most previous successful systems have printed the received pictures only by means of light rays, in the new method of reception, not only is each picture reproduced photographically, but an additional picture is inked in simultaneously by an electrically controlled fountain pen that moves in wavy lines in accordance with the electrical

impulses received from the transmitting station.


These pen-drawn pictures, which are made visibly, were intended at first merely as a check on the photographic reception process, which takes place within a special camera. It happened, though, that the pen-and-ink pictures presented such an odd and pleasing effect that the engineers concentrated their efforts on this method of reproduction.

In transmission, a photograph of the matter to be sent is made on a positive film. This is placed on a glass cylinder, and an exceedingly thin ray of light is focused on the film from within. This beam travels across the film in the direction of the length of the cylinder, and after each journey of the ray, the cylinder is revolved a minute distance. Eventu-

ally the whole film is traversed by the light.

As the ray issues from the film, it passes into a photo-electric cell. The intensity of the ray, of course, varies as it penetrates dark or light portions of the film, and these variations produce corresponding variations in the electrical impulses that issue from the photo-electric cell. Thus light waves are transformed into electrical waves, which, amplified by vacuum tubes, may be transmitted by radio.

**A**T THE receiving end these electrical impulses are led through an amplifying device to the reproducing apparatus pictured on these pages. The amplified radio waves there operate an electrically controlled lever connected with a fountain pen. Each pulse of current causes

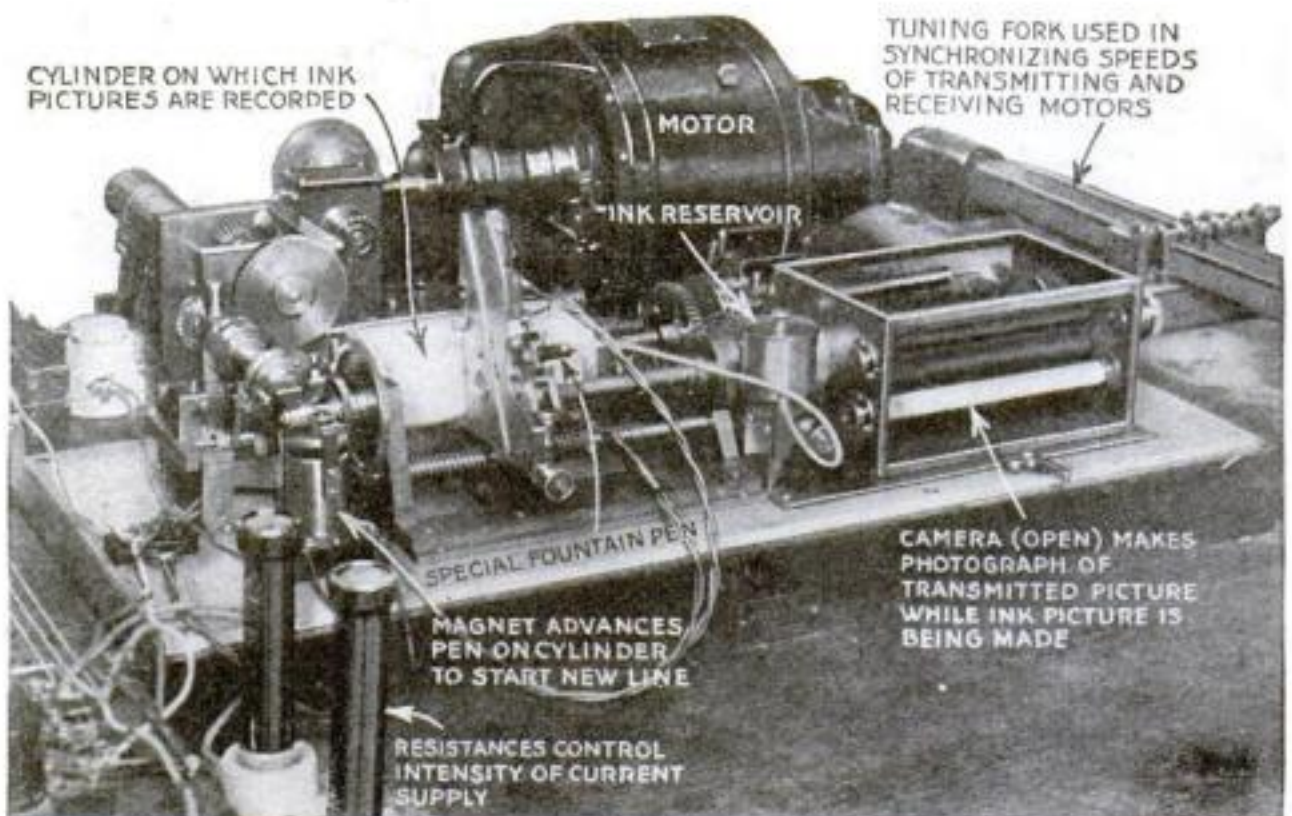


The Machine that Turns Radio Waves into Pictures

Here is the remarkable receiving apparatus that translates radio-photograph signals simultaneously into photographic negatives and pen-

and ink reproductions of the original transmitted pictures. Its perfection makes it possible to flash pictorial news across the ether



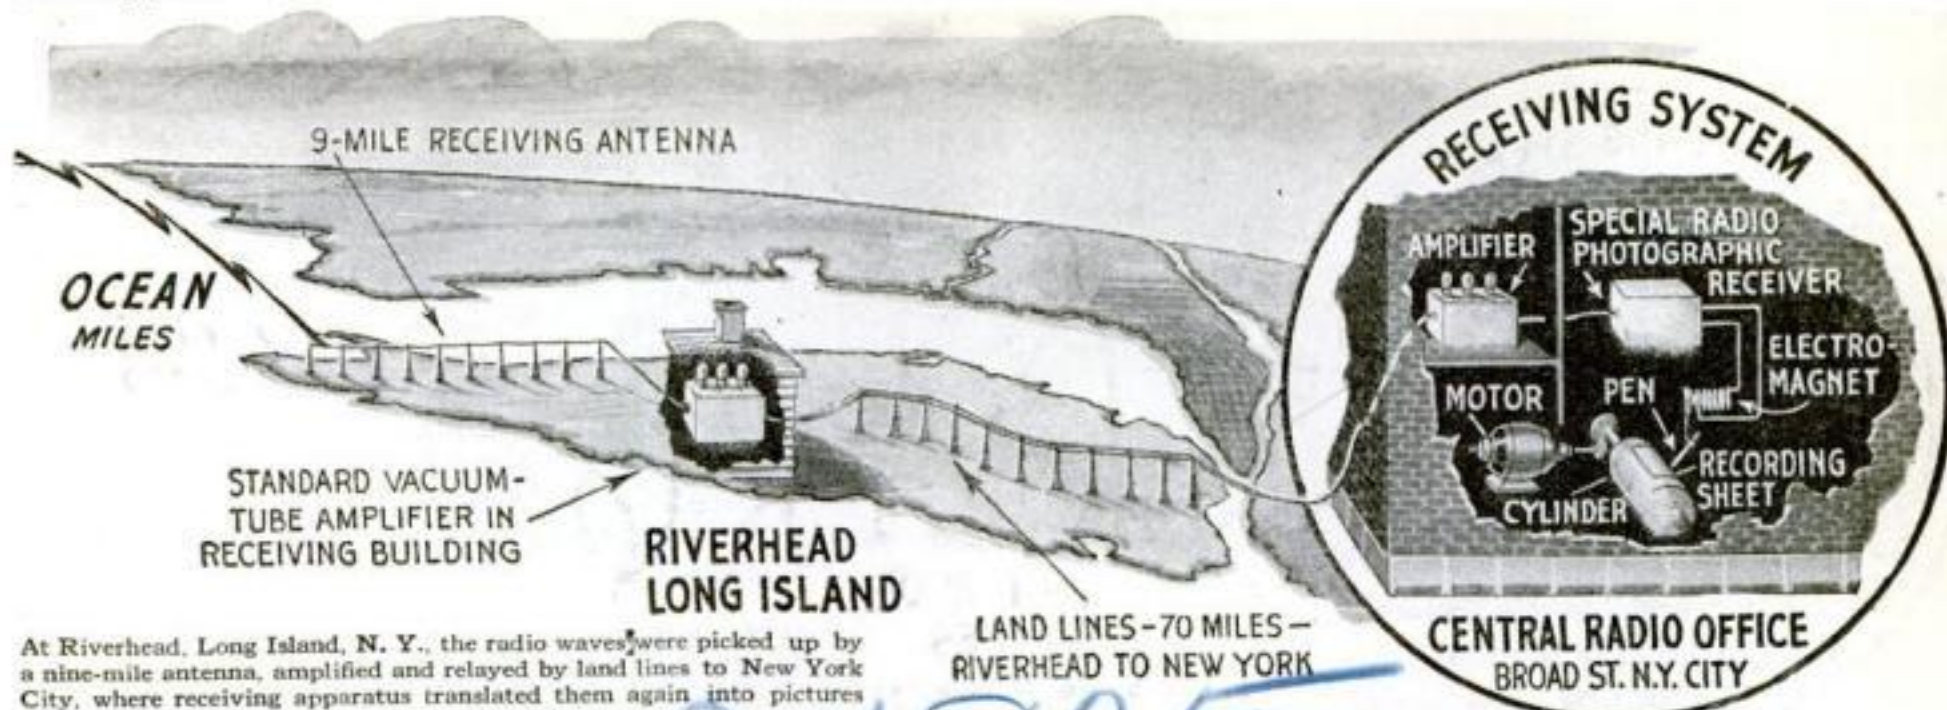

At Riverhead, Long Island, N. Y., the radio waves were picked up by a nine-mile antenna, amplified and relayed by land lines to New York City, where receiving apparatus translated them again into pictures

the pen to leave a mark on the surface of a paper wound about a cylinder that is the same size as, and revolves synchronously with, the cylinder at the transmitting end.

SINCE the movements of the pen correspond with the original light waves that passed through the transmitting film, the received picture is virtually an exact duplication of that which is being transmitted. It is not an exact duplicate, for the reason that the pen tracing the received picture moves in wavy lines. These are caused by a transmission method that Captain Ranger devised. Instead of transmitting continuously, he has included in the sending apparatus a sort of trap where the electrical impulses are stored up until they reach a certain strength, at which they automatically become short-circuited and discharge. The result is that the recording pen moves not in a continuous line, but in a series of "dots" and "dashes." The wavy effect produced thereby is rather attractive and unusual.



Photograph of President Coolidge sent by wire from Cleveland, Ohio, to New York



The Same Photograph as it was received in New York by wireless from London

While these line reproductions are being formed, a camera installed in the receiving apparatus makes a photograph of the transmitted picture.

At about the same time that pictures were crossing the Atlantic on the wings of the ether, C. Francis Jenkins, of Washington, D. C., was demonstrating publicly his system of radio picture transmission, described in stages of its development in POPULAR SCIENCE MONTHLY for May, 1923, and June, 1924. The Jenkins method is based on the same scientific principles as that devised by the Radio Corporation, but reproduces the transmitted picture as a photograph, not


as a pen-and-ink drawing.

Then, of course, there is the method of picture transmission over wires, developed a few months ago by engineers of the American Telephone & Telegraph Company and Western Electric Company, which also can be adapted to radio. Descriptions of this method were published in the August and October issues of last year's POPULAR SCIENCE MONTHLY.

#### In the Laboratory

The laboratory apparatus used in perfecting the new radio photo system, Capt. R. H. Ranger, of the Radio Corporation of America, is seen at the right placing a film on the rotating transmitter drum.

His assistant, A. J. Koenig, is seated at the left

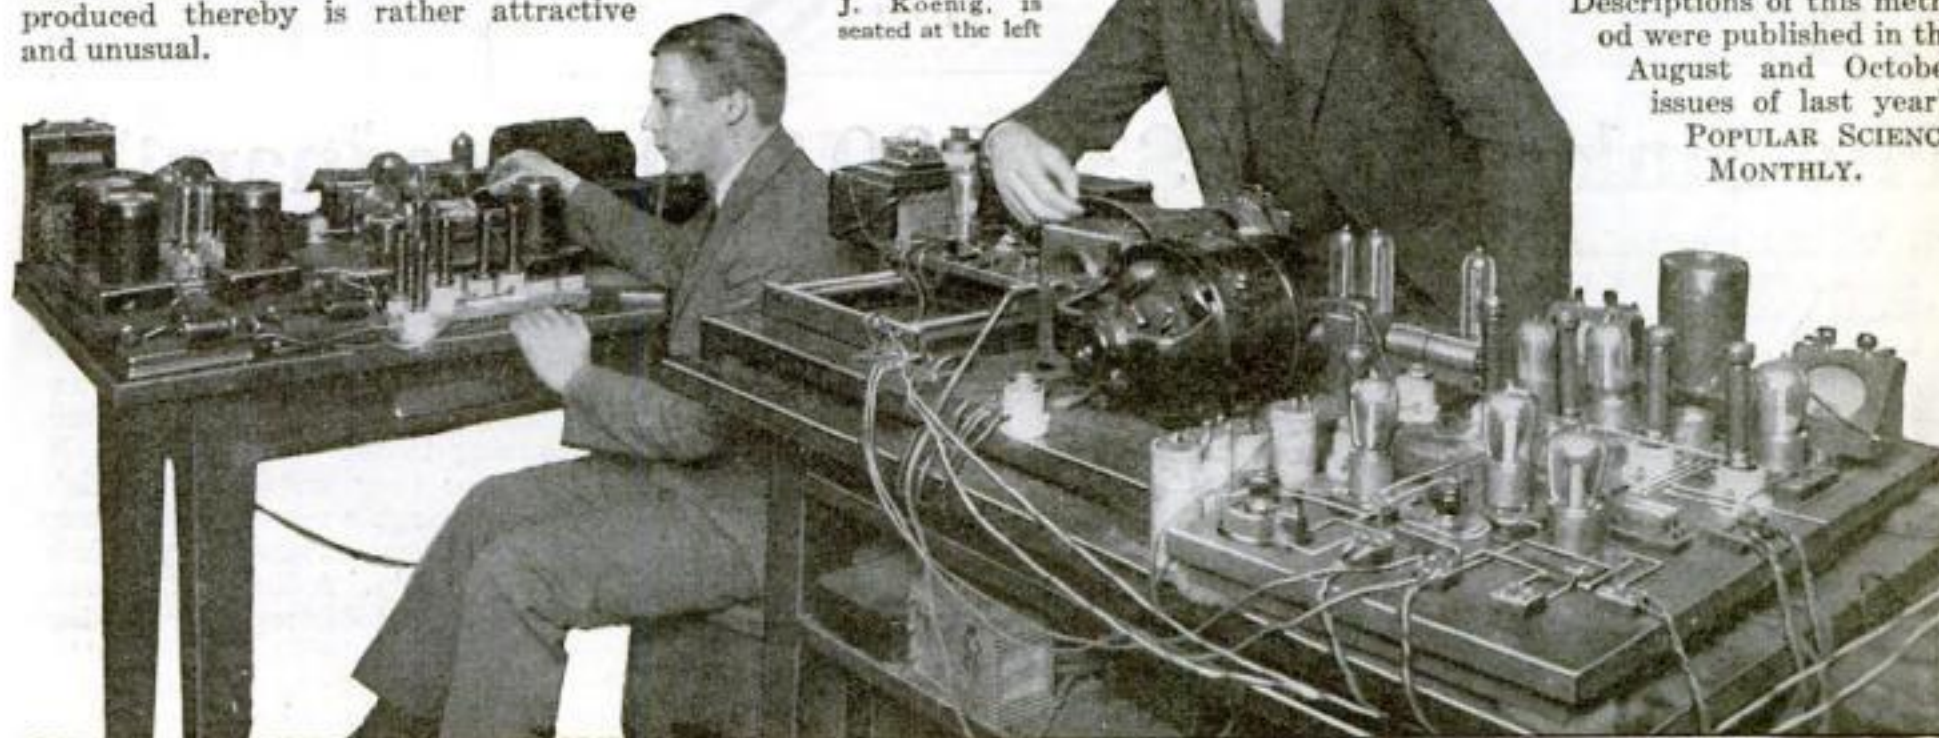




AIRPLANES OBSERVING HITS FROM THE 14-INCH GUNS OF THE BATTLESHIP **TEXAS**.

(LATER, AIRPLANES BOMBED THE **WASHINGTON** FROM THE AIR)

THE \$30,000,000 **WASHINGTON** HIT BY A BIG SHELL. BELOW: AIRPLANE VIEW OF THE HULL SHORTLY BEFORE SINKING

BATTLESHIP **TEXAS**, WHOSE BIG GUNS FINALLY SENT THE **WASHINGTON** DOWN.

NOTE ONE SHELL EXPLODING SHORT OF ITS MARK. ANOTHER CAN BE SEEN BURSTING ON THE **WASHINGTON'S** DECK

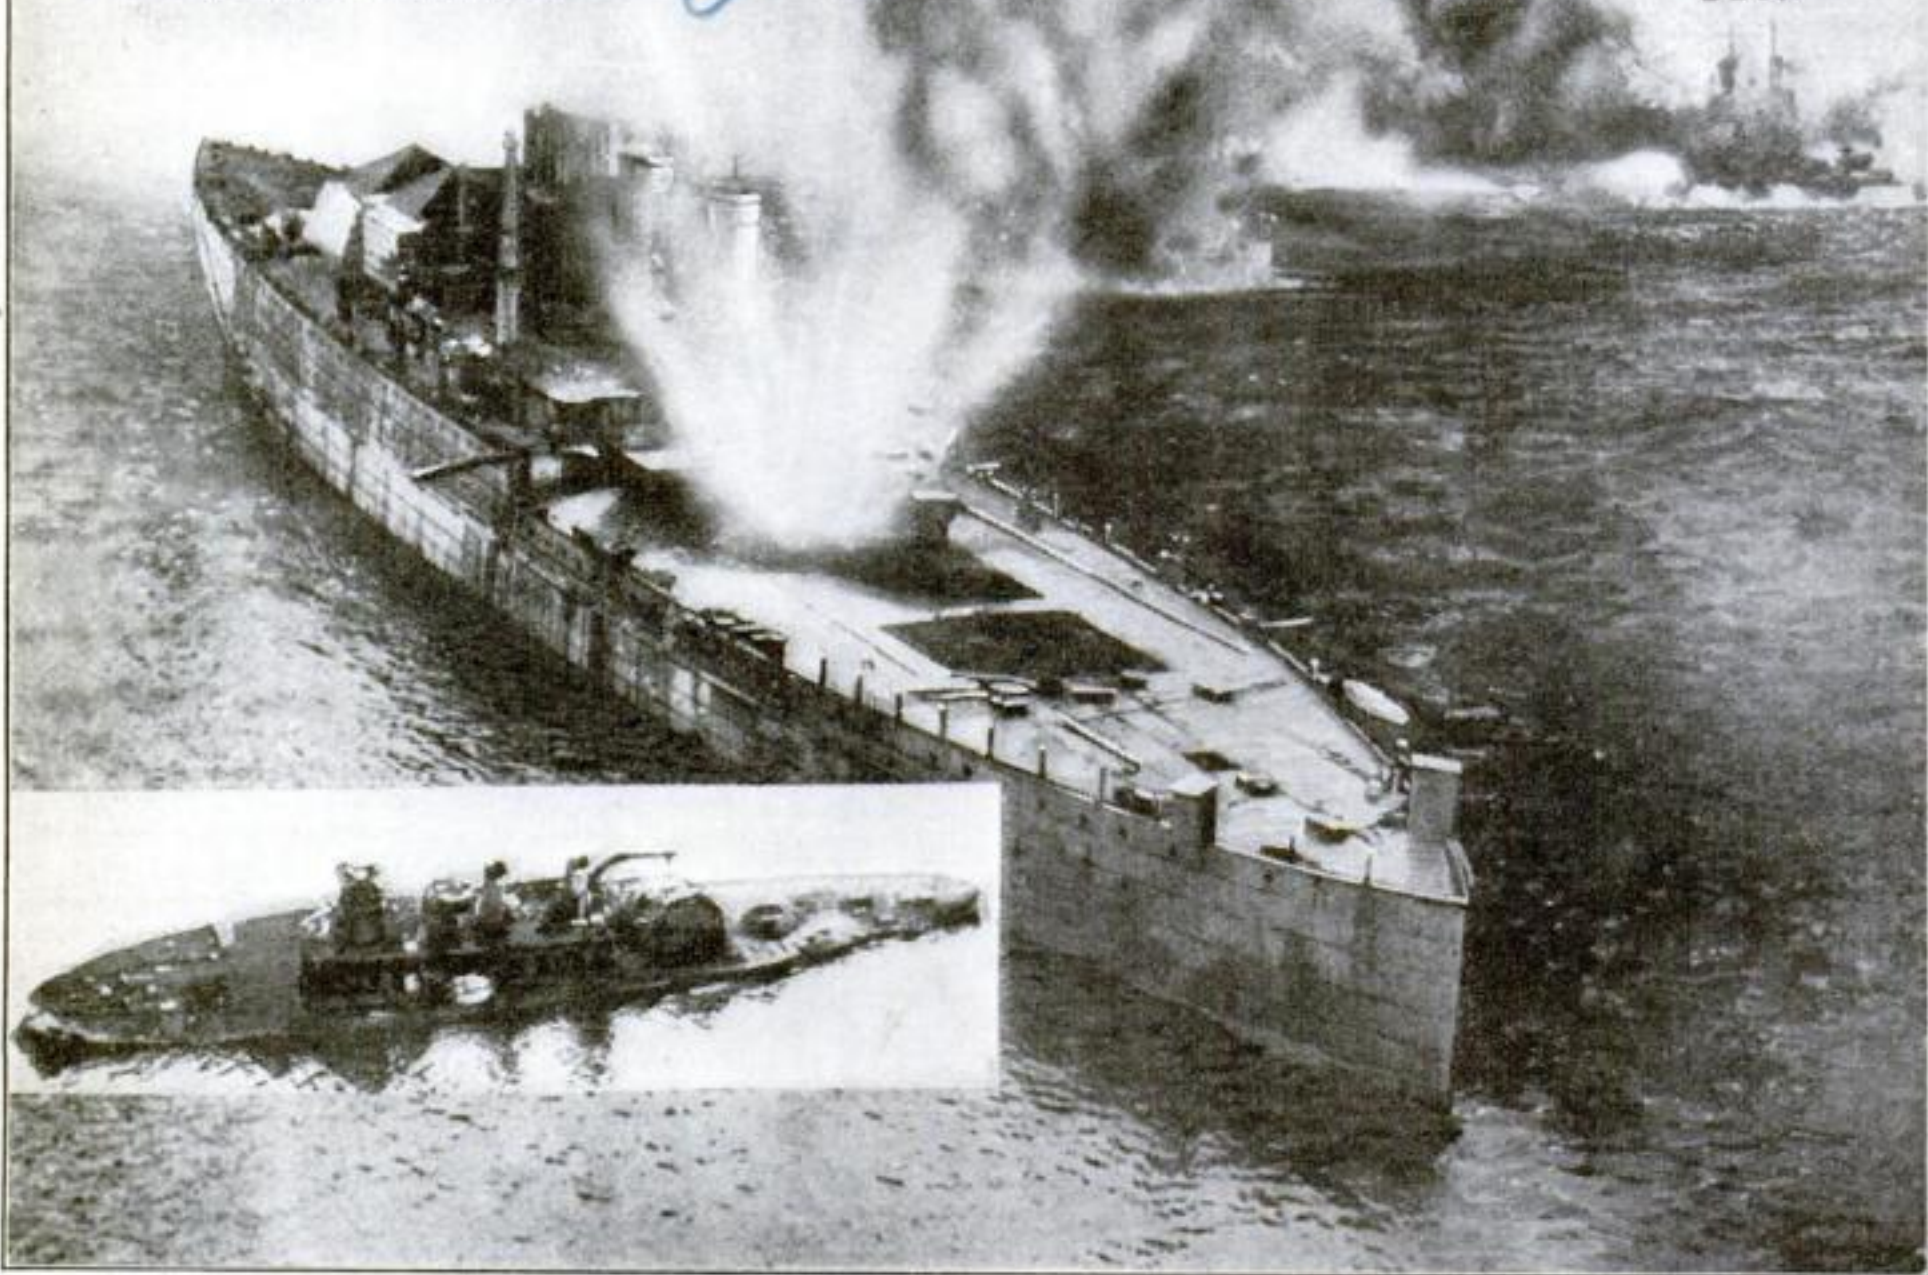

## The Sinking of a \$30,000,000 Dreadnaught

**I**N THESE spectacular photographs of the recent sinking of Uncle Sam's \$30,000,000 dreadnaught *Washington* off Cape Hatteras, after a terrific four-day bombardment by air and by sea, we have a vivid picture of a war that knows no truce: the never-ceasing rivalry between offensive weapon and defensive structure.

Military science tolerates the superiority of neither one. The moment bombs and shells can sink a ship or wreck a fort, then every expert flings himself upon the problem of defense. The minute armor defeats the hail of steel hurled against it,

our military brains fly back to the problem of offense.

So it was with the *Washington*, which, by the Limitation of Armament Treaty, we were obligated to destroy.

"Our chance to prove we're right!" cried the gunnery experts and naval constructors in unison. Who won? Even the experts cannot say. For though the great ship finally sank, her sides sieved by 14-inch shells, the story might have been different had a crew been aboard. At Jutland ships fought on and won despite shot-holes and leaks.

The human aspect of this picture must

not be misunderstood. The old horror of a raking fire that turned the war-ship's deck into a shambles no longer exists. The modern man-of-war drives into action with not a man in sight. Captain, gunnery officer, and navigator stand in their little conning tower. Through slits in 18-inch armor they watch the battle's progress. Through a score of telephones they direct the complex machinery of their swiftly moving ship. A direct hit from an aerial bomb would destroy this conning tower. At once the whole control would be taken up by a substitute command group in one of the heavily armored turrets.



# How Fast Can YOU Think?

An expert tells how to score your mental ability by useful and fascinating tests that you can try on yourself

By Donald A. Laird, Ph.D.

**J**UST how bright are you? I don't mean, "How much do you know?"—because there is a difference. A filled fountain pen contains more liquid than an empty hogshead, but its capacity is not the same. How is your capacity for knowledge—your native intelligence that you have inherited from your parents, as opposed to the store of facts that your brain contains as a result of your schooling, your work, your reading, and your association with your fellows?

I am going to show you how you can test yourself, and see.

The tests you will find here are the kind given to college students to determine their mental abilities. They are an accurate measure of general intelligence—a quality that no amount of study will supply; a quality that the laborer, the mechanic, or the clerk who has not been through high school, or even grammar school, is quite as likely to possess as the man who has earned a college degree.

To know the measure of your own intelligence is highly important to you, and highly useful. It may show you, for example, that you are in the wrong job; that you are wasting your time in some occupation below your abilities, or that you are attempting to make your way in a business or profession that is beyond your powers.

How logical is your thinking? The word *elbow* indicates a part of the arm; *chimney* is a part of a house. Of what is a *speedometer* a part? While some one times you, call out the thing of which each of the words listed below is a part. Take the words in their order, skipping none.

Are you being timed? Ready. Go!

leaf	afternoon	Germany
nail	floor	week
quart	tooth	chimes
board	casters	Chicago
tire	beak	paper

If you completed this test in 23 seconds, you are up to the average of college students. If you did it in less, you are brighter than the average college student.

It may seem strange to you that a simple test such as this—taking which is an exercise quite as fascinating as working the cross-word puzzles that are so popular now—should supply a reliable index to your intellectual powers. These tests, though, are not so simple as they may seem. They were devised by leading psychologists—by Dr. Alfred Binet in France, and by Dr. Henry H. Goddard,

Dr. J. McKeen Cattell, and others in America, after long study of intelligent, dull, and superior persons, to find out what they really could do.

Now try a test of completion—that is, the ability of your mind to fill out an incomplete idea. With a pen or pencil fill in the blanks in this narrative, while

who have never been to college, or even to high school, can better this time. For example, the members of a medical society in a Middle Western city were given a series of tests of general mental ability, such as you are taking on these pages. The same tests also were given to the employees of a contractor who wanted to use them in selecting the best workers.


Among a gang of pick-and-shovel laborers was found a man who got a higher score on the tests than the average physician had made! He was promptly transferred to a higher position that had been difficult to fill. Here the man was happier, because his new work permitted him to use more of his abilities, and because he no longer had to fool around at work that was not the right kind for him.

What is your range of information? Put a cross before each of the words in this list that you understand:

## Tests of Your Ingenuity

Fig. 1. All the blocks in the upper picture fitted together properly form an arrow such as is shown in the lower picture. With your pencil outline on the arrow just how each part will fit. If you can do this in less than a minute, you are above the average in solving puzzling problems. You will find the correct solution on page 158.

Fig. 2. Arrange 11 matches as shown below. Remove three of them and leave two triangles. If you can do it in less than 10 seconds, you are above the average of college students. The correct solution is on page 158.

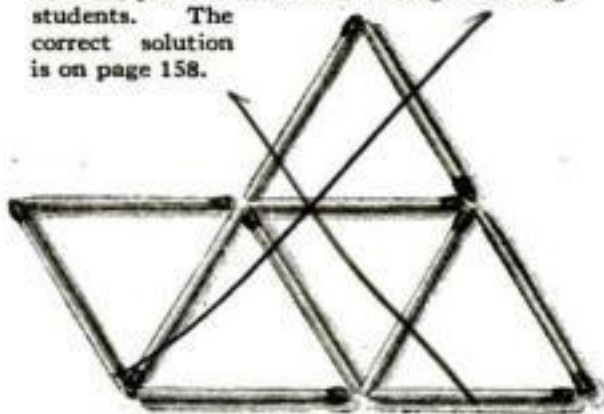

some one keeps a record of the time it takes you to do this:

It — sometimes said ——— women are more honest than ———. It may be ——— are more honest ——— long run, but there ——— instances in which great ——— has been found in some ———. Such, ———, was the case ——— the recent criminal ——— which has received newspaper ———. We are assured ——— honesty of the man in this particular ———, but the honesty of the ——— is open to serious ———.

A college student will fill in these blanks in three minutes. Many persons

assay  
assuage  
astrology  
Audubon  
auk  
Bancroft  
Mendel  
mammal

Beelzebub  
Bessemer  
blather  
Hauptmann  
hypothesis  
ichnography  
incubus  
incognito

keel  
nullify  
Othello  
paunch  
revile  
scup  
Sudan  
terrapin

A college student will have 16 crosses. Some of the funniest things imaginable are written in these tests at times. One college student, for example, said that Mark Twain was a steamboat; another that a revenue cutter was used on a milling machine. Another was working on a test in which the problem was to draw in with a pencil the missing parts of several pictures. One of the pictures was a pig, with the tail missing, and the student drew horns on the pig's head! I have found other students who were unable to detect that the eye was missing in a picture of a woman's face.

All of which is only another indication of what I said before—that going to college does not supply brains. Abraham Lincoln and Edison never went to college, but that they possessed intelligence nobody would deny.


How are you on numbers? Maybe accounting or some similar line of work is your forte. Try the following test, to see whether you have a natural aptitude for figures. While some one times you, check each group that contains a number 6. The average college student can do this in 40 seconds. If you can better this time appreciably, it is a sign that you probably have a "good head for figures."

(Continued on page 158)



# Sunken Riches Lure

## Amazing New Deep-Sea Armor Revives

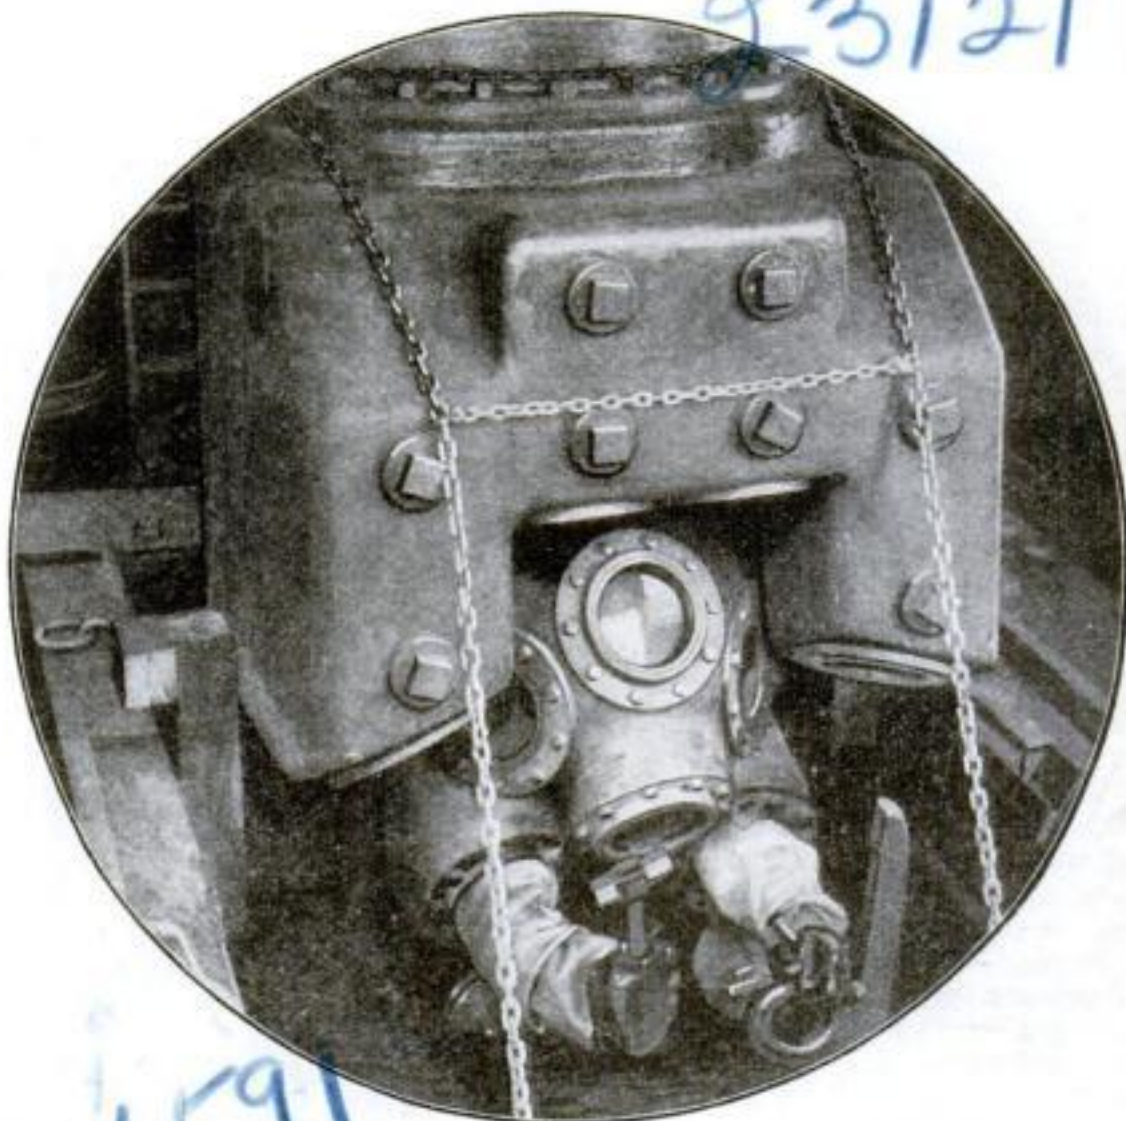

A Work Chamber on the Ocean Floor


Never before has the glamour of adventure in searching the seas for sunken treasure so appealed to men's imagination as it does today; for recent submarine inventions are making it possible to descend hundreds of feet beyond what heretofore has been the limit of human endurance. The armored chamber

shown above is one of these new devices, invented by Capt. Charles Williamson of Norfolk, Va. Lowered from a floating barge, it rests on the sea floor, where the diver's hands are free for work. It is designed to descend to a depth of 800 feet. The greatest depth possible heretofore has been about 200 feet



### May Recover *Lusitania's* Wealth

Will the all-metal armor shown above enable divers to recover the \$5,000,000 that went down with the *Lusitania*, and now lies in 285 feet of water? The inventor is confident of working 1000 feet under-sea. Notice how the diver is lowered by a crane

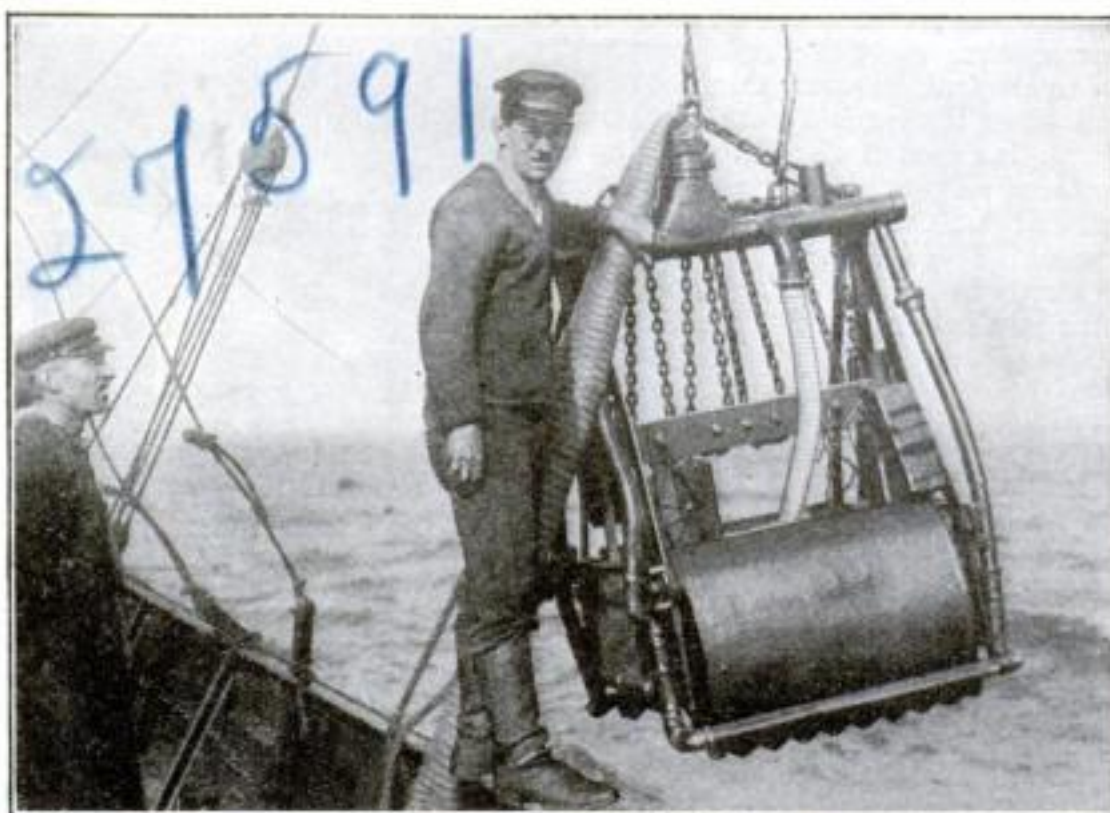

### Mechanical Claws Grapple for a Fortune


With this apparatus—a combination grasper and sand sucker—two British contractors are attempting to salvage the famous

English frigate *Lutine*, which sank off the northern coast of the Netherlands in 1797 with a cargo of gold estimated at about \$5,000,000



# Modern Adventurers


## Romantic Treasure Hunt in Wrecked Ships

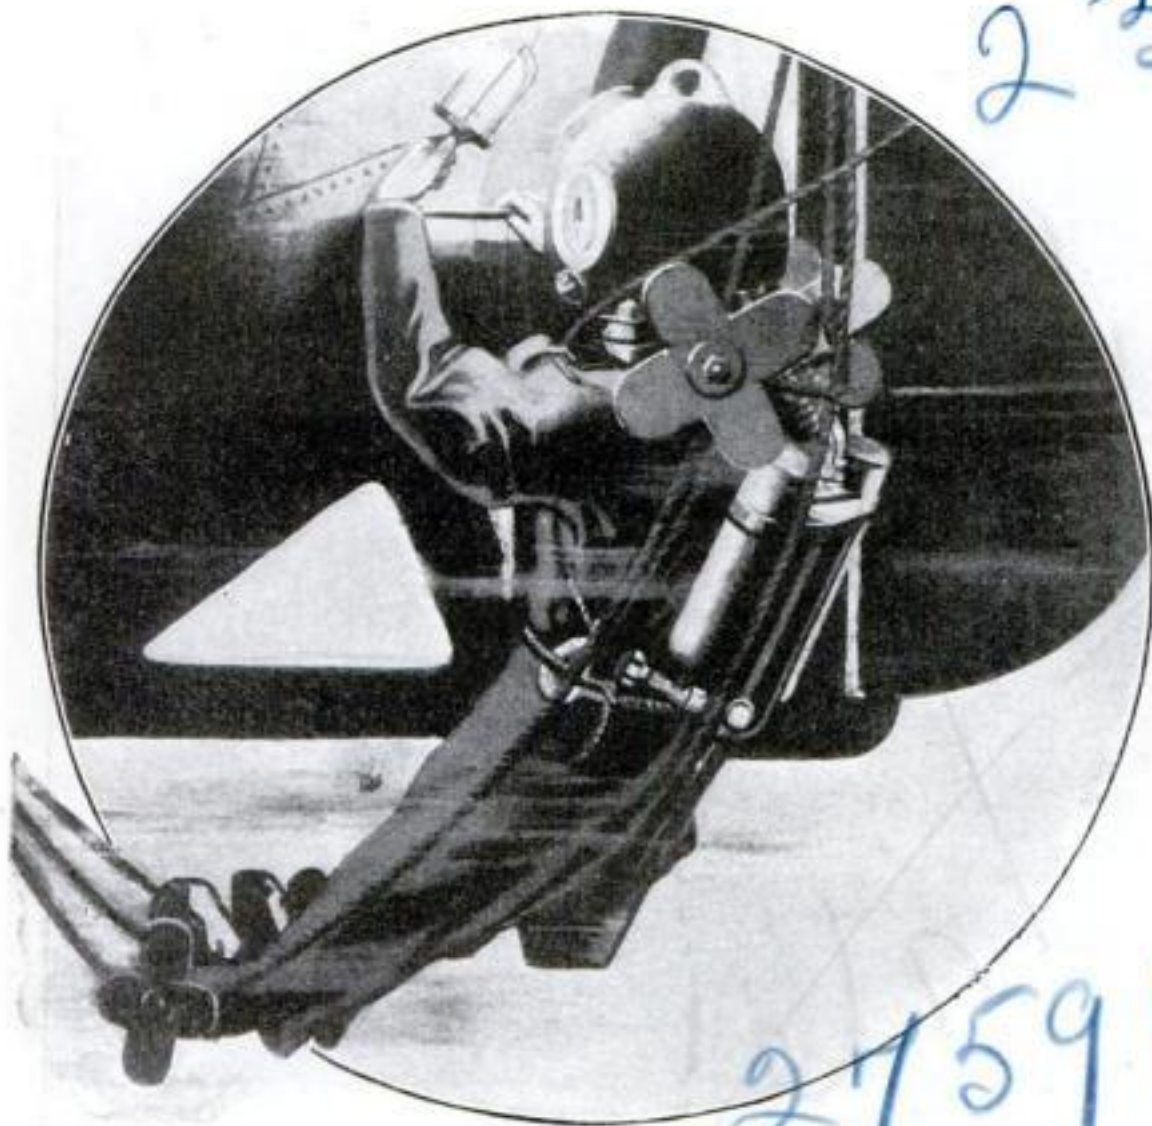

### How Divers Salvaged \$30,000,000 from *Laurentic*


The recent dramatic success of divers in recovering a golden cargo worth \$30,000,000 from the wreck of the *Laurentic*, sunk by a submarine off the northern Coast of Ireland in 1917, has spurred other adventurers to seek more of the sea's treasures. Only a few weeks ago, four young Americans located the

wreck of the Ward liner *Merida*, which went down in a collision off the Virginia capes in 1911. They are at work to recover her cargo of gold, silver, and jewels—a prize estimated at from \$2,000,000 to \$5,000,000. The above illustration shows how divers worked on the hull of the *Laurentic*, which sank in 90 feet of water

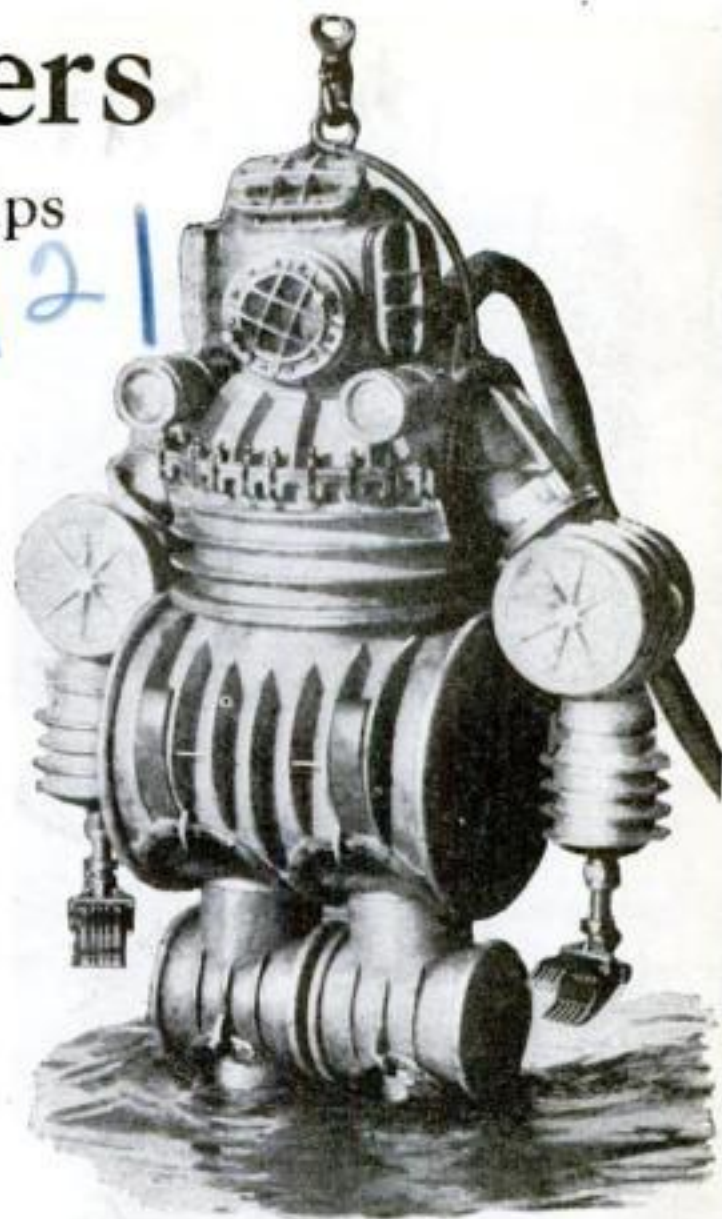

### A Mechanical Sea Monster

Picture this weird steel monster groping in the murky depths off the coast of Scotland in search of the fabulous treasures that went down with the Spanish Armada more than three centuries ago. Then you will have a real modern romance. The armor is so heavy that a man would be unable to move with it on land. It is electrically operated throughout. Notice particularly the claws that have the power of the combined grip of 100 men

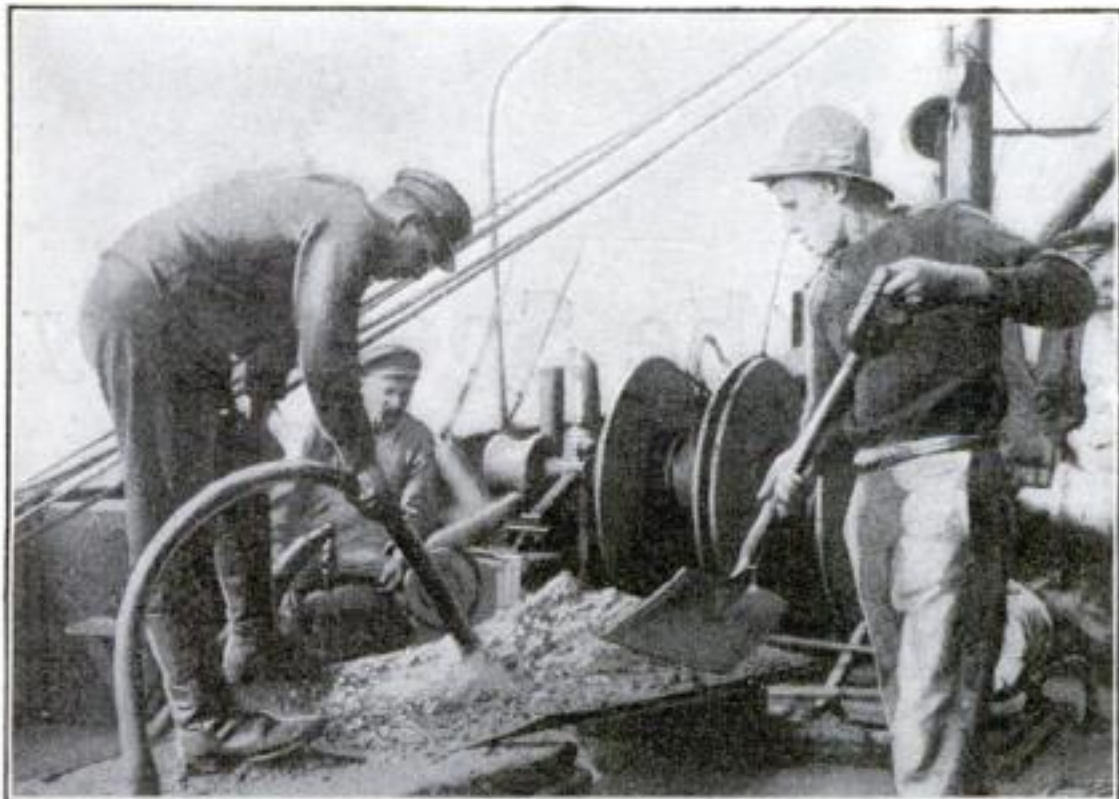

### Washing Gold from the Ocean's Sand

In seeking riches buried with the frigate *Lutine* in 45 feet of sand, the earth and sand brought up by

the grasper shown on the opposite page are carefully washed to recover gold and silver, as in the illustration



### Remains under Sea Four Hours

It is claimed that four men can remain under the sea four hours in this huge diving bell recently tested near New York City. The four white disks are magnets by which the bell attaches itself firmly to a sunken ship during salvaging operations





Courtesy International News Reel

## A Thrilling Spill on the Speedway

THESE six photographs are reproduced from what is probably the most remarkable motion picture of an automobile racing accident ever taken. They show a racing car turning a complete somersault on the track, catapulting the driver high into the air; then, as he falls to earth again, rolling over upon him to crush out his life.

It was by chance that such a dramatic picture story was obtained. The camera man was at the race track at Hawthorne, Ill., recently, "shooting" pictures of a preliminary tryout. Suddenly a streamlined racer driven by Norbert Wylie, approaching the grand-stands at a speed of

more than 90 miles an hour, was side-swiped by another car. Wylie's machine careened in a dizzy spin, toppled over and somersaulted. There was a sickening crash, and the driver lay dead beneath the thundering speed machine of which a moment before he had been the master.

IT WAS all over so quickly that the amazed spectators hardly knew what had happened, yet the camera's unerring eye had caught every detail of the tragedy.

In picture 1 the ill-fated car is seen at the instant the driver lost control. It has skidded sharply and is tilted up sidewise on two wheels, about to roll over.

2. A fraction of a second later. The car has turned upside down, hurling the driver into the air.

3. Wylie is seen falling in the path of the plunging machine.

4. Here the car has risen on its haunches, while the falling driver has almost reached the ground.

5. Like some brutal monster, the machine, digging its sharp tail into the track, lifts itself upward, ready to strike at its fallen master. Notice the seat cushion leaving the car at the right.

6. The instant before the fatal crash, with the racing automobile completely off the ground.



# Automatic Controls to Make Our Trains Safer

## How Machinery Prevents Collisions when Human Hands Fail

By Norman C. McCloud

**I**N THE vestibule of a limited train recently I saw the conductor, startled into sudden action, throw open the outside door and look backward. With his first move he pulled the overhead emergency cord. The swiftly speeding train jerked to a standstill in a manner that must have surprised the engineer as much as it jolted all the passengers.

In passing a signal tower the conductor had caught a flashing glimpse of the operator lurching unsteadily toward a window. Investigation revealed that the man had developed a sudden attack of illness and had fallen unconscious. Since the tower stood at the crossing of another important railway, the alertness of the conductor had made it possible to prevent disaster.

This incident of travel illustrates the importance of automatic train control, now mandatory for the first time in the history of the United States. The requirements became effective January 1, after several years of preparation. They were imposed by the Interstate Commerce Commission through peremptory orders addressed to 49 important railways, issued in June, 1922, and stipulating that each road, within 2½ years, should properly safeguard at least one full passenger locomotive division of main-line track.

Automatic control is intended to do what was done by the conductor in the case of the fainting signal operator—and do it with-

out waiting for human prompting. Its chief function is to prevent collisions, of which, in 1923, there were 938 on railroads of the United States, resulting in the death of 83 persons and the injury of 1660 others.

To reduce this costly toll by safeguarding against the failure of the human factor in railroad operation, 49 roads have installed automatic equipment on an average of 100 miles of track apiece.

This means about 5000 miles of American railways under automatic control.

The new devices are designed to guard against such possibilities as the sudden death of an operator in his tower or of an engineer in the cab of his locomotive, and to protect the train against the unexpected stoppage of a train ahead, the approach toward a broken rail, or the peril of an open switch. They remove the danger that impends when a signal is obscured by fog, smoke, or other causes.

**A**UTOMATIC train-control devices are of three general types: The ramp system, electrical induction, and magnetic induction. All convey to the locomotive cab detailed information concerning the state of the track ahead. This is accomplished through electric circuits of which the rails are the basic factor. When necessary, the devices seize control of the train and bring it to a standstill by sharp application of the air brakes.

The ramp system uses short lengths of a third rail, placed alongside the track at the approach to a wayside signal. This rail, or ramp, is somewhat higher than the regular rail, and slopes at each end. The locomotive is equipped with two metal shoes, arranged so that they establish contact with the ramp. When the shoes slide up the incline at the end of the ramp, one of two things will happen. If there is a train that is too near ahead, a broken rail, or an open switch, the rising motion of the



### Safeguarding the Limited

A Chicago & Eastern Illinois limited train at a control ramp that automatically applies the brakes if the engineer fails to respond to danger signals. The ramp is the extra rail at the side of the track. The upper view shows the two metal shoes that establish contact with the ramp





shoe operates a plunger that causes the completed circuit to apply the automatic brakes. On the other hand, if the track is clear, the rising motion is nullified by a contact device and brakes are not used.

The electrical-induction and magnetic-induction systems dispense with the intermittent ramp and operate continuously. Information concerning the track ahead is transmitted through the rail circuit and reaches the cab by means of induction, through the medium of coils or magnets placed alongside the rails. The locomotive is equipped with receivers to pick up the induction impulse from the coils or magnets. The impulse thus communicated actuates the control apparatus aboard the locomotive and applies the brakes when necessary.

In some devices the impulses picked up by the receivers are said to be of sufficient strength to be used without amplification. In others the designers have provided for amplifying the impulses by

vacuum tubes, similar to those used in radio.

In the cab of an automatically controlled train in which I made a recent trip, the engineer sat facing an interior outfit of signals, consisting of three electric lamps controlled by a speed indicator acting on the principle of a centrifugal governor. The apparatus was set to prevent speed of more than 60 miles an hour.

For some distance we moved at less than 60 miles an hour. On a slight down grade the speed increased until the indicator was above the prescribed limit, warning the engineer that he must reduce his rate of travel. The warning disappeared as soon as the excessive speed had been eliminated.

"It was up to me to slow down quickly," the engineer told me, with a good-natured grin. "If I hadn't, the blamed thing would have taken the train away from me."

Therein lies one of the important

factors of automatic control. As long as the engineer is on the alert, he loses none of his responsibility or command. But if he fails to heed the warning the brakes are applied automatically. He could not have allowed his train to maintain the high speed if he had tried. The centrifugal governor would have applied the brakes without a second warning.

Tests on the Erie Railway have produced striking results. Passenger trains of eight steel cars, running at 47 miles an hour, always have been stopped automatically within 1200 feet from the time of the automatic application of the brakes. Under company rules the normal allowance is 1600 feet. Freight trains averaging 79 cars, with weight of 6326 tons to the train, achieved stops within an average distance of 1713 feet, from a speed of 30 miles an hour.

The program of the Interstate Commerce Commission contemplates expansion of the automatic control to all roads.

## Artificial Throat Returns Speech to Cancer Sufferers

TWO men stood on a platform in Baltimore, Md., recently before a gathering of surgeons. Neither had spoken in several years, their vocal cords having been removed in operations for cancer of the throat. They attempted to speak, but the results were only slight hisses from their lips and louder sibilant sounds as the air from their lungs sighed through the apertures in their throats left by the surgeons' knives.

Then Dr. John E. Mackenty, well-known laryngological surgeon, of New York, handed to each man a little device of rubber tubing and silver, quite like some odd form of smoking pipe. The rubber tube each man affixed to a pad that was strapped to his throat over the hole through which he had been breathing since the operation that had taken his voice away. The other end of the apparatus—a tube of hard rubber resembling a pipe stem—each placed inside his mouth.

Again the men attempted to speak, and this time there issued from their lips intelligible, articulate speech!

This was the first semi-public demonstration of the artificial larynx, an amazing device developed by Dr. Harvey Fletcher, Raymond L. Wegel, and Clarence E. Lane, engineers of the Western Electric Company, which ends the hitherto hopeless silence of those who have lost their vocal cords in operations for cancer.

The artificial larynx is not

at all a complicated apparatus. It consists merely of a pad, strapped over the breathing aperture in the patient's throat, a rubber tube through which air is carried from the lungs, a little cylindrical box containing a diaphragm of thin rubber, and another tube by which the air set into vibration by the rubber diaphragm is carried to the mouth. Movements of the lips and tongue then form the speech sounds just as in the normal act of speaking.


The result is speech that is entirely intelligible with volume enough to carry across a large room. Unlike natural speech, however, it is delivered in a monotone, since the rubber diaphragm that simulates the vocal cords cannot be stretched and compressed at will to produce variations in pitch. Fourteen persons have been using an earlier and less

perfect form of the invention for about a year. Now, though, the artificial larynx will be manufactured in quantities that will make it available to all who require it. No attempt will be made to market it on a profitable basis, it is announced. Those who require one, yet cannot afford it will be loaned one. To those who can afford it, the price will be the exact cost of manufacture.

CANCER of the throat is extremely malignant, and victims survive only from 18 months to two years without an operation. Any form of local irritation may lead to the development of the disease, common contributing causes being excessive talking or shouting, excessive smoking, and bad liquor. Since it is a disease not often encountered, sometimes it is not recognized at once by physicians.

The operation is exceedingly delicate, necessitating the removal of the larynx (the Adam's apple) and the adjacent parts of the throat. One of the final steps in the operation is carrying the upper end of the windpipe forward into the wound and sewing it up in such a way that the windpipe communicates directly with the outer air. Henceforth the patient breathes through this aperture and not through his mouth.

The artificial larynx may be used by the patient almost as soon as the wound in his throat has healed. The pad is strapped to his neck continuously, with a layer of gauze underneath to keep the dust out of his lungs. When he wishes to talk, he parts his shirt just below the collar-button, and attaches the rubber tube. Very little practice is required for the user to become expert, and thereafter talking imposes no strain either on speaker or listener.

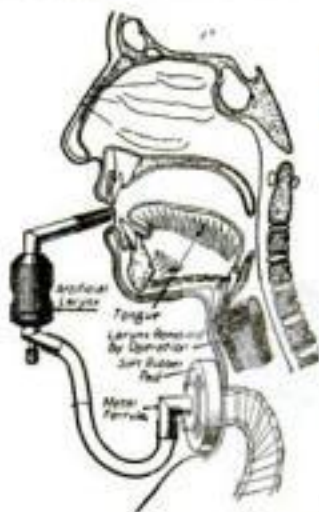

When Science Gives Back the Power of Speech


How a victim of cancer of the throat uses the new artificial larynx that gives him back the power of speech, is shown by the figure on the left. An engineer of the Western Electric Company is demonstrating to him part of the invention that simulates the action of the human vocal cords, removed in the operation for cancer. The patient is holding in his hand the box con-

taining artificial vocal cords. These are actuated by air carried through a rubber tube from a hole in the patient's throat, while the patient forms the sounds of speech with his mouth through a tube resembling a pipe stem. The diagram at upper left shows how the mechanism is substituted for the larynx, removed in an operation for cancer



# Newest Locomotive Marvels


## Giants of Electricity and Steam to Pull Our Trains

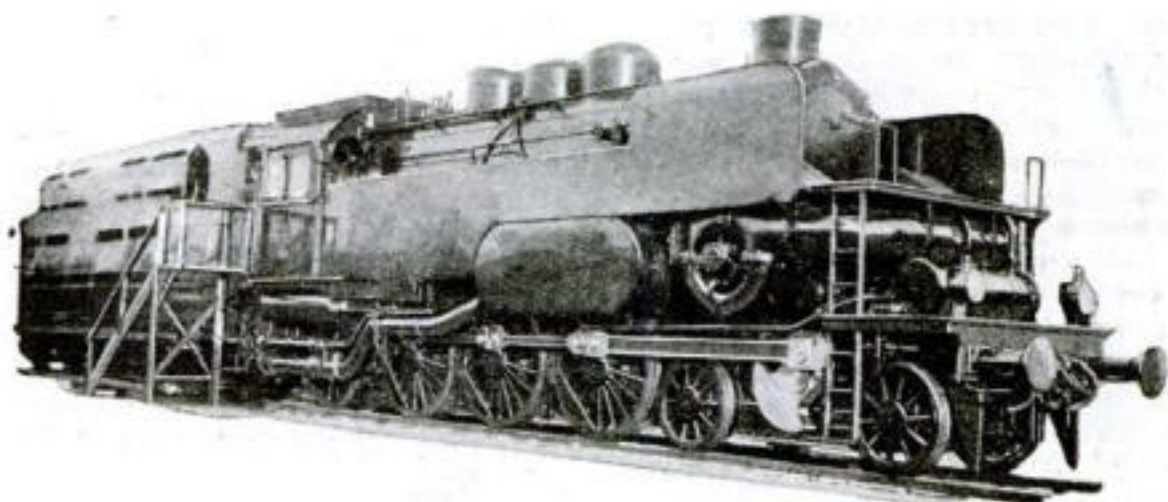

### New Turbine Locomotive


That the common type of piston locomotive is doomed, and will be succeeded by a turbine locomotive that is 10 times as efficient, was the recent statement of Henry Zoelly, noted Swiss locomotive engineer, in a report to the American Society of Mechanical Engineers. "It is positively pitiful," he said, "to see thousands of locomotives running with maximum over-all efficiencies of from seven to nine per cent—very often as low as five or six per cent—whereas an up-to-date stationary steam plant attains with ease efficiencies in excess of 20 per cent."

Above is one of the newest types of turbine locomotives perfected in Germany. The turbine engine differs from the usual reciprocating engine in that the steam pressure, instead of being exerted against pistons, drives against a series of vanes or buckets on a rotating wheel, greatly reducing friction

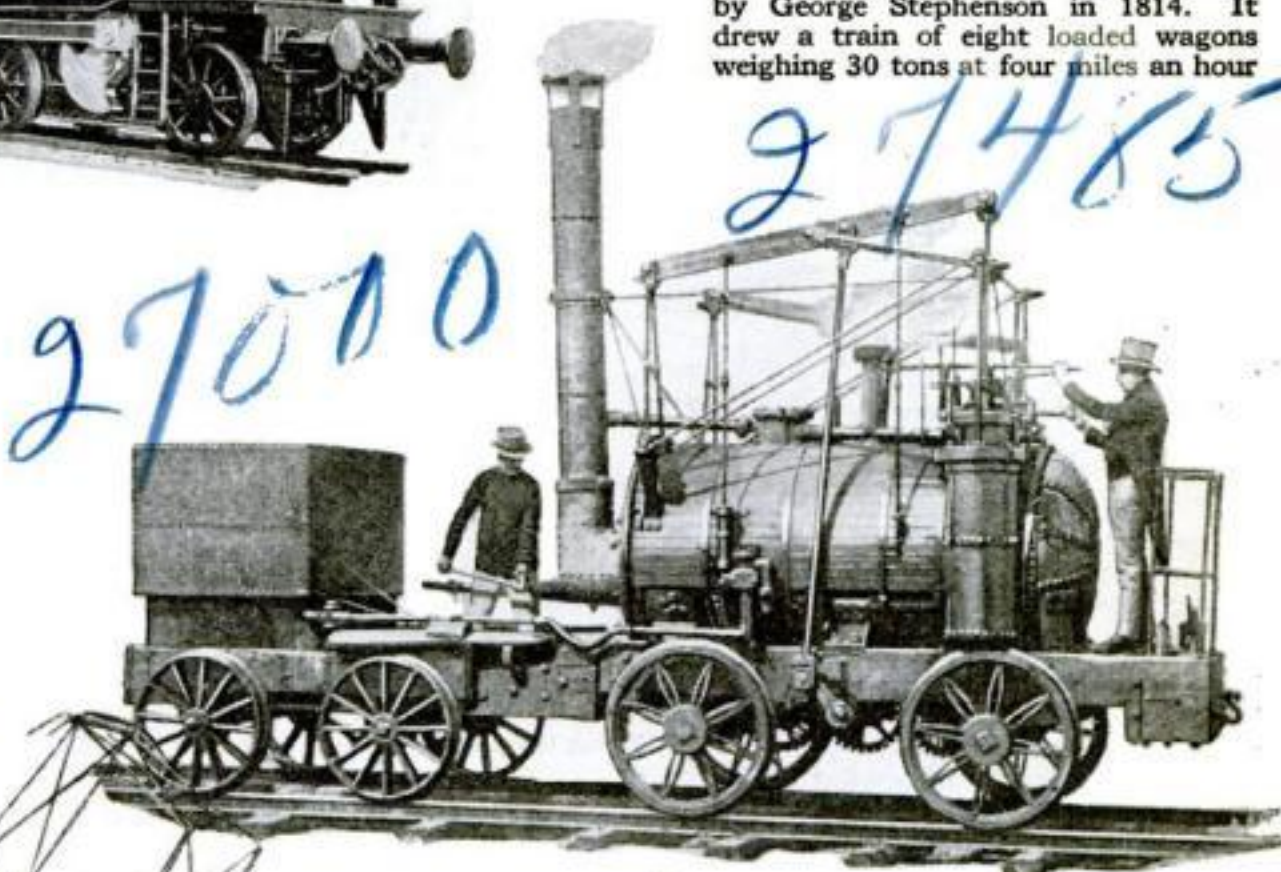

LESS than a century ago the grotesque wood-burning locomotives that hauled American trains did well if they could take a short train along a straight stretch of level track at 25 miles an hour. In less than a century these crude engines have been developed into the giants of electricity and steam that today carry us across the continent in less than five days and pull tremendous loads over mountain ranges.

Below is pictured a duplicate of one of the world's first locomotives, the "Blucher," built by George Stephenson in 1814. It drew a train of eight loaded wagons weighing 30 tons at four miles an hour

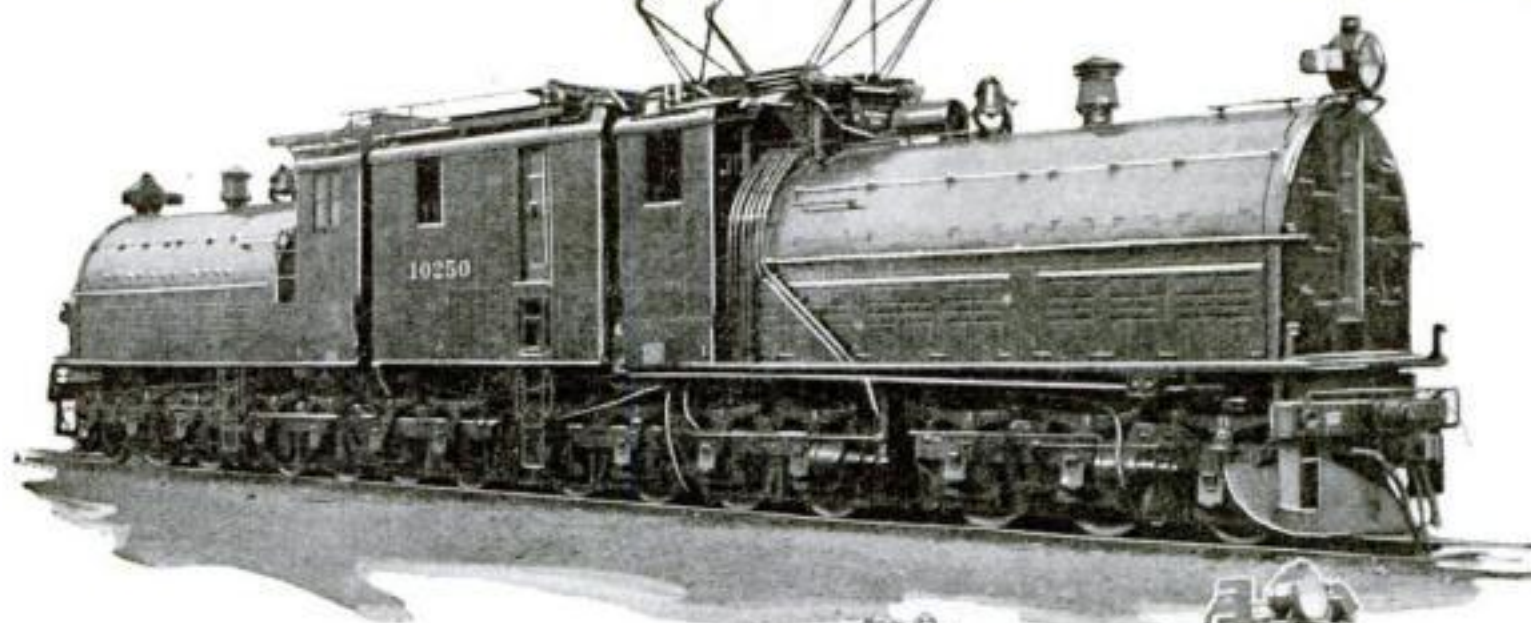


### Gearless Giant

One of the most efficient of the new electric locomotives is the high-speed gearless type shown at the left, used in the mountains of the Pacific Northwest. The motor armatures are mounted directly on the axles, 12 in number. The total weight of the drivers is 458,000 pounds.

The locomotive is in two similar units. Between them is a cab containing a boiler plant for heating the cars of a passenger train. This locomotive is said to be more than 90 per cent efficient

### Run by Storage Batteries

The largest storage-battery electric locomotive in the United States is shown at the right. It was put into service recently in the yards of the General Electric Company at Schenectady, N. Y., and is to be used for switching on inter-connecting track systems. Because of the necessity of recharging its batteries frequently, it is to be used only in a restricted area. The batteries consist of 100 cells with a total current capacity of about 1080 ampere hours, or 216 kilowatt hours

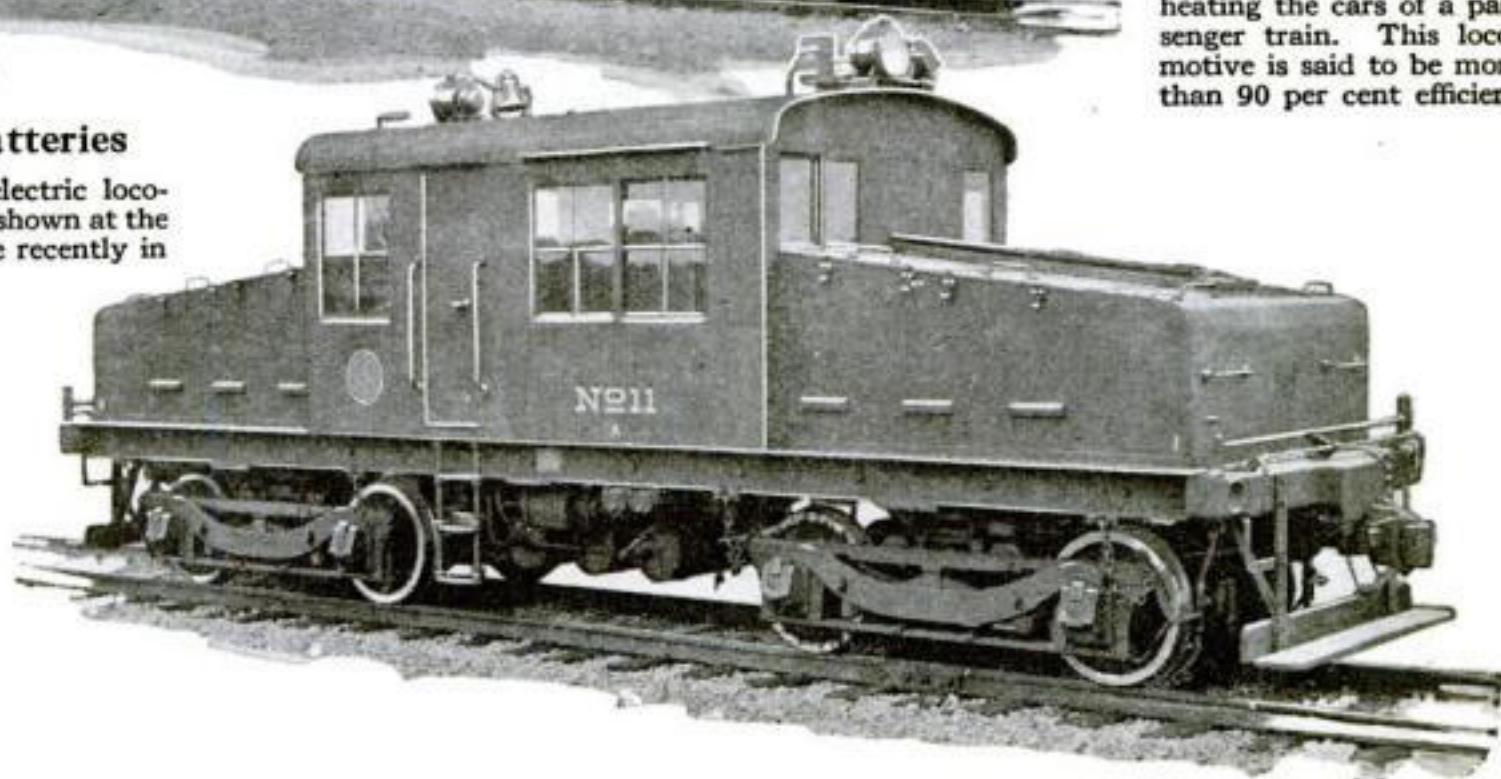



# Speedy Airplanes to Conquer

## Thrilling Stories of Mail Routes that Have Cost

WHEN the United States mail-carrier put on the uniform of an aviator, from all over the country came warnings of disaster. Airplanes sweeping through the black of night, struggling against wild storms, pilots guided only by feeble lights flickering upward at long intervals, deserts and mountains to be crossed, with help difficult to procure in case of accident—all introduced an element of peril into what should be surrounded with utmost safety—the delivery of our daily letters.

But was danger really being introduced?


On the contrary, the way was being paved for a far greater measure of safety in the postal service. Those who live in cities and towns may laugh at the assertion as absurd; but it is not. For there are hundreds of Uncle Sam's postal routes where an airplane would represent the safest possible method of travel—security for the carrier such as he never

service was introduced in Alaska. What had been a 35-day trip by dog sled was completed in less than six hours. It was shown that surface temperature could drop to five below zero and even lower, without offering obstacles to the satisfactory operation of the planes. Rugged

and strong currents usually make short work of it. Sometimes the break-up occurs when the carrier is on the ice with horse and sleigh. The sudden collapse brings great danger, and more than one carrier owes his rescue to the quick work of the coastguard crew stationed on Plum Island, close at hand.


One rescue of a carrier from the break-up was full of thrills. With the destruction of his pathway, the man found himself on an ice cake barely large enough to hold himself, his horse, and his sleigh. The crew of the coastguard station saw his situation and rushed to his aid.

Broken ice surrounded the marooned carrier and made it impossible to reach him, so the coastguards were forced to combine seamanship with the methods of the plains. Their line be-

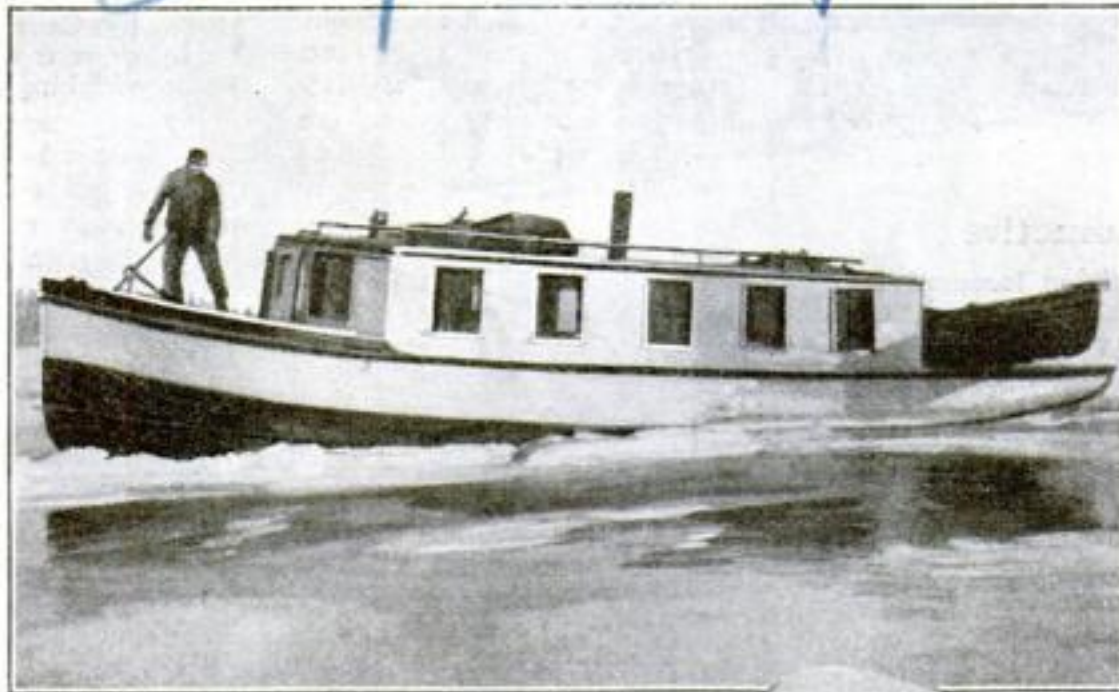

Through the Ice of "Death's Door"

This U. S. mail-boat is shown breaking through the ice past "Death's Door" on the hazardous Lake Michigan star route between Ellison Bay and the isolated community of Detroit Harbor off northern Wisconsin

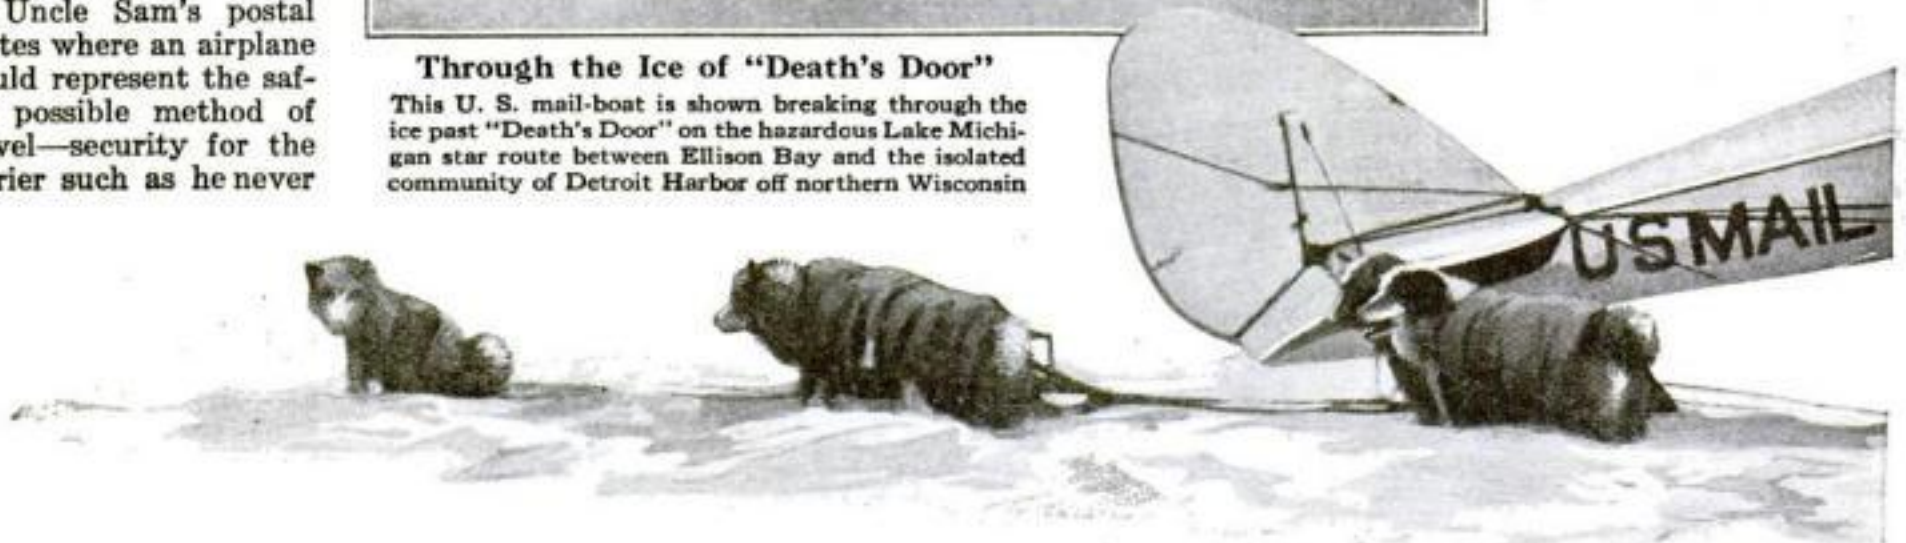

dreamed of. These are what are called the "star routes"—the postal byways in the remote ends of the nation, where the carrier faces death and injury virtually every time he fares forth with his sack. Avalanches, floods, blizzards, drifting ice—these and other hazards of nature contribute to the perils of the carrier who serves the outposts of the postal service. In the last 30 months 55 carriers have given their lives in the performance of duty, and many others have been crippled and otherwise injured.

These unsung heroes of the nation are the ones who will benefit more than any others from the introduction of the airplane and other gifts of science such as the motorized snowsled and power ice-boat into the equipment of the postal service.

The motorized sled, recently invented by a Finnish scientist, has aroused much interest in the Post Office Department. Here is a device that undoubtedly will prove an efficient ally to the airplane in cutting down the frightful toll in lives that for years has seemed inevitable in delivering the mails to such places as the frozen wastes of Alaska.

Recently an experimental air-mail

mountains with passes blocked by avalanches were crossed easily. With motorized sleds to distribute the mail brought in bulk by the airplane, the perils of the carriers in these barren, snow-swept reaches virtually would disappear.

Likewise, the successful establishment of transcontinental air-mail service, cutting the traveling time between New York City and San Francisco from four days to 34 hours, offers the possibility of covering perilous mail routes that now are served at tremendous risk. Such a one, for example, as that which extends from Detroit Harbor, Wis., past "Death's Door." This stretch of travel is on the Lake Michigan water route that forms the sole channel of communication between Ellison Bay and the community of Detroit Harbor. In open weather the route is without difficulties. From November to May it carries dangers that prove that "Death's Door" is well named.

THE chief trouble comes from drifting ice-fields. Extremely cold weather brings about the formation of an ice-bridge, but this seldom remains for more than a few days at a time. Shifting gales

came a lariat. They lassoed the cake of ice, towed it through the water and over the surface of the ice until they brought carrier, horse, and sleigh to a place of safety.

Bucking the slush ice is another peril of the carrier who serves the route through Death's Door. When the carrier cannot find solid footing for his horse and sleigh, he uses a launch. Sometimes the slush is eight or 10 feet deep and impassable, in which case the carrier must fight his way back to the starting point and seek a fresh channel. At times the boat is caught in the drifting ice and carried out into Lake Michigan overnight.

Ellison post office is on Washington Island, an area with a population of one thousand. During severe weather the island may be without mail for five or six days. Such interruptions are serious, for the residents depend entirely on the postal service for contact with the outside world. The parcel post is their sole source of supply for medicine, provisions, and other necessities.

In this case the mail-plane would remove the dangers of Death's Door and



# Perils of U. S. Postal Trails

## the Lives of Many of Uncle Sam's Hardy Carriers

establish contact with the mainland with fine scorn of ice conditions. The entire trip could be made in the time it now takes for a carrier to launch his boat from an ice floe. And if landing proved too hazardous for planes under adverse conditions, it would be a comparatively simple matter to drop the mail-bags to earth.

**L**AKE ERIE, too, offers generous field for the mail-plane. The waters of this inland sea are a clearing house for perils of the postal routes. Important communities are located on the numerous islands lying opposite Sandusky, Marblehead, and other points on the Ohio mainland. To serve these islands with their winter mail involves grave risks. The

drifting ice-field in which they had become wedged. They were swiftly carried down the lake and the islanders gave them up as lost. As a final resort a cable message was sent to Kelleys Island.


"Look out for the mail-carriers," the message read. "They are fast in the ice and drifting your way."

Rescue parties were swiftly organized. Operations were concentrated at a point at which the drift was nearest shore, and here the brothers were rescued. Assistance came none too soon. The two men were exhausted and helpless. Their caps were frozen to their heads and their cloth-

flat-bottomed skiff. For sailing in open water or on smooth ice the boat carries a sail. On the bottom are iron-shod runners for sledding. The sides are sheathed with galvanized iron as protection from the knife-blade edges of thin ice. Without this sheathing the ice would make short work of the wooden shell.


**P**ICTURE the condition of the isolated Lake Erie communities under a system of air-mail transport. Instead of facing the dangers of ice- and storm-swept seas, the carrier would cross the water at an altitude insuring complete independence of surface perils. Instead of drifting ice cakes he would have a clear airway. The present journey of hours would be covered in a matter of minutes.

Still another section where severe winters are a bitter enemy of the heroes of the mail service is South Dakota. Here one of the most daring of carriers was Reinhold Dreahn, who fought for many years, falling at last before the overwhelming forces of cutting wind and bliz-

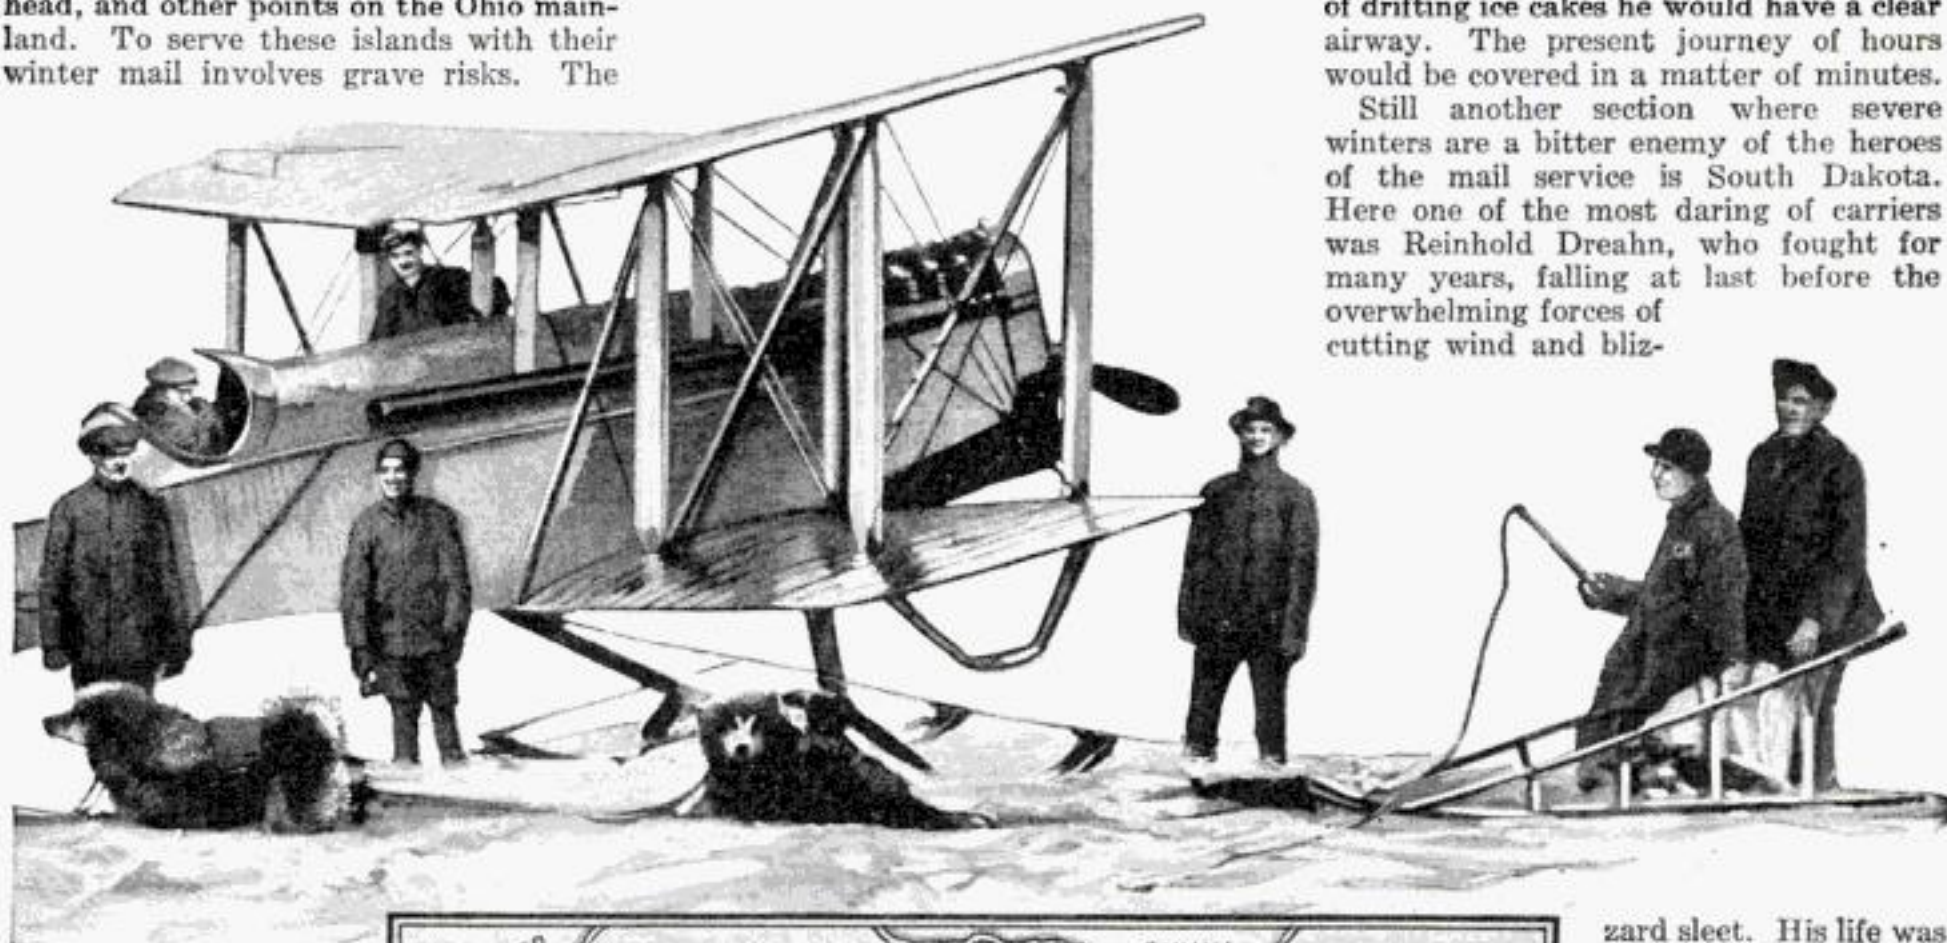

### Old and New

Above is Alaska's first air-mail plane, and beside it is one of the dog teams that it is replacing. Experimental air-mail service between Fairbanks and McGrath—a distance of 300 miles—has proved that what formerly was a perilous 35-day trip by dog sled can be completed now with safety in less than six hours.

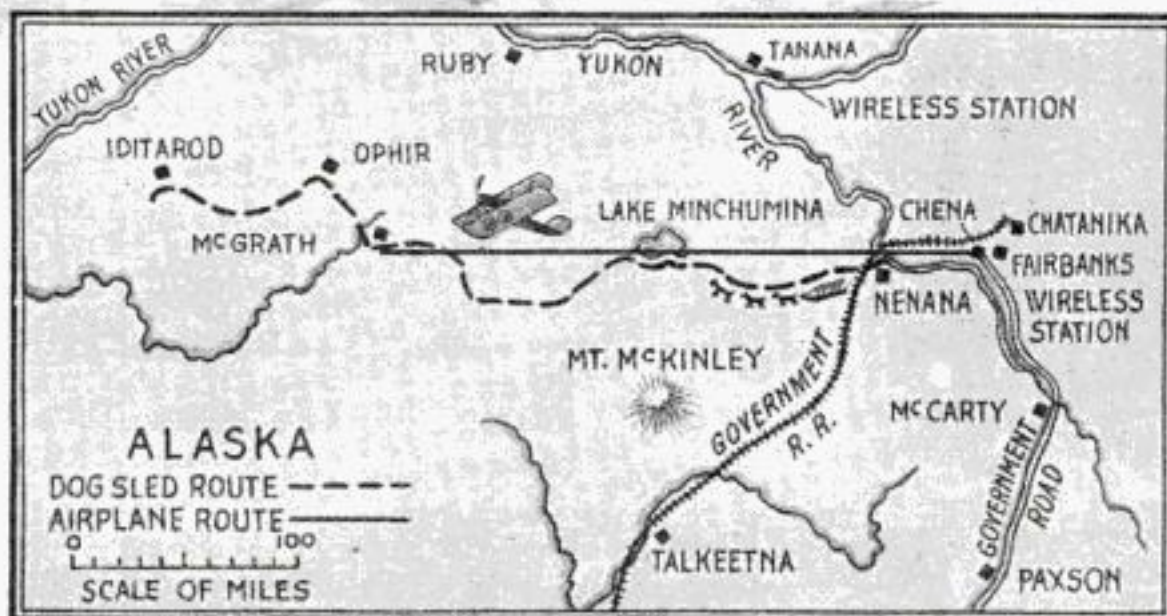

Map showing the direct 300-mile air-mail route between Fairbanks and McGrath, Alaska, as compared with the winding and much longer dog-sled route that it replaces.

dramatic adventure of the Hitchcock brothers is a living tradition with the islanders. The incident happened some winters ago, but it is still told as an example of what the carriers must face.

The Hitchcocks had started for some of the smaller islands when they were caught in a violent storm and a heavy sea of running ice. They could do nothing but run with the gale and the perilous

ing so completely covered and weighted with ice that they could not move. More than a bushel of ice was chopped from their garments after the rescue.

The ironclad is one of the institutions of Lake Erie. Perhaps it is best described as a combination sailboat, rowboat, ice-yacht and sled. When it can't be moved as one, it becomes another. In a single journey it may be all four. The craft is a

zard sleet. His life was an endless chain of journeys between the post offices at Murchison and Buffalo. Storms found him unafraid. His one creed of service was that the mails must move—the creed that finds unfailing expression in the work of the postal servants everywhere.

One Saturday afternoon last winter Dreahn left Murchison for Buffalo on his semi-weekly trip. A fierce snowstorm was raging. With nightfall the cold became intense. Buffalo

knew the man and his record and awaited his arrival with quiet confidence.

But when on the Sunday Dreahn failed to appear, all Buffalo became anxious, and searching parties were organized. It was too late. Dreahn had made his last trip. He had fought his way to within a few hundred yards of the town, only to lose the struggle in sight of safety

(Continued on page 155)



# First Aid for Your Family

What you should keep in your medicine cabinet for every emergency—How to safeguard against mistakes

By John F. Anderson, M.D.

**W**HEN you open the door of your medicine cabinet, what do you see on its narrow shelves? Do you see articles that should be there for every possible emergency, and of which your family physician would approve; or do you see articles he would not approve, and many of which may be dangerous or at least unsafe?

The medicine cabinet should be well stocked and well lighted for any emergency, says Doctor Anderson



The daily papers tell us too often the story of what has happened to some one, usually as the result of a night call on the contents of the medicine cabinet, because there was included a dangerous drug among the real household emergency products of harmless character! Some member of the family, groping around in the dark, picks up the wrong bottle, and the mistake is not discovered until it is too late.

These deplorable and preventable accidents usually

are due to the inadvertent swallowing of either one of the coal-tar disinfectants such as carbolic acid, cresol or the like, or tablets of bichloride of mercury.

Dangerous drugs should be banned from every household medicine cabinet. The household medicine cabinet should be in the best lighted part of the bathroom, and so placed that when the mirror-fronted door is open, a light shines full upon its contents. It should be painted and kept in spotless white, and its shelves preferably should be of glass.

What should we find on the shelves of this household emergency drug-store?

Suppose we start our list with those products that may be used for the relief of indigestion and constipation, the two great American complaints. Sodium bicarbonate should be there for the first of these: A liberal pinch in half a glass of

water is a good remedy for "heartburn" and other symptoms of indigestion.

Bicarbonate of soda also relieves the sting of insect bites, eases the pain of superficial burns; may be used in solution as a gargle for a sore throat, and in a bath for tired feet. Truly this is the most useful of the contents of the medicine cabinet.

For the relief of sluggish bowels or habitual constipation, there should be mineral oil, or liquid petrolatum, as the doctors call it; Epsom salts and castor oil (the tasteless kind for children).

**A**S WE have banned carbolic acid and the like, as well as bichloride of mercury, we should replace these dangerous disinfectants by others. In their place let us put in tincture of iodine to be used as an application to cuts and wounds before the doctor arrives; chloramine-T as a general disinfectant and dressing for wounds of various kinds, particularly infected ones; boric acid as a prophylactic antiseptic and particularly for use in a solution as an eye wash, or douche.

We must not omit a benzoinated cream to be used for the relief of chafing as well as chapped hands and lips, and as an application to insect bites.

A tube of analgesic balm will often be found useful for rubbing in cases of neuralgia or lumbago, over bruises, painful and swollen joints, and as a counter-irritant in general.

Milk of magnesia is recommended by dentists as a mouth wash and by physicians as an anti-acid and mild laxative; it should therefore be in the medicine cabinet. For solutions to be used as gargles, bicarbonate of soda or a solution of sodium chloride or table salt will do well.

While persistent headaches give warning that there may be some organic condition requiring the advice and services of a physician, there are nevertheless times when there is need of something to relieve a headache or pain of a severity and extent not requiring the services of a doctor. The best all-round product to include in the medicine cabinet for this purpose is aspirin.

For these uses the old-time medicine cabinet was likely to contain acetanilid or phenacetin or even something more harmful; but aspirin has largely displaced them. Aspirin now is prescribed in the early stages of a head

(Continued on page 156)

## For Your Shelves

The following list was compiled by Doctor Anderson, who formerly was Director of the Hygienic Laboratory of the U. S. Public Service, and who now is Director of the Biologic Laboratories of E. R. Squibb & Sons, New York City.

**Sodium Bicarbonate**—For indigestion, insect bites, slight burns, sore throat, tired feet.

**Epsom Salts and Castor Oil**—For constipation and as a laxative.

**Tincture of Iodine**—An emergency disinfectant for cuts and wounds.

**Sterile Bandages and Gauze**—For dressing wounds in emergency.

**Boric Acid**—Eye wash or douche.

**Benzoinated Cream**—Relieves chafing, chapped hands, or insect bites.

**Analgesic Balm**—For neuralgia or lumbago, bruises, painful and swollen joints.

**Milk of Magnesia**—Mouth wash, mild laxative.

**Aspirin**—For headache or head cold.

**Zinc Ointment**—To relieve skin inflammation caused by poison ivy or poison oak.

**Aromatic Spirits of Ammonia**—For fainting, nervousness, or giddiness.

**Thromboplastin**—For nose-bleed.




# Gay Deceivers among the Insects

## Nature's Clever Camouflage Protects Them from Enemies


**T**HE world's foremost artisan in camouflage is Nature herself. To protect her creations she has endowed them with amazing tricks of deception. There are plants that entice unsuspecting insects to destruction by alluring flowers and imitation drops of honey. In the sea are countless creatures that conceal themselves from their enemies by transparency or by changing their colors. On land and sea are other creatures, naturally harmless, that are made to appear ferocious.

Among the insects, an astonishing example of this protective deceit is the butterfly pictured at the right. This butterfly is protected from birds that are the prey of owls by the markings on its wings resembling the face of the owl. You will see how striking this resemblance is if you turn the picture so that it is upside down.

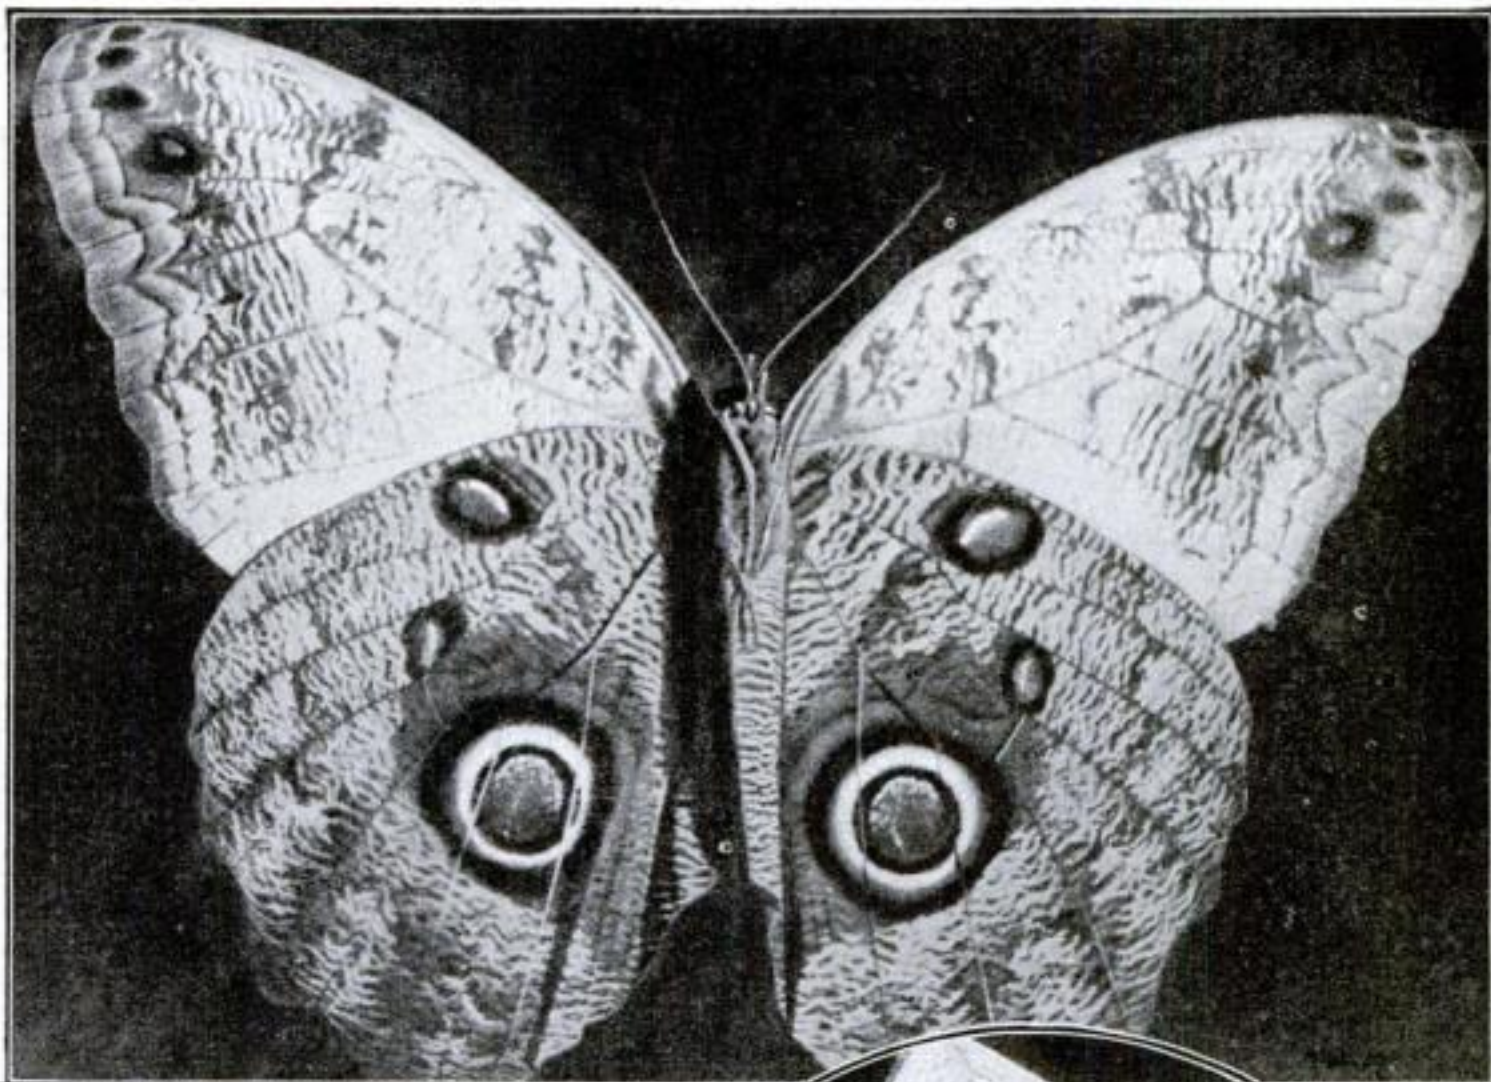

Courtesy Educational Film Exchange, Inc.

Look at the twigs in the photograph below and see if you can find an insect. If you examine them carefully, you will see one long stick with legs and antennae. This is the *Bacillus rossii*, commonly known as the "walking-stick." It belongs to the grasshopper family, and is the color of tree-bark.

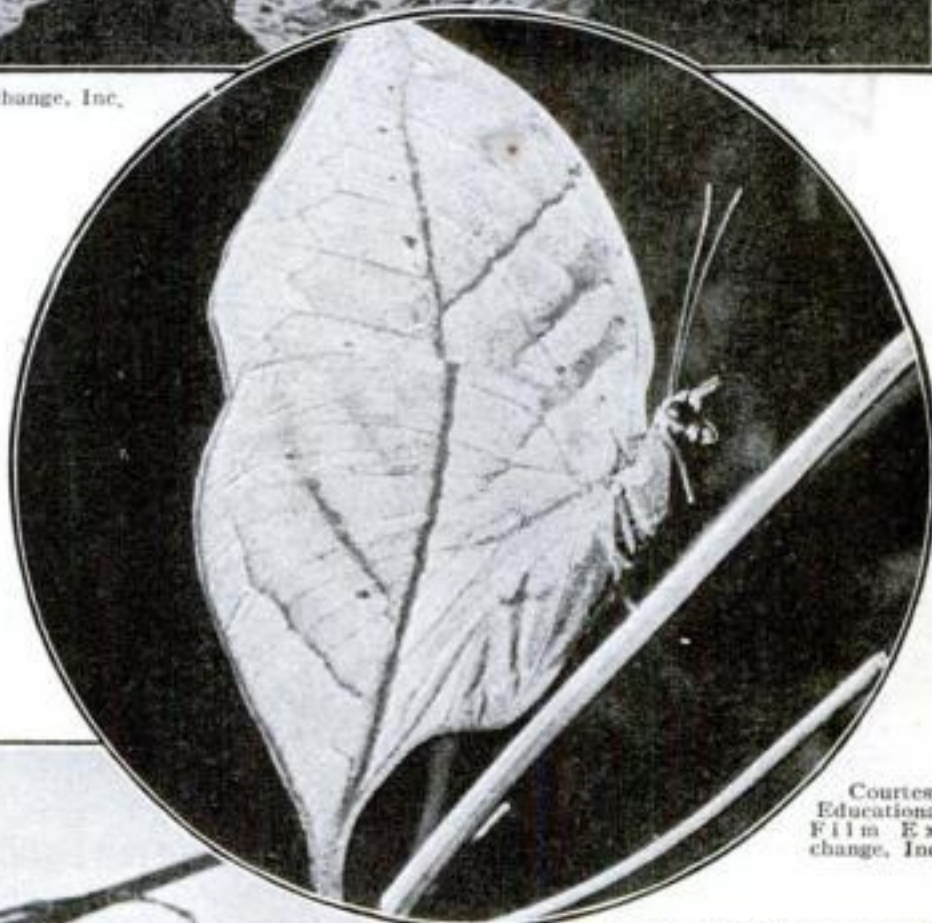

Courtesy Educational Film Exchange, Inc.

At first glance, would you believe that the tree trunk pictured above held one of the gayest of moths? When in flight the *Catocala* flashes brightly colored blue hind wings; but as soon as it comes to rest, these brilliant wings are concealed beneath dingy fore wings that almost exactly match the bark of a tree. In this way, it can rest with the assurance of comparative safety from the birds that prey upon it.



You would have to look twice, wouldn't you, to tell that the object pictured above was other than just a plain leaf? This is one of several species of butterfly that are protected by their wonderful imitation of green or dead leaves. The camouflage is so realistic that even the nerve veins running through the wings duplicate the veins of a leaf. In some cases the butterflies appear to be weather-worn leaves.

26992



# Crash of Electrons Heard

How invisible bombardments by the smallest particles of matter are magnified a million times—Seconds split into a billion parts—

A promising treatment of tuberculosis—Other important new mileposts in the march of science

**E**XCEEDINGLY faint sounds often are compared with the drop of a pin. Can you imagine, though, listening to sounds beside which the impact of a pin on a soft rug would be like a clap of thunder?

Two American scientists did just that recently, when they devised an apparatus by which they were able to hear electrons, which, as you know, are the smallest known particles of matter—infinitesimal charges of electricity so tiny that their exact size could scarcely be computed if we were able to divide a millionth of an inch into a million parts.

Dr. A. W. Hull of the General Electric Company, Schenectady, N. Y., and Dr. N. H. Williams of the University of Michigan, are the two scientists who have succeeded in listening to the inaudible. By means of a vacuum-tube amplifier, they heard in a loudspeaker the bombardment of electrons against the plate of a vacuum tube.

Such laboratory feats are highly important in bringing us closer to a knowledge of the exact nature of that mighty force electricity, of which, science now tells us, our whole world and all it contains are composed.

## A New Weapon

**W**ITHIN a short time there will arrive in the United States from Denmark a supply of a chemical preparation that may prove to be one of the most important contributions ever made to the science of medicine. It is a treatment for tuberculosis, developed by Dr. Holger Mollgaard, professor of physiology at the Agricultural College of Copenhagen, which is said to have been employed successfully in clinical use by its discoverer.

It is for the purpose of permitting the United States Public Health Service to subject the compound—called "sanocrysin"—to thorough test that a supply of it is being shipped to this country.

The preparation is a solution of a double salt of gold and sodium with

thiosulphuric acid. The treatment consists of injecting the preparation into the veins or muscles. It is said to penetrate animal tissues quickly, thus reaching the tubercular clusters rapidly, and to act on the bacilli with sudden and deadly effect. Its destructive powers are said to be so rapid, in fact, that this in itself offers a danger to the patient, for the poisons from myriads of dead tubercle bacilli piling up in the system constitute a deadly menace. To counteract this toxic effect, however, a serum has been devised, which is reported to be entirely efficacious.


However, conservative physicians, mindful of the failure of other loudly heralded medical discoveries, are seeking to prevent the hopes of tuberculosis sufferers from being raised too high until the new treatment has proved itself.

## Other Universes like Ours

**H**ERE and there in the sky are hazy patches of light, which astronomers call "spiral nebulae." Just what they are, astronomers never have agreed, some holding that they are other faraway "universes" or stellar systems like the one of which our earth is a part, while others have contended that they are within our universe, about as far distant from us as our faintest stars.

A discovery in support of the first theory was made recently by Dr. Edwin Hubble, of the Mt. Wilson Observatory in California, who announces that his investigations show the spiral nebulae actually to be independent universes—suns, stars, and planets such as those of our universe—and six quintillion (6,000,000,000,000,000,000) miles or more away from us.

Such figures mean little to us. We can, though, understand Doctor

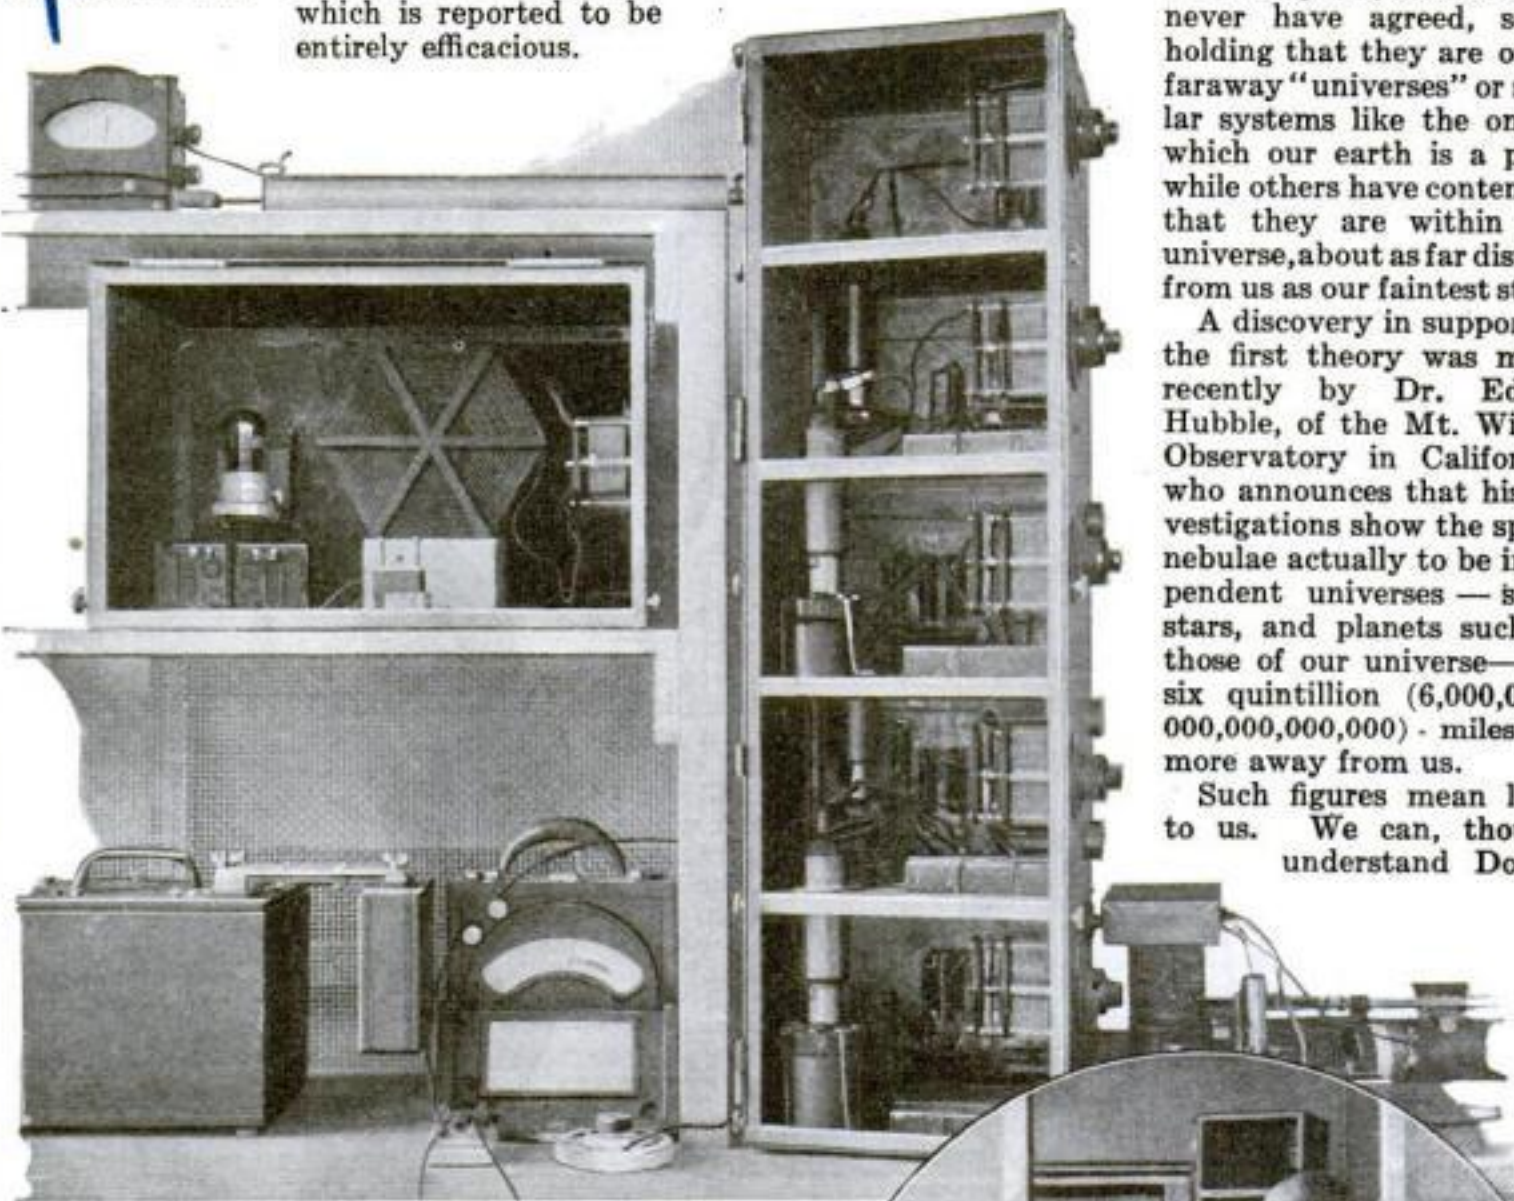

**Amplifier Magnifies Sounds a Million Times**

With this vacuum-tube amplifying apparatus, Dr. A. W. Hull, of the General Electric Company, and Dr. N. H. Williams, of the University of Michigan, listen to the noise of electrons as they bombard a vacuum-tube plate

Reports from Denmark assert that "hundreds of cases have been treated successfully in Copenhagen hospitals, some of them being persons in the advanced stages of the disease." Dr. Allen W. Freeman, of Johns Hopkins Hospital, who visited Copenhagen recently, has reported to the annual conference of Ohio Health Commissioners that he observed the treatment being used with apparent success.



Doctor Williams before the loudspeaker, listening to the sounds made by the smallest known particles




Hubble when he says that the light from the spiral nebulae, traveling 186,000 miles a second, takes one million years to reach the earth! In other words, his computations were based on light waves that started toward the earth a million years before his telescope was mounted, and have just now reached here.

He does not say, however, that these inconceivably distant objects mark the limits of space. Other galaxies of stars—other universes—probably are still more remote, he says, and appear smaller in consequence.

### Smallest Time Measurement

**S**PLITTING seconds into a billion parts was the amazing accomplishment announced recently by Prof. Paul Heymans, professor of theoretical physics at the Massachusetts Institute of Technology.

After a gasp of astonishment that any one could make a measurement so minute, the natural question occurs: What of it?

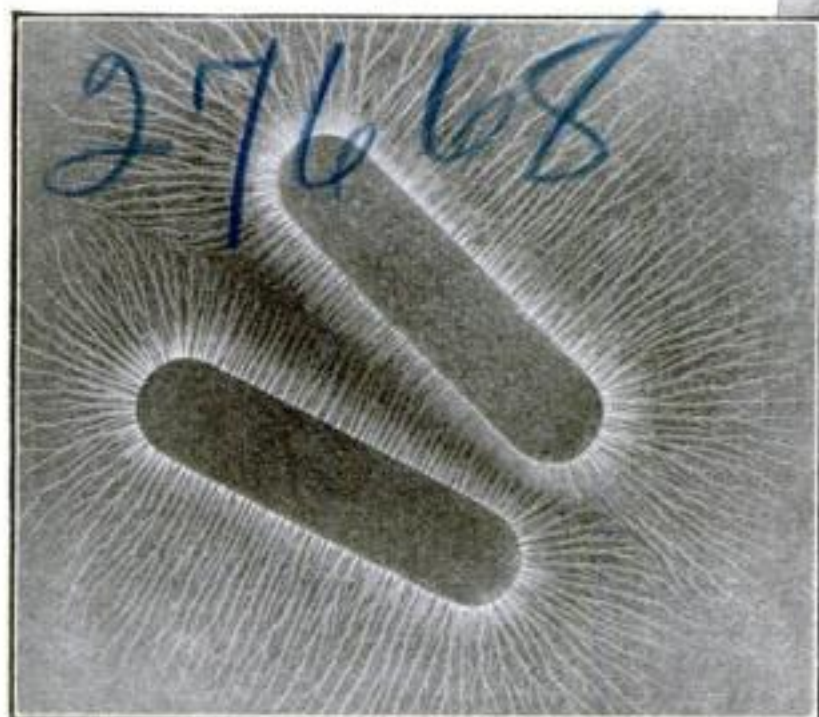

What use shall we ever have for a method of measuring a billionth of a second, or one-hundredth of one-billionth of a second, as Professor Heymans thinks we may detect soon?

One of the possible uses might be to determine the difference in time it would take for two bodies of the same shape, but of different materials, to fall from the same height.

This would throw tremendous light upon our knowledge of what is inside the earth. For a long time geologists have based their theories on the assumption that all materials fall to the ground from the same height in the same time. But by means of the new instrument, it may be learned that the force of gravity varies in different substances. If it is true that the gravity pull in the earth varies toward different objects, this knowledge would be tremendously important in determining conditions in the interior of the earth, and might prove of great consequence in studies of earthquakes and eruptions.

Another application of the time-splitting device might be to determine in which mediums electricity travels fastest. This would be valuable in designing X-ray tubes where the velocity of electricity must be introduced to make a correct design. Studies might be made, too, of the actual mechanism of the conduc-

tion of electricity through solutions. This would prove of immense importance in the electrochemical and electroplating industries. This remarkable apparatus is a modification of one devised by Professor P. O. Pederson at the University of Copenhagen. The measurement is made by employing so-called "Lichtenberg figures," which manifest themselves when



Splitting a Second

Dr. Paul Heymans, professor of theoretical physics at the Massachusetts Institute of Technology (left) and his assistant, Nathaniel H. Frank, working at the laboratory apparatus with which they have succeeded in splitting a second into a billion parts. The measurements are made by means of so-called "Lichtenberg figures," shown in the photograph at the left, which are produced when an electric wave is reflected from an electrode by laboratory methods

© Keystone

an electric wave is reflected from an electrode. When two electrodes are placed side by side at a certain angle and distance, the Lichtenberg figures meet.

The position of the meeting line depends upon the time that has elapsed between the times that the electric waves reach the electrodes. The rate at which these figures are formed is so extremely large that intervals of time from one-thousandth of one-billionth of a second may be detected.

### A Radio Compass for Flyers

**A**NOTHER forward step in commercial aviation was taken a few weeks ago when Lieut. George W. Goddard flew in an army plane from Dayton, Ohio, to Moundsville, W. Va., through virtually continuous haze, guided entirely by radio compass, steering only in response to signals from transmitting stations at his starting place and destination.

The radio compass for aircraft was perfected by the Army Air Service and the Signal Corps. The pilot wears a close-fitting helmet equipped with ear phones, and his hearing of the signals is facilitated by long exhaust pipes that carry away the sound of the motor explosions. A 300-foot weighted wire, suspended from the plane, serves as an aerial, and the receiving set is "grounded" on the body of the plane. While the pilot remains on his course, he hears only a constant string of "dashes" from his radio receiver. Should he veer to the left, he is warned by hearing a

"dash" followed by a "dot" every 10 seconds. If he goes off course to the right, he hears "dots" followed by "dashes."

Lieutenant Goddard's flight was made on a direct beeline and in exceptionally fast time.

### Drops of Electric Fire

**G**LOWING, golden droplets of liquid fire, a new and spectacular type of electrical discharge, were discovered recently by Dr. Irving Langmuir, C. G. Found, and A. F. Dittmer of the research laboratory of the General Electric Company at Schenectady, N.Y. This phenomenon is expected to lead to a better understanding of what takes place in a vacuum.

The globules were observed when a trace of tungsten was introduced in a discharge tube filled with argon. They seem to have characteristics similar to those of ball lightning, to which so many peculiar antics have been attributed. The nature of the globules in this experiment, therefore, has led scientists to conclude that in the strange ball lightning there is an outer surface of positive electric charges within which are imprisoned negatively charged incandescent particles of matter.

The tube used in the experiment has a tungsten filament at one end, heated to a glow by low voltage. High voltage between the filament and a small plate electrode at the other end of the tube completes the circuit. Pure argon, an inert gas, is sealed in the tube at low pressure.

By altering the current passing through the tube, tiny particles of the tungsten filament are made to "sputter" into the argon vapor. This small amount of tungsten emitted produces an astonishing effect. When a magnet is brought near, droplets are formed. The size of these can be varied from the tiniest of drops to the size of a pea.





### Six Handy End Wrenches Assembled on Ring

A SET of six very serviceable end wrenches assembled on one ring forms a useful tool for work about the house or in the garage. The smallest fits hexagonal or square nuts measuring five-sixteenth inch; the largest is for five-eighth-inch nuts, while the other wrenches fit nuts of one-eighth-inch gradations between these two measurements.

The wrenches are handy for the car, the lawnmower, vacuum cleaner, radio work, and other purposes.

### Average Life Is 56 Years

THE average length of life in the United States now is 56 years, an increase of 15 years since 1870, according to a recent report of the U. S. Public Health Service. In the sixteenth century human life averaged only between 18 and 20 years.

### Automatic Signal Replaces Traffic Cop

BLOOMFIELD, N. J., is cutting down its police force by installing electrical automatic traffic signals. The "stop" and "go" signs revolve at regular intervals, which can be shortened or lengthened to meet the

requirements of any particular crossing. Tests have shown, it is said, that the signs will operate successfully and that they are sufficient warning for automobile drivers to know when they are supposed to halt. It remains to be seen, however, whether mechanical traffic officers of this kind will command the same obedience that a policeman will.

### Coastguardsmen Rescued 2462 Persons in Year

THE army of thousands of men of the U. S. Coastguard Service, who patrol our 13,000 miles of coastline as methodically as a ship's deck, constitute the most complete life-saving organization in the world. During the 12 months ending last July 1 men from coastguard boats and stations rescued 2462 persons from positions of peril. There was never a day in the year in which guardsmen did not perform some service to vessels or persons in distress.

Scattered along our coasts are hundreds of stations, fleets of boats, and wrecking machinery units, linked by telephones and by the new radio receiving and broadcasting stations. This vast machinery can be set in operation a few minutes after a distress signal is picked up from a ship at sea, and in this way any emergency can be met.

The old and the new in traffic regulation—a uniformed traffic cop standing beside the new automatic "stop" and "go" signal



# Better Tools and New

## A Portable Soldering Outfit for Linemen



How a lineman carries the portable soldering outfit on his back while climbing a pole



THIS portable, compact soldering outfit is said to enable telephone linemen to accomplish more work in a day and do it with more safety than by the older methods.

While climbing a pole, the lineman carries a tank of acetylene gas, a soldering iron, and torch attachments, all strapped to his back and out of his way. The outfit may be used for overhead line, or underground cable jobs.

The flame is easily controlled and not

affected by the weather, a valuable feature for linemen, whose most important work is often done in the worst weather, as thunderstorms and snowstorms are the worst enemies of telegraph poles and lines.

### Newest Rope Fire Escape, Has Safety Control



HERE is a new safety fire-escape device, consisting of a rope fitted with combination slide and clamping castings. In case of fire, the person trapped in a burning building uncoils the escape rope, and slides the casting along the rope so that it rests just below the window-sill.

A loop of rope fits around a person's body under the arms. Sliding down the rope, he governs his speed by manipulating a brake-control wheel on the slide with his right hand, while grasping the body of the casting with his left.



# Labor-Saving Methods

## Fighting Perilous Mine Dust with Cannon




**S**HOOTING at dust with a cannon is a new and strange method by which the Federal Bureau of Mines expects to reduce the annual appalling death toll in mines caused by the many coal-dust explosions.

The dust cannon is mounted on a mine car and moved quickly to any part of a mine where danger is believed to be imminent. The gunner fires a charge of black

powder, sending the dust, if there is any, spraying in all directions.

The seriousness of the inflammable dust menace is being realized more and more, and the government is experimenting with many devices to fight it. The dust cannon shown in the photograph is considered especially practical because of its compactness and the ease with which it can be moved.

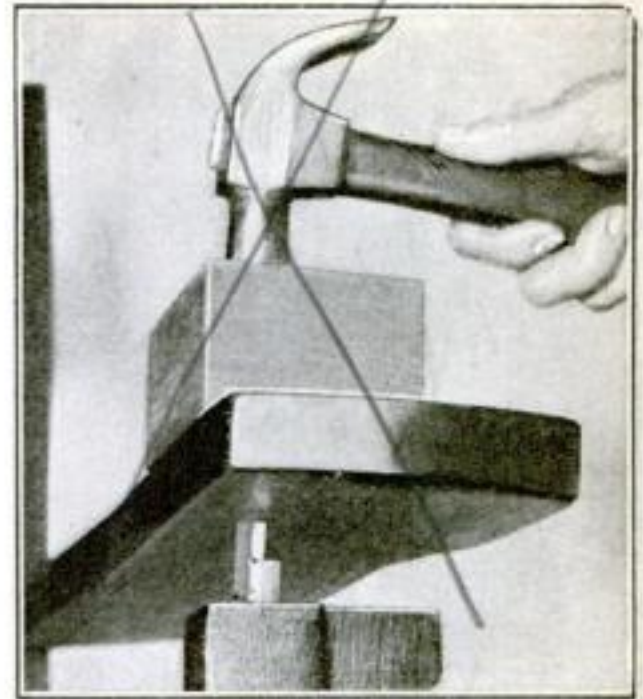


## A Simple and Easy Way to Mend Shaky Chairs

**F**IRST aid to shaky furniture comes in the form of small pen-shaped metal pieces that fix loose chair parts permanently and without nails or glue. The metal piece is inserted in the rung or loose arm piece, and driven in as shown in the illustration.

## Cheer for the Low-Brows

**I**F YOU have a low brow, it is no sign that you are less intelligent than a person with a high brow, according to Dr. Alo Hrdlicka, curator of physical anthropology at the National Museum, Washington, D. C.

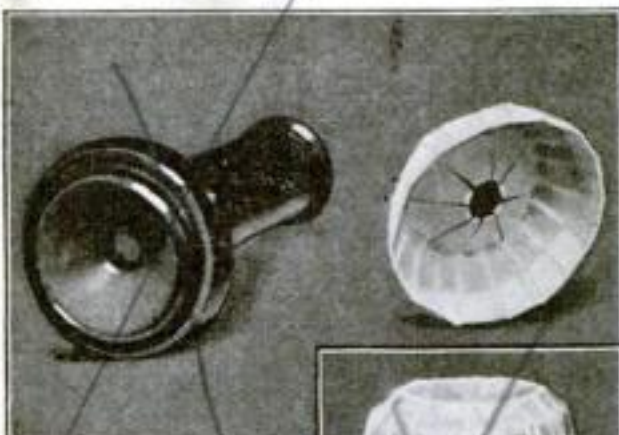

Protector removed

## A Sanitary Earpiece

**T**HE principle of the sanitary paper drinking cup has been applied to the telephone receiver by José A. Dominguez of Mayaguez, Porto Rico. The device, a sanitary ear protector for radio as well as telephone receivers, is cup-shaped, of strong paraffined paper crimped and pressed so that it will fit easily over the end of the receiver and stay in place without further attention.

Since the cost of each protector is exceedingly small, the inventor proposes that they be installed in public telephone booths and each used only once. Thus every user would be assured of a fresh and sanitary receiving earpiece.

After each telephone call, the old protector would be thrown away and a new one put on by each subscriber.



Protector in place

## New Office Desk Built on Sectional Plan

**B**UILDING your own desk to fit your own particular needs has been made possible by the recent invention of a sectional desk designed on much the same principle as the sectional bookcase. The units are manufactured in standardized dimensions so that filing cabinets and drawers of specified sizes can be installed as desired.

The foundation units of the desk are two low stools with four legs each. On the flat tops of the stools are placed the side cabinets and drawers, which are held firmly together by means of locking pins. On the cabinets rest the flat desk top, under the center of which is attached a

shallow drawer for writing utensils and other small articles.

The manufacturers claim that the units, when assembled, provide a substantial and durable desk for office use.



How the sectional office desk is assembled. Notice how the side cabinets rest on low, four-legged stools, and in turn support the flat top of the desk





### New Split Cane Rod for Deep-Sea Fishing

**E**IGHTEEN months are required to construct the newest type of deep-sea fishing-rod, designed by an English manufacturer especially for landing big game fish. It is known as a "split cane rod," and is equipped with an enormous brake reel fitted with a brake band not unlike that of an automobile. The brake is operated by a lever.

The rod has a core of highly tempered steel surrounded by two or three layers of cane strips. A cork handle is provided for a better hold.



### An Adjustable Desk Chair

**A**N OFFICE chair with adjustable back rest and narrow seat has been designed recently to enable desk workers to sit with correct posture and less fatigue. The chair automatically swivels to fit into the hollow of the back where support is needed. Each chair may be adjusted to suit the user.

# Novel Appliances

## Revolving Lamp-Shade Tells the Time—

**S**OME can tell time during the day by looking at the sun. Now, by means of a curious new invention, any one can tell time at night by looking at a lamp. It is a special sort of table lamp, with a shade that is turned by clock works contained in the base of the lamp. The shade makes one complete turn in 12 hours.

A pointer at the edge of the shade indicates the time as marked by perforated figures and dots on the shade. These are not conspicuous and at first glance a visitor would not suspect the double function of the attractive bronze-finished lamp.

This novel lamp-clock has a 21-day movement. A key for winding it is under the lamp base. It will be observed that the photograph was taken at 1.05 o'clock.



One-five by the lamp-shade clock

**T**HE world's record for bricklaying is claimed by a foreman bricklayer of Sheffield, England, who recently laid 809 bricks in an hour or more than 13 a minute.

## Complete Kitchenette in a Small Cabinet

**A**N ENTIRE kitchenette in what appears to be a refrigerator is a new convenience for those who happen to live in one or two rooms, but cling to their liking for home cooking.

A table providing room for three persons can be attached to one side of the cabinet, so that a meal can be served easily. An ironing-board, too, hangs on the back of the kitchenette.

Either electric stove or gas plate may be used for cooking. If electricity is used, opening the lid automatically connects the electric current, and closing the lid shuts it off. The stove is in a compartment at the top of the cabinet, while in the lower compartments are shelves to hold large cooking utensils and food containers.

Finished in wood tones or white enamel this compact outfit occupies about the same space as an ordinary easy chair.

On the inside of the front door hang other utensils: a rack for dish towels, and a small shelf for milk and cream bottles. This door is hinged in

the center so that when it is opened it swings outward, providing convenient access to the articles on the back of it.




These two photographs show clearly how the compact kitchenette appears when opened for use and when closed into a neat cabinet that occupies very small space in an apartment. Notice the cozy folding dining-table hinged to one side of the cabinet; also the compact stove compartment at the top of the open cabinet.



# for Every-Day Use

## Self-Standing Golf Bag Replaces Caddy

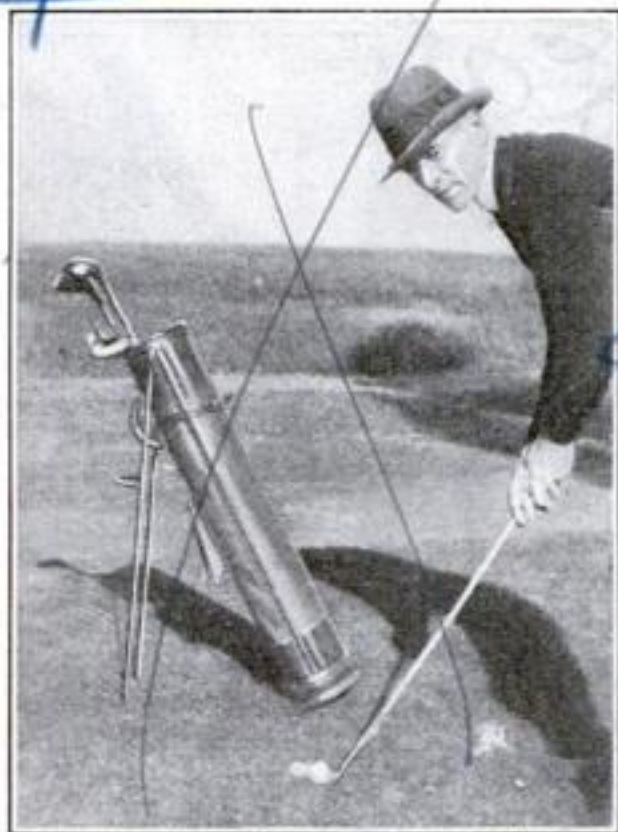

How the golf bag supports itself

**T**O ELIMINATE the bother of constantly picking up a golf bag after the completion of each stroke, when the caddy is not on duty, Robert L. Fargo, of Chicago, Ill., has invented a self-standing golf bag.

Two legs attached to the top of the bag are so arranged that they will swing out into place when the bag is tipped. Acting like the legs of a tripod, they hold the bag in a slanting position, keeping the clubs within easy reach and saving wear on the bag.

A CHEMICAL product resembling glass and useful for many of the same purposes recently was perfected by Fritz Pollak, a German inventor. It can be rolled, bored, polished or cut, without the tendency of glass to splinter. Because of this quality it is useful especially for automobile windows, optical instruments, ornaments, and toilet articles. The inventor arrived at this product by condensing carbamide and theo-carbamide with formaldehyde.



## A Compact Electric Motor for the Phonograph

**T**HIS new electric phonograph motor recently perfected is said to be the first of its kind that runs without belt, gear, or friction disk reduction. It has a direct drive and will run at a constant speed at the low rate of 40 revolutions a minute. Its maximum speed is 150 revolutions a minute.

The motor is very compact, small enough to be put into a portable phonograph outfit and powerful enough to run the largest phonograph. It operates on any 110-volt circuit.

## "Help Yourself" Service for Soft Drinks

**O**BSERVING the general popularity of "wait-on-yourself" devices in use in the larger cities, a New York inventor has produced a container for iced bottled soft drinks, from which the customer can choose for himself his favorite brand. He opens a lid at the top of the beverage dispenser then turns a handle, which revolves a tray inside, until the desired bottle is reached.

There is a bottle opener at the side of the dispenser. When the customer has opened the bottle and consumed its contents, he places the empty bottle in a compartment at the bottom of the dis-

penser, and pays the cashier his reckoning.

Besides giving more efficient service, it is claimed that this method of self-service lowers expenses for labor and cuts the cost of ice bills.

## New Needle-Guiding Button

**A** NEEDLE-FINDING button is a recent invention designed to make sewing on buttons less tiresome. The new button is said to save the worker's time by encouraging the needle to slide easily into the thread holes.

The under side of the button is molded in such a way that wide-mouthed channels guide the needle toward the holes. Instead of having perpendicular sides, the perforations are funnel-shaped with smooth and sloping sides, so that the needle glides readily into the proper place without hitch or hesitation. The arrangement of the holes also distributes the stitches over a wide area of cloth.

A cupped portion on the rear or cloth side receives the mass of thread that it is customary to wrap around the stitches passing through the holes. This makes it possible for the button to lie flat against the surface of the garment.



## An Auto-Cleaning Sponge that Stays Wet

**A** RUBBER sponge, kept wet by running water, is a new time-saving invention for cleaning an automobile. A rubber tubing is fastened to the sponge through a hollow handle and the other end of the tubing is attached to a faucet or garden hose. A small stream of water is sufficient to keep the sponge moist.



No attendant is required to dispense soft drinks, where this self-service apparatus is installed





# Oddities Picked up

Ukelele in Cane—Lifeboat on Wheels—

## Cane-Ukelele

A walking-stick that can be converted instantly into a ukelele is the work of Morris Rothman, of Bayonne, N. J., shown with his invention at left and below



## Ship Knees from Giant Roots

One of the oldest of crafts is that of digging ship knees—the wooden supports formed from giant roots, that are used in constructing the stem and stern of a wooden ship. The photograph shows the largest ship knee ever dug, eight feet eight inches thick at base. It came from a Pacific Coast fir-tree



## Old Railway Caboose a Monument

A railway caboose makes a strange monument, yet this one undoubtedly deserves such an honor, for in it, 41 years ago, was founded the Brotherhood of Railway Trainmen. The historic car was placed recently in an artistic concrete and tile pagoda in Neahwa Park, Oneonta, N. Y.



## Lifeboat on Wheels Launches Itself

This self-launching lifeboat was the center of interest during recent tests at Cleethorpe, England. The motor that drives the propeller also drives the self-launching mechanism which consists of a pair of wheels beneath the hull. The boat is 40 feet long

## Colonial Hammer

This quaint cobbler's hammer was used to repair shoes of Washington's soldiers at Valley Forge

© Keystone



## Operating on a Horse


An interested audience of veterinarians and farmers is shown at the right witnessing a demonstration operation at Purdue University, Indiana. The patient is a horse suffering from the polio, a disease that necessitates a difficult operation. The animal is strapped and chained to the operating table. Horses that once had to be shot now find their way to hospitals where they often are cured and saved for more years of service





# by the Camera Man

## Left-Handed Watch—Fireplace of Jewels

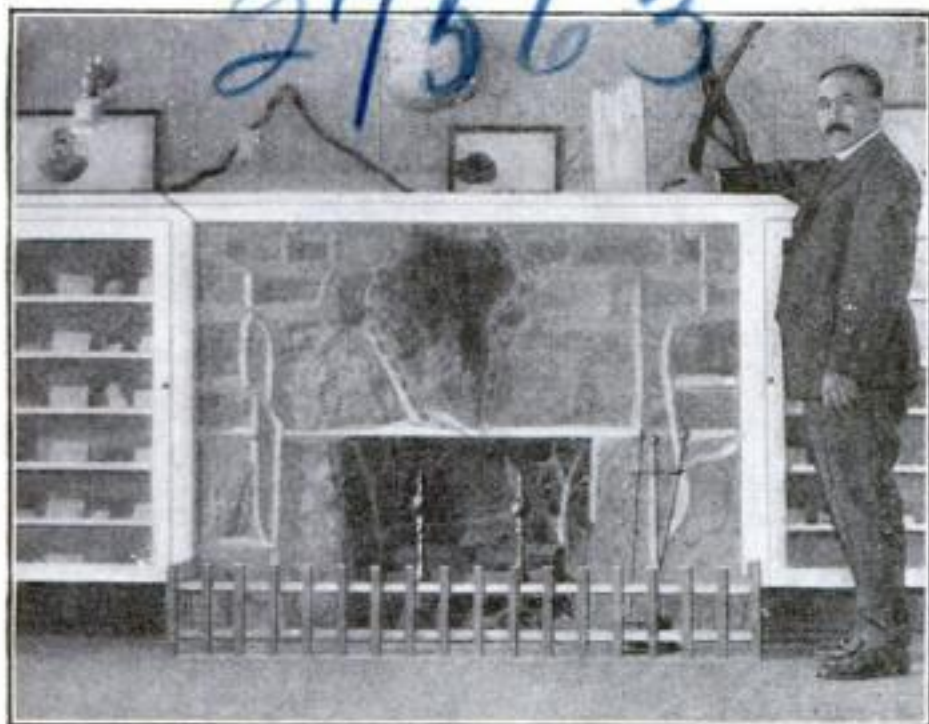

### A Fireplace Studded with Gems

Twenty-six different kinds of precious gems and metals are in the stones of a fireplace in the home of M. A. Barr, at Valley Forge, Pa. The central piece is a solid 300-pound lump of jasper. The stones were found recently on the farm of Mr. Barr, who is seen in the picture

### Runs Backward

A left-handed watch that runs backward is the work of Richard F. Mason, who is a jeweler of Columbus, Ohio




### A Stack of Horseshoes

This strange-looking stack is a pile of horseshoes removed during the last 11 years by three blacksmiths of Edwardsville, Ill., shown above



### China Has a Bridge of Porcelain

One of the world's most unusual bridges, near Peking, China, is made entirely of porcelain, each piece of which has been carefully hand modeled—a fact that goes far to explain its artistic lines and beautiful curves

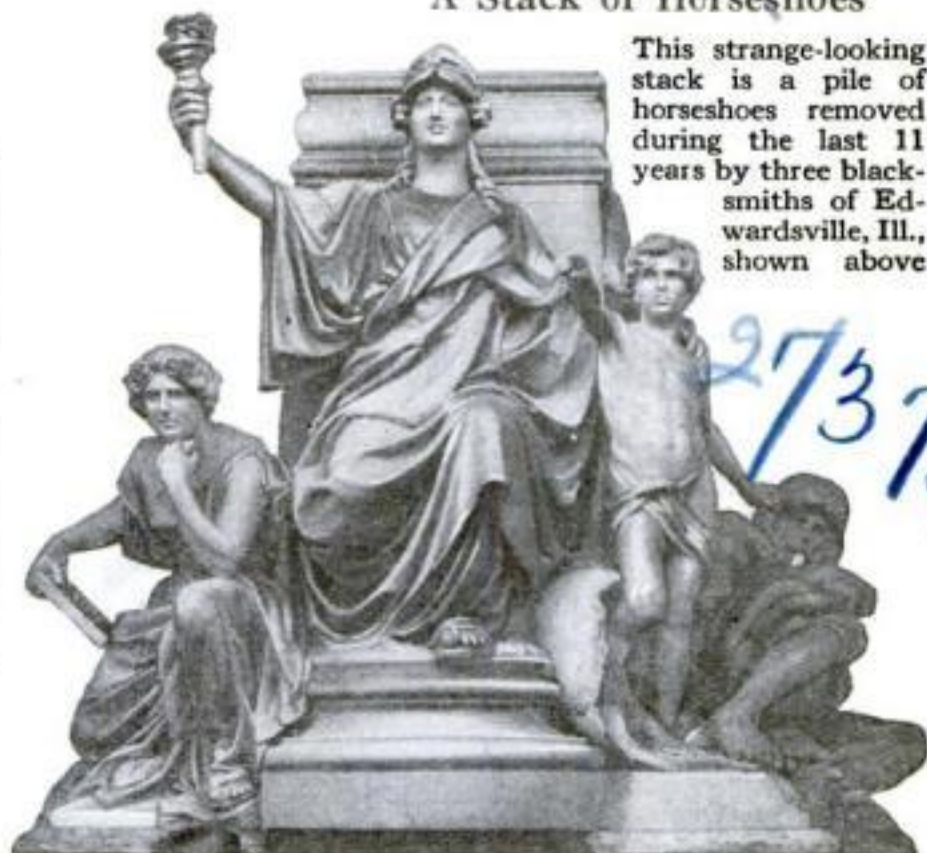

### "Science" in Sculpture

At the foot of a great statue of Christopher Columbus, made by Arnaldo Zocchi for the Argentine government, is this group depicting "Science." The central figure holds a lamp, depicting the search of scientists for hidden truth




### Cattle Cleaner

Show cattle always receive exceptional care. But it has remained for an Iowa cattleman to employ scientific dry cleaning on his animals. Before any of his herd enter a show or sales ring, the vacuum cleaner removes every speck of dust from their shining bodies




# Ten Ingenious New Unusual Machines and Engines Built

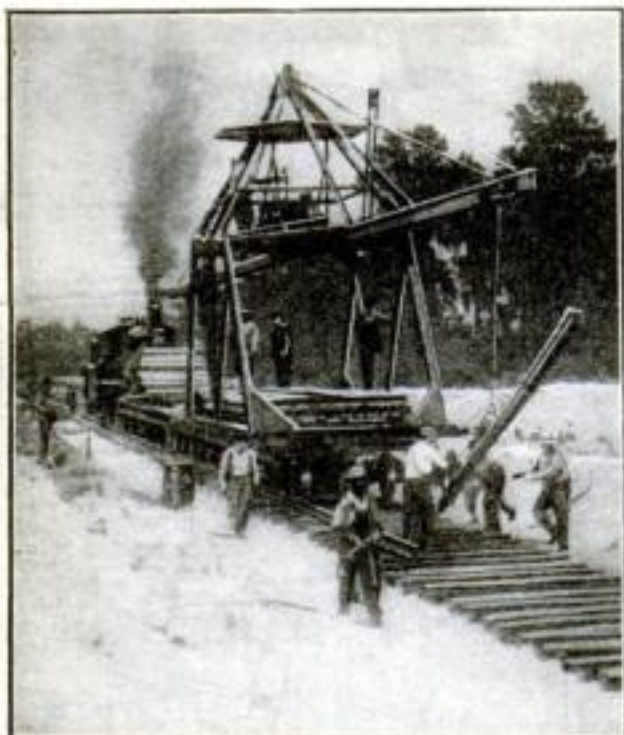

## Track-Laying Machine Aids in Railroad Building

THE size of railway gangs is said to be greatly reduced in southern Florida, where a contractor is employing a new construction outfit consisting of a locomotive and two flat cars loaded with ties, rails and a gas-driven traveling crane. The traveler picks up the ties and rails in bunches and carries them to the road-bed in front, where workmen lay them.

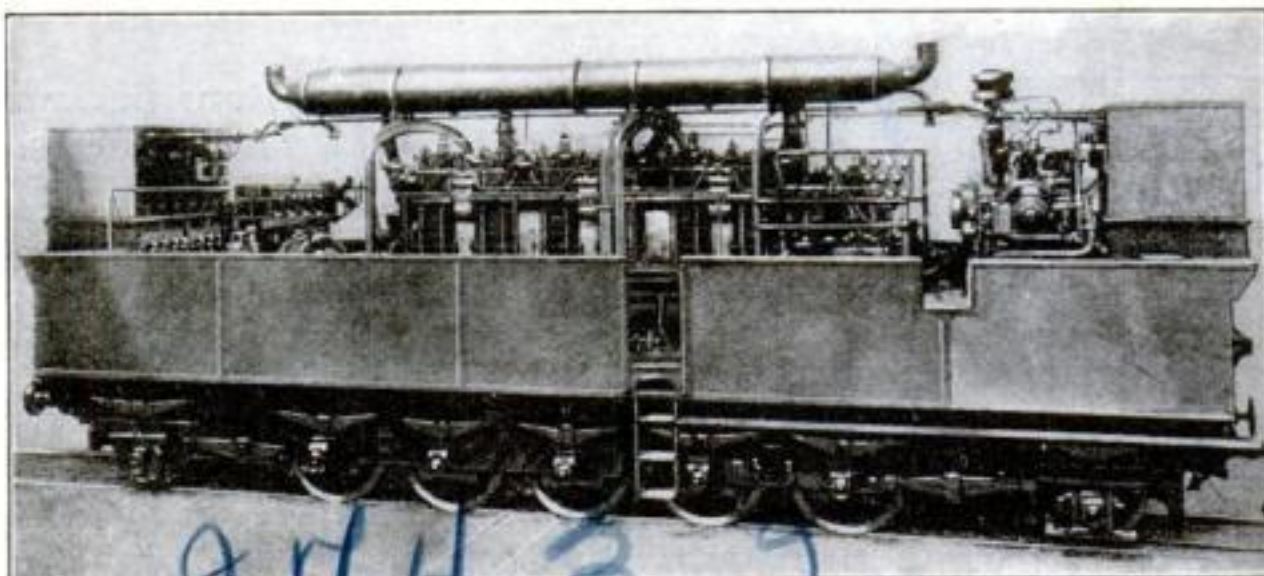

## Diesel Engine Runs Electric Locomotive

DUE to the necessity for coal conservation, European engineers have been striving for an efficient locomotive that would be run by other means than steam. Here is shown one of the newest designs, a Diesel electric locomotive built in Germany for negotiating more quickly and economically the vast stretches of territory on the Russian steppes.

The locomotive is equipped with powerful Diesel oil engines, which generate electric current to drive the locomotive. This transforms a railroad into an electric line.

## New Type of Lightship for New York Harbor

THE last word in lightships is the *Five-Fathom Light*, designed for duty off New York Harbor. Two mast lights will flash each night and powerful radio equipment will assist in protection of the great harbor's shipping.

This latest of Uncle Sam's coastal safeguards has a gross tonnage of 825, is 146 feet long, and has oil-burning engines.



## Electric Milk Truck Has Automatic Brakes

THE driver of this ingenious new electric milk wagon is his own self-starter and brake. He stands on the running-board as he drives from house to house along his route. As soon as he jumps off, freeing the platform of his weight, hydraulic brakes are applied automatically to the car.



## Milwaukee Railroad Plans to Electrify System

PLANS for electrifying the entire system of the Chicago, Milwaukee & St. Paul Railway, operating lines throughout the West, are being formulated by officials of the road, according to recent reports. The Milwaukee already operates 660 miles of electrified road over the Cascades and Rocky Mountains.

The vast new project is said to have had its origin in an offer by Henry Ford to supply power for the railway system from his hydraulic plant which is being completed on the banks of the Mississippi River at Minneapolis. To this plant the railroad has constructed a bridge across the Mississippi at a cost of \$3,000,000, and plans to handle the freight from Ford's accessory plants operated in connection with the electric power plant.


All terminal switching will be done by electric power when the project is completed.

## Electricity Replaces Steam in Road Roller

WHEN a steam roller belonging to an electric railway and light company in Milwaukee, Wis., needed extensive repairs, it was suggested that it be remodeled to use current from

trolley circuits operated by the firm.


The electric motor was mounted so that it drives the union formerly driven by the steam engine, and the electric roller is operating very successfully on streets where the car lines supply power.

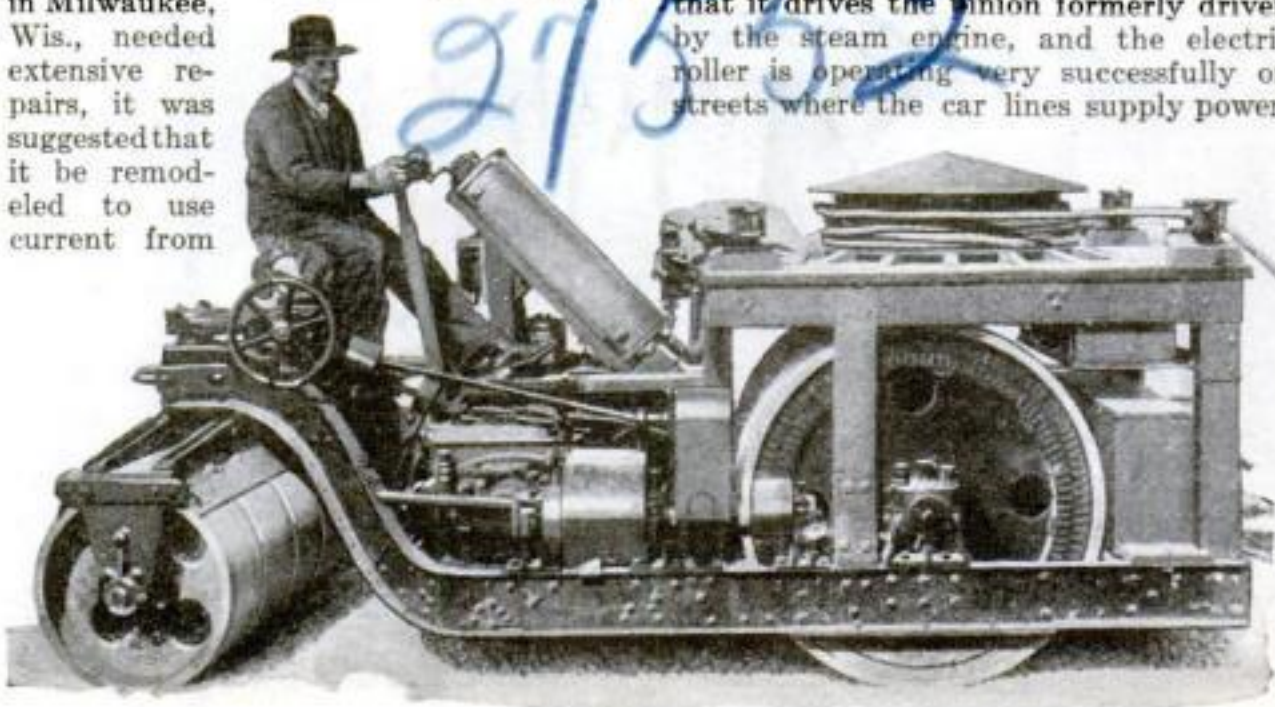



# Products of Mechanics

## to Increase Our Every-Day Efficiency

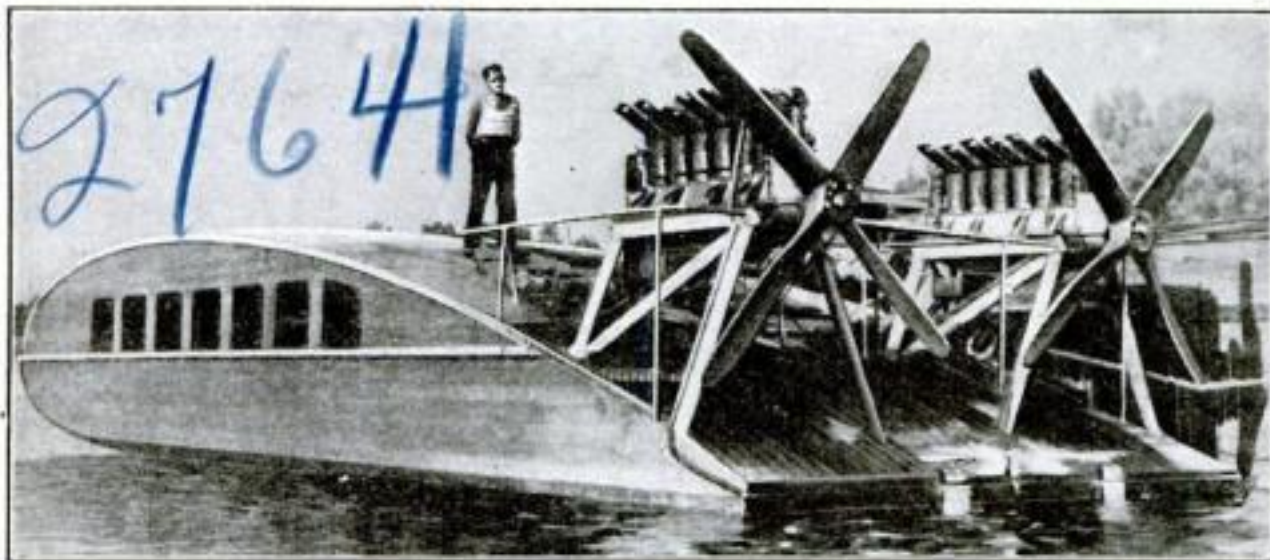


### Twin Motors Drive Streamlined Hydroplane

THIS strange craft, shown lying at anchor on the Danube River, is a giant hydroplane of unusual design re-

cently built in Vienna, Austria, for W. D. McDaniel, an American. It is run by two giant six-cylinder motors driving four-bladed propellers. It is said to be capable of developing 160 horsepower and very great speed. By having a streamlined body and shallow draft, wind and water resistance are reduced to a minimum. A roomy passenger cabin is provided behind the sloping bow of the craft.

### Huge Transformers Built to Test Insulators

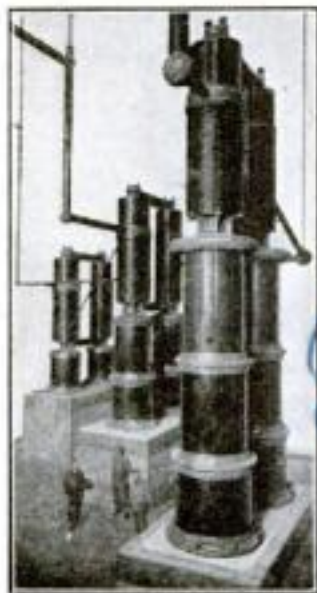

THESE three huge step-up transformers, capable of producing electrical tensions of more than a million volts, are part of the equipment of an enormous new all-metal electrical laboratory recently completed by the Compagnie Générale d'Electro Céramique at Ivry, France.

The laboratory was built to test electrical apparatus designed to withstand high voltages, particularly porcelain insulators. Note size of transformers compared with the men.

### Pumps Pour Lake Water into Dry River-Bed



IN WESTERN Nevada, engineers, by means of five gigantic pumps, recently supplied a dry river-bed with water, thus providing for the irrigation of 12,000 acres of land and saving crops valued at more than \$200,000.

The pumps were installed when the level of scenic

Lake Tahoe sank so low that the natural overflow of water into the Truckee River stopped entirely. They were set about 300 feet out in the lake, in three feet of water, and have kept a continual swirl of water going over the lake rim into the dry river-bed, pumping from 115,000 to 120,000 gallons of water a minute.


Since they were placed in operation, the pumps have lowered the level of the lake more than two feet.

### Odd Railway Car Propelled by Motorcycle

A NOVEL railroad inspection car propelled by a motorcycle was constructed recently in India. When the motorcycle, fitted with an eight-horse-

power engine, is required for use off the tracks, it can be detached from the truck in a few minutes.


When driving the truck, the cycle is carried on a small platform slightly lower than the truck platform at one side. The wheels rest in cradles shaped to fit the tires. After the cycle is in position, the driving chain is removed from the sprocket on the rear wheel and attached to a sprocket on the truck, and the truck becomes a power car.

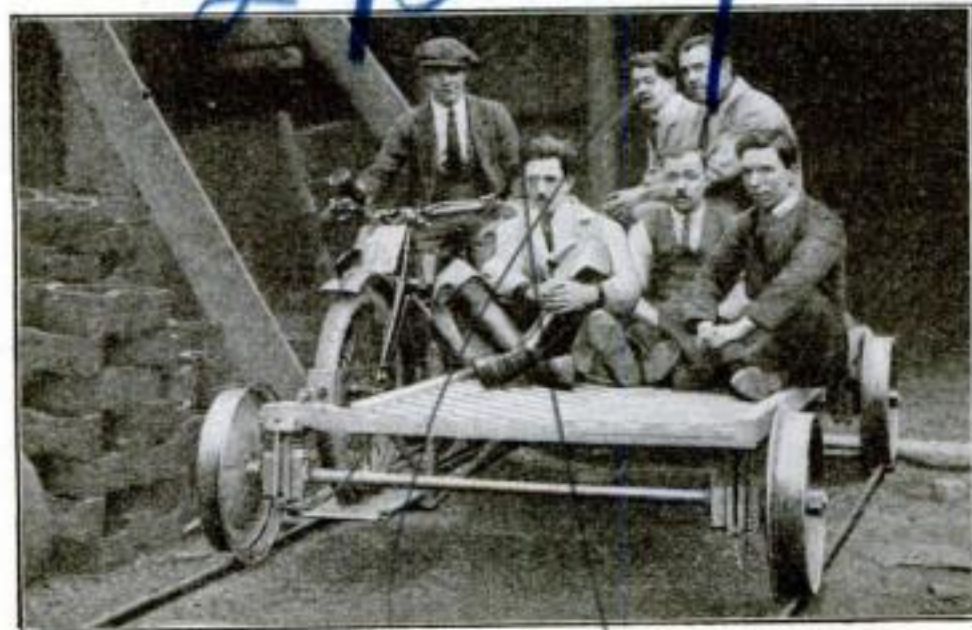

### May Revolutionize Motors

A GAS turbine engine that, it is claimed, may revolutionize automobile and airplane motors is being perfected by a French engineer. It is said to combine the advantages of the explosive gas motor and the steam turbine.

Recent tests before officers of the French Air Service, are reported to have given complete satisfaction, the engine turning smoothly at the rate of 1500 revolutions a minute.

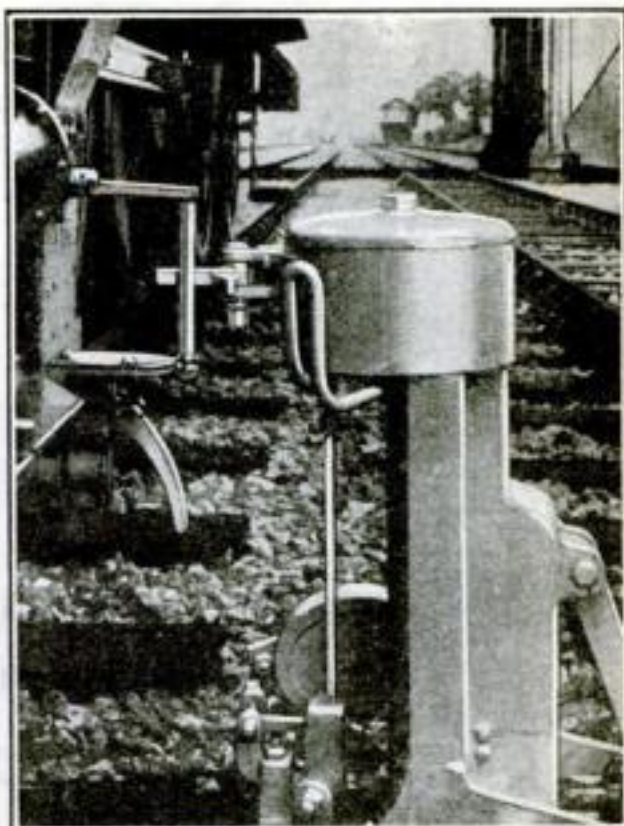


### Safety Stop Sets Engine's Brakes Automatically

THE automatic train stop pictured above, designed to prevent collisions, is the recent invention of British railway engineers. A projecting arm from a device at the side of the track strikes a prop held between two metal arms projecting from the locomotive. The upper arm drops, setting the air brakes of the locomotive.



## "John," a 150-Pound Dummy, Tests Air-Mail Parachutes

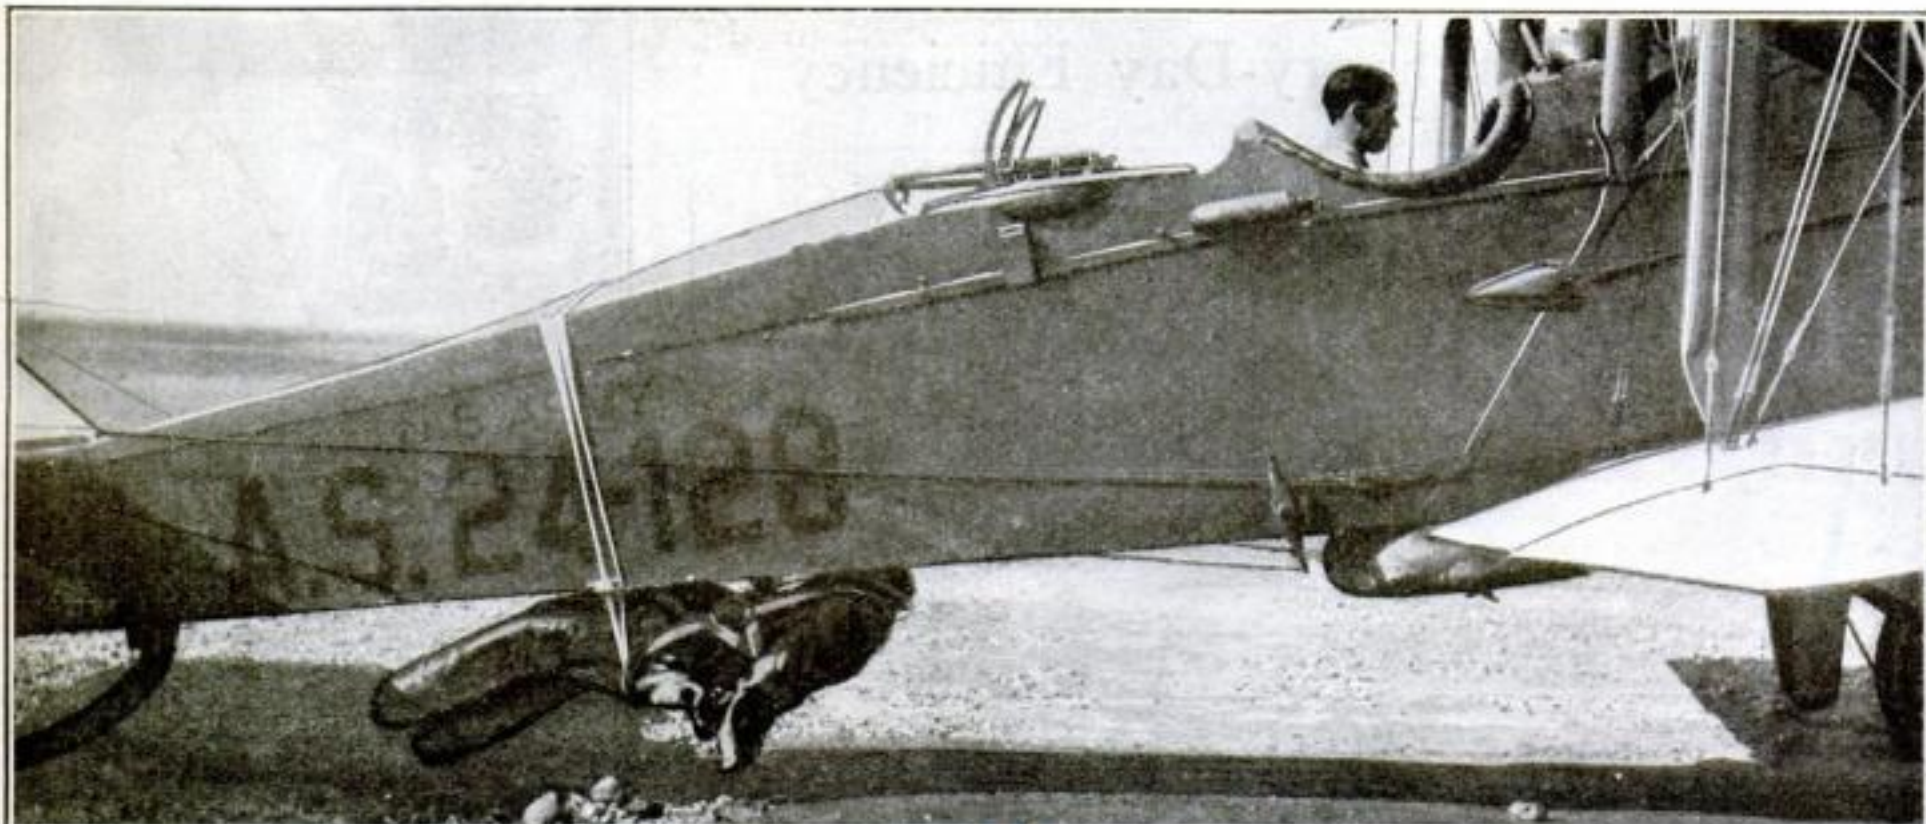

**U**NDER the fuselage of the airplane shown in the above photograph hangs "John," a 150-pound dummy, who has made more parachute drops than any other member of the government flying personnel. The man-sized dummy is used to test thoroughly scores of parachutes recently purchased for air-mail pilots who must fly often in extremely adverse weather conditions.

Using the Salt Lake City air-mail field as a base of operations, an army plane conducts the tests in which "John" is put through a grueling series of parachute drops. At an altitude of 2500 feet the dummy is cut loose, descending from a unique releasing device under the fuselage. If the parachutes pass the tests with the dummy, they are considered safe.

A NEW record for slowness in flying was established recently by Captain Leprier, a French naval officer, who piloted a specially designed machine at a speed of only 31 1/4 miles an hour.

## Smallest Airplane Weighs Only 221 Pounds

**H**ERE is what experts have described as the smallest practical airplane in the world. It is known as the "Hummer" and was flown at a recent air meet recently at Dayton, Ohio, by its builder, Bert Mix, an airplane mechanic.

The "Hummer" weighs only 221 pounds. It has a spread of 12 feet, goes 75 miles an hour and makes about 50 miles to the gallon.



The "Hummer," with its owner and builder, Bert Mix

## Homemade Metal Monoplane with Folding Wings Fits in Garage



The homemade monoplane at Logan Field, Md., following successful test flights. The plane was constructed entirely of duralumin. The wings can be folded for storing the plane

**A** HOMEMADE all-metal monoplane of duralumin, built in a back yard with comparatively crude tools, can be folded to fit in a garage. The designer, W. H. A. Boyd, of Baltimore, Md., did not know how to fly, nor did his father, W. B. Boyd, nor brother, C. M. Boyd, who helped him build it.

Lieutenant Leo. M. Willinger tried out the plane on Logan Field recently with great success. On two occasions he flew to an altitude of 2500 feet, and made a speed of 90 miles an hour.

Its low horsepower, 40, made rising from the ground difficult, but this is to be remedied by installing a larger motor.

A striking point in the construction of the plane is the absence of bracing wires. Made entirely of duralumin, the plane weighs only 800 pounds and has a wing spread of 30 feet. By removing two pins on each of the wings, they can be folded so that the plane can be stored or shipped easily. When folded, it is only seven feet wide. It can be knocked down in 15 minutes.




## Powerful Portable Searchlights Guide Air-Mail Fliers

**T**O AID United States air-mail pilots in making night landings, new portable searchlights recently have been installed at Crissy Field, San Francisco. On clear nights, it is said that pilots can see the piercing rays of these 450 million-candlepower lights when they are from 100 to 150 miles distant. The lights have 36-inch lenses.

Since the inauguration of night flying in the mail service, which has meant great economy to business in the United States on account of time saved in correspondence, many types of electric beacons have been tried out, some on high towers. The new portable type is expected to prove especially valuable since it can be moved about on the landing-field under varying conditions to the position most helpful to the landing planes.

To accomplish this, each searchlight is mounted on a wooden platform supported on a low metal frame with four automobile wheels. Hundreds of feet of cable that carries the current from power source to the light is wound on a reel at one end of the truck. This cable is paid out or reeled in as the searchlight is wheeled from one position to another.

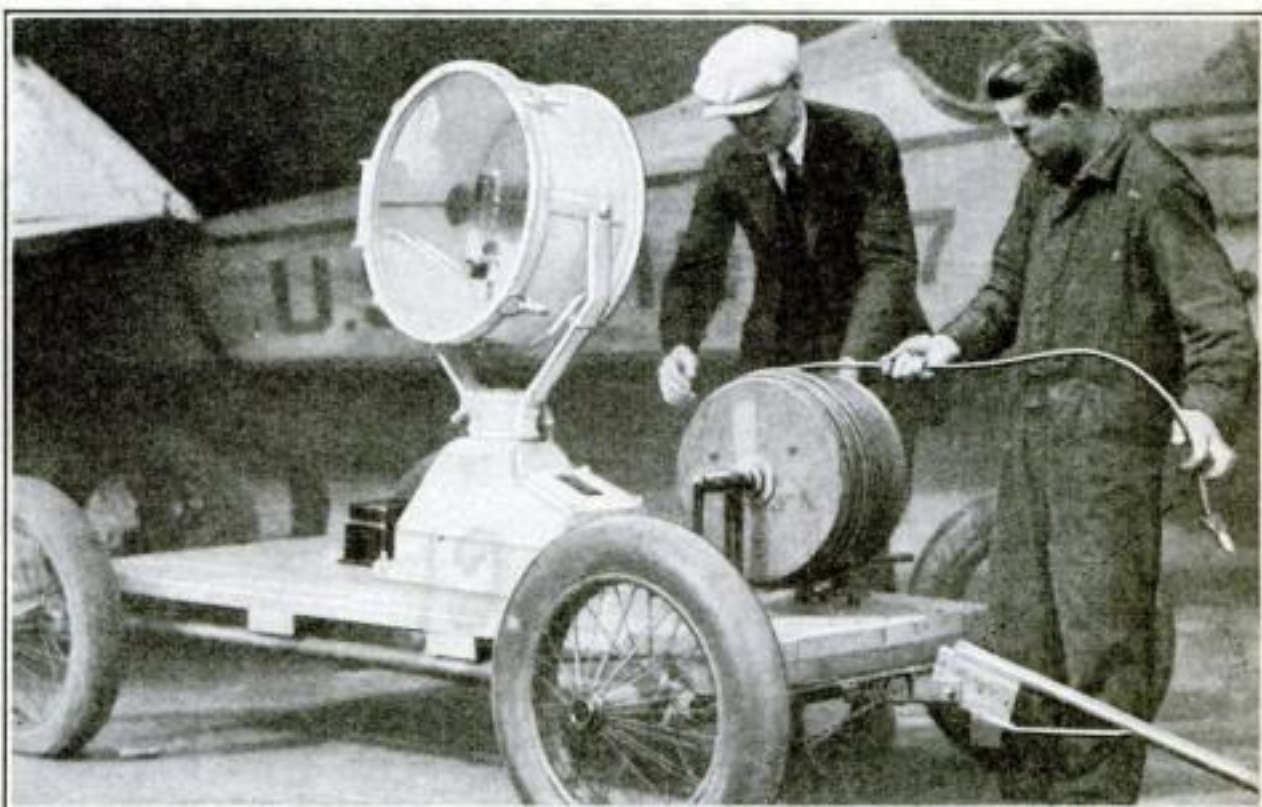

The new portable searchlight, showing the reel that carries the electric feed line

In the photograph above are seen two United States air-mail employees testing one of the lights at Crissy Field.

## British Government Orders Two Giant Airships

**F**OLLOWING a recent decision to redevelop airship transportation in England, the British government has just ordered the first of two giant dirigibles, each of 5,000,000 cubic feet capacity, for transportation of passengers and freight. One of the ships, it is understood, will fly on regular schedule from England to Egypt and India.

The cost of the first ship, it is estimated, will be about \$1,600,000. Its length will be 695 feet and its greatest diameter 132 feet. The contract specifies that the structure and other fixed weights must not exceed 90 tons. Its range will be 2500 miles, and it will be capable of carrying 120 passengers and 10 tons of freight. Beside 30 two-berth cabins along the sides of the vessel, there will be a smoking-room, a lounge large enough to dance in, a kitchen, and quarters for a crew of 40.

## Air Freighter Carries a 2700-Pound Cargo



**A**ERIAL freight-ing appears definitely to have outgrown the possibility stage. This sky cargo ship runs regularly between London and Paris, transporting perishable products and goods to fill special orders. It carries a cargo of 2700 pounds, or nearly 1½ tons.


The photograph shows how the airplane freighter is loaded.

## Aviator Builds Baby Monoplane and Flies to Height of 1800 Feet

**A** REMARKABLE new type of small, baby monoplane was completed recently by Edward F. Allen, a test pilot of Washington, D. C., who recently attained in it a height of 1800 feet.

Experts believe that one of the next important steps in aviation will be a small, inexpensive plane that can be kept in a garage and flown from a yard. This little plane is a distinct advance toward

that goal. It is equipped with a nine-horsepower motorcycle engine and weighs only 205 pounds, with a wing spread of 27 feet. It can make 63 miles an hour.

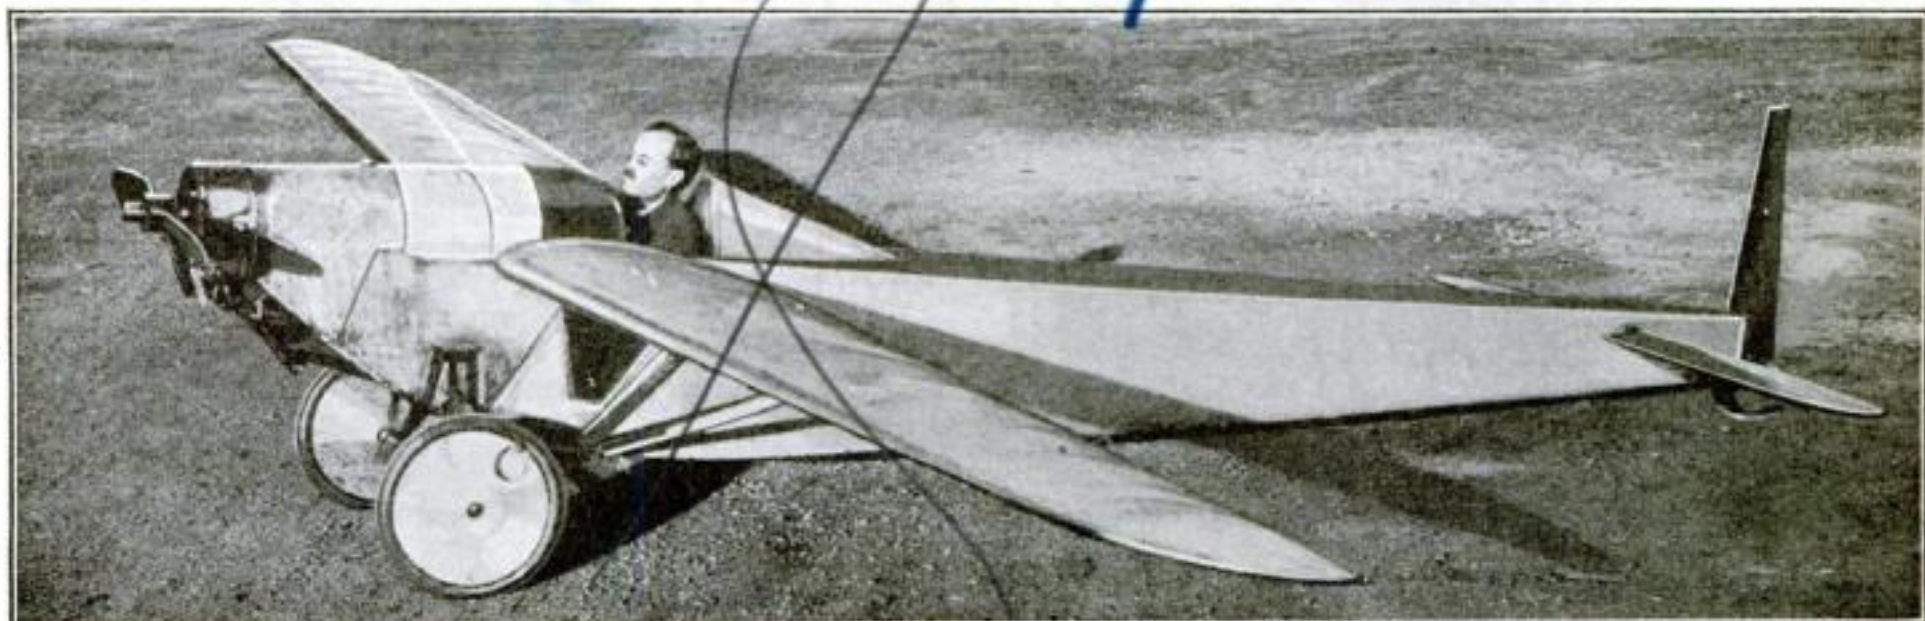

Edward F. Allen, wartime test pilot for the U. S. Army Air Service, in the cockpit of the baby monoplane of his own construction



# A Dozen and One New

## Ingenious Inventions and Automatic Machines



### Seals Letters Automatically

Driven by electricity, this machine stamps and seals letters. The letters are fed in at the left and deposited in the receiving rack.



### Opens Cartons in Three Strokes

Three motions with a new carton cutter open fiber or corrugated pasteboard boxes quickly. A sharp cutting blade projecting from the tool is so shaped that it readily adjusts itself to the edge of the box.



### Pencil Clip Is Knife

A little pocket device that will be found convenient for many office uses serves as a clip to hold the pencil in the pocket, and as a keen two-edged knife for sharpening pencils, cutting string, or erasing ink. It answers the purposes of a pocket-knife besides serving as a pen or lead-pencil clip.



### Ten Stamps in One

Ten different stamps of from one, two, three lines each are available in this metal self-inking device.

### Phone Lock

With a padlock holding down the receiver hook, as shown at right, the business man can prevent his telephone from being used in his absence.



### Pencil Calculator

A calculator that can be slipped on any pencil (at right) is operated by twisting a small handle. Results are shown in figures through a slot in a revolving collar.

### Typewriter-Punch

By means of electrical connections from the numeral keys of a typewriter to a power punch, the machine at the left enables a typist to punch tabulating cards, thus dispensing with an extra operator for the punch.






# Ideas for Busy Offices

Designed to Save Valuable Time and Labor




## Motor-Driven Eraser

In drafting or other work that requires much erasing, an electric power eraser will be found convenient. The complete unit, consisting of motor and eraser, weighs less than two pounds. It is said to be able to remove a period without touching surrounding copy. Correct pressure for erasing is obtained without the possibility of rubbing through.

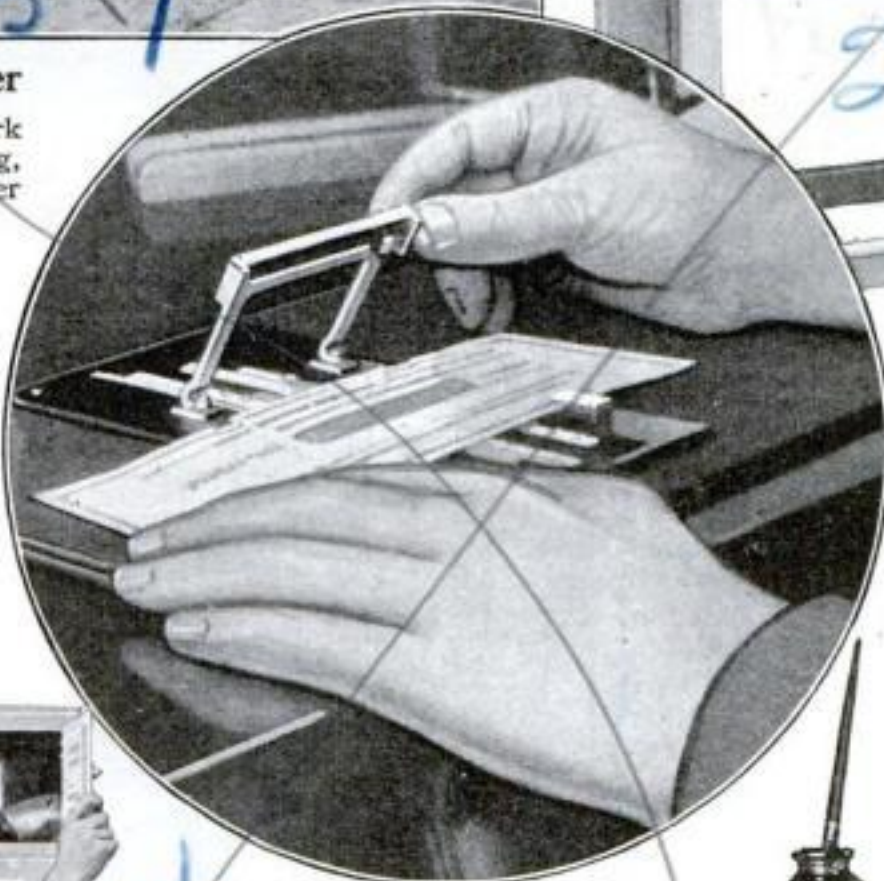

## A Compact Posting Desk

For keeping a large number of record cards in a small space, under fire protection, this posting ledger desk recently was designed. It concentrates from 8000 to 15,000 cards within easy reach of one posting clerk. A movable tray that slides on tracks above the card trays provides a handy surface for writing.

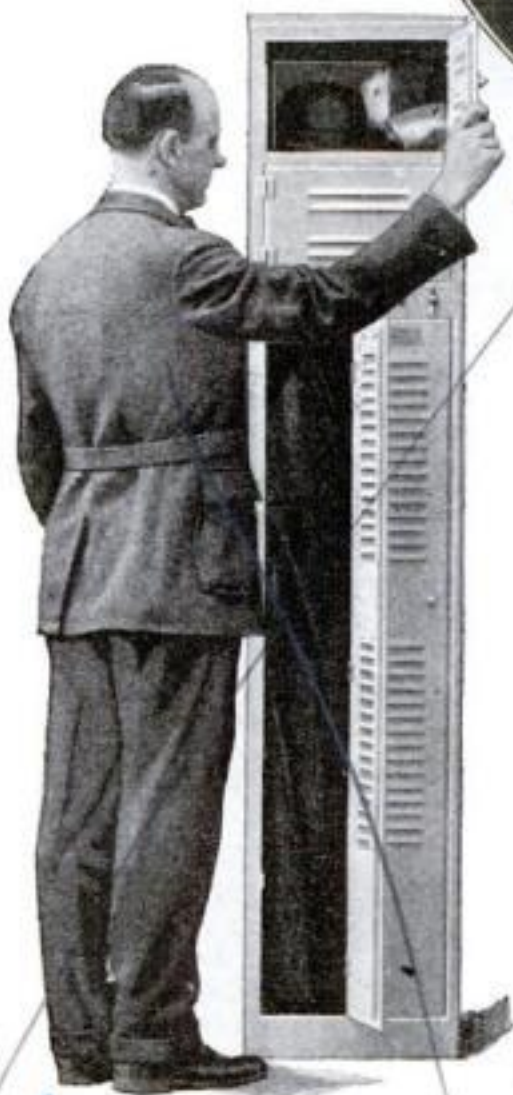

## A Convenient Locker

An economical new type of metal locker is said to provide storage for workers' hats and coats in half the space usually required. A small compartment at the top is for hats and small packages, lunchbox, or a book.

## Pocket Check Protector

A checkbook with its own check protector attached inside the cover contains checks that have specially treated, semi-transparent "windows." These are placed over movable rows of raised numerals that can be arranged in the desired combination. A locking device then is lowered on the check and a roller is pushed across the window, making an indelible impression of the amount.




## Handy Eraser in Pencil Form

An ingenious new eraser is made on the principle of the familiar paper-wound pencil. When the eraser point is worn down, unwinding one of the notched paper spirals of the pencil exposes a new erasing surface.

## For Adding Fractions

The calculating device shown at the right is a fractional adding machine designed for use where fractional numbers are encountered often, as in architectural and engineering work. It adds feet, inches and fractions of inches, always reducing them to their simplest form and with the results instantly visible. The instrument, containing four dials, is operated by the use of a steel stylus.

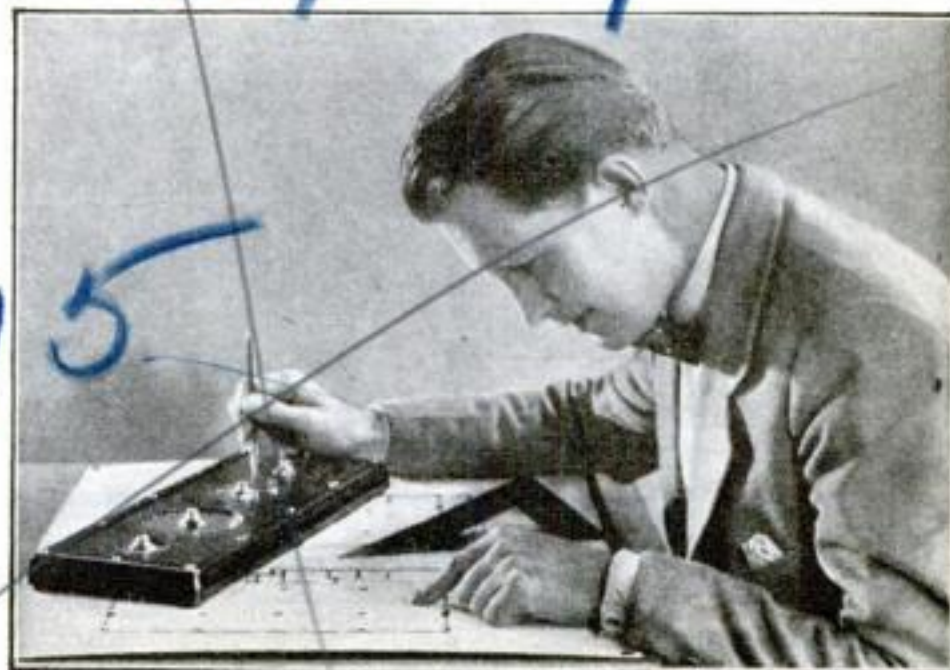



## Automobile Ferries Relieve Traffic Jam on Hudson



© Keystone

UNTIL the vehicular tunnel now under construction under the Hudson River is completed, all automobiles passing between New York and New Jersey have to be carried across the river on ferries.

On some days, especially holidays, the line of cars waiting for transportation on the New Jersey side is more than a mile long.


To lessen the traffic congestion and en-

able automobile commuters to get to work on time, a new type of ferry-boat that carries only automobiles has been put in operation. The photograph shows one of these boats carrying a load of cars.

## Steel Bridge Collapses in Tornado's Path


WE MAY boast that we have conquered nature, but when a natural force actually demonstrates its power, we often have to admit ourselves beaten. Near Withee, Wis., engineers constructed a footbridge across a river. Made of steel to withstand fire, the force of the current, and the wear of traffic, it should have lasted for centuries.

But a tornado came along, and in its path the bridge collapsed as if built of cardboard. Is it any wonder that men

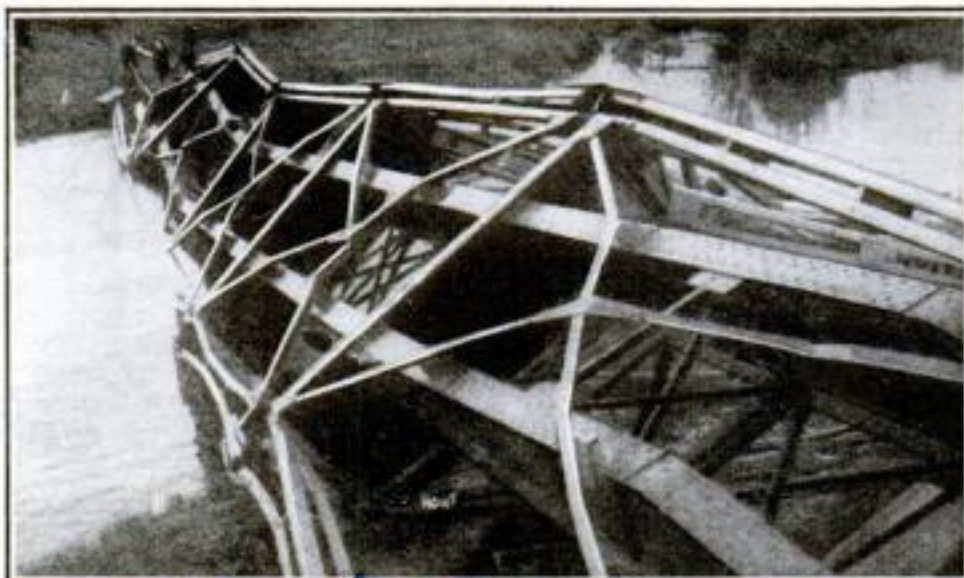

Steel footbridge wrecked by a tornado near Withee, Wis.

today still have the same fear of these terrible windstorms as did the savages of the dark ages?

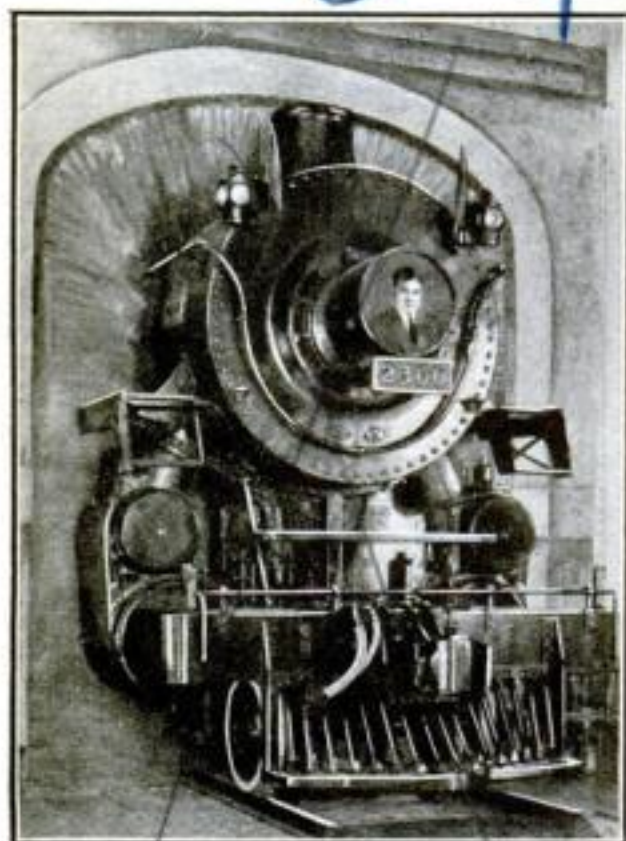

## Wood Model of Locomotive in Banquet Hall

TO PROVIDE appropriate decoration for a banquet of railroad officials in the Chateau Frontenac at Quebec, Canada, recently a full size wooden model of a fast passenger locomotive was constructed and set up in the banquet room.

The model represented the locomotive as emerging from the Connaught Tunnel, one of the greatest engineering undertakings on the North American continent. The model was an exact replica in even the smallest particulars.

## Your Questions Answered

AS A special service to readers, the Information Department of POPULAR SCIENCE MONTHLY will answer all reasonable questions on general science, mechanics, and radio. Write your questions as briefly as possible and inclose a self-addressed stamped envelope.

## Schoolhouse Moved Seven Miles by Water

TAKING a schoolhouse off dry land, floating it through canal locks, and towing it seven miles across Puget Sound to a new location on an island, was the

unusual feat accomplished recently by a Seattle firm of contractors.

The schoolhouse originally was situated on the shores of Lake Washington, adjoining Seattle. With

powerful winches and screwjacks operated simultaneously, the building was raised off the ground and skidded on rollers onto a large barge. Two tugs then towed the school through Lake Washington Canal and the locks shown in the illustration, to Puget Sound.


The school arrived undamaged.



The schoolhouse passing through locks of Lake Washington Canal



# Mammoth New Defense Gun in Public Demonstration

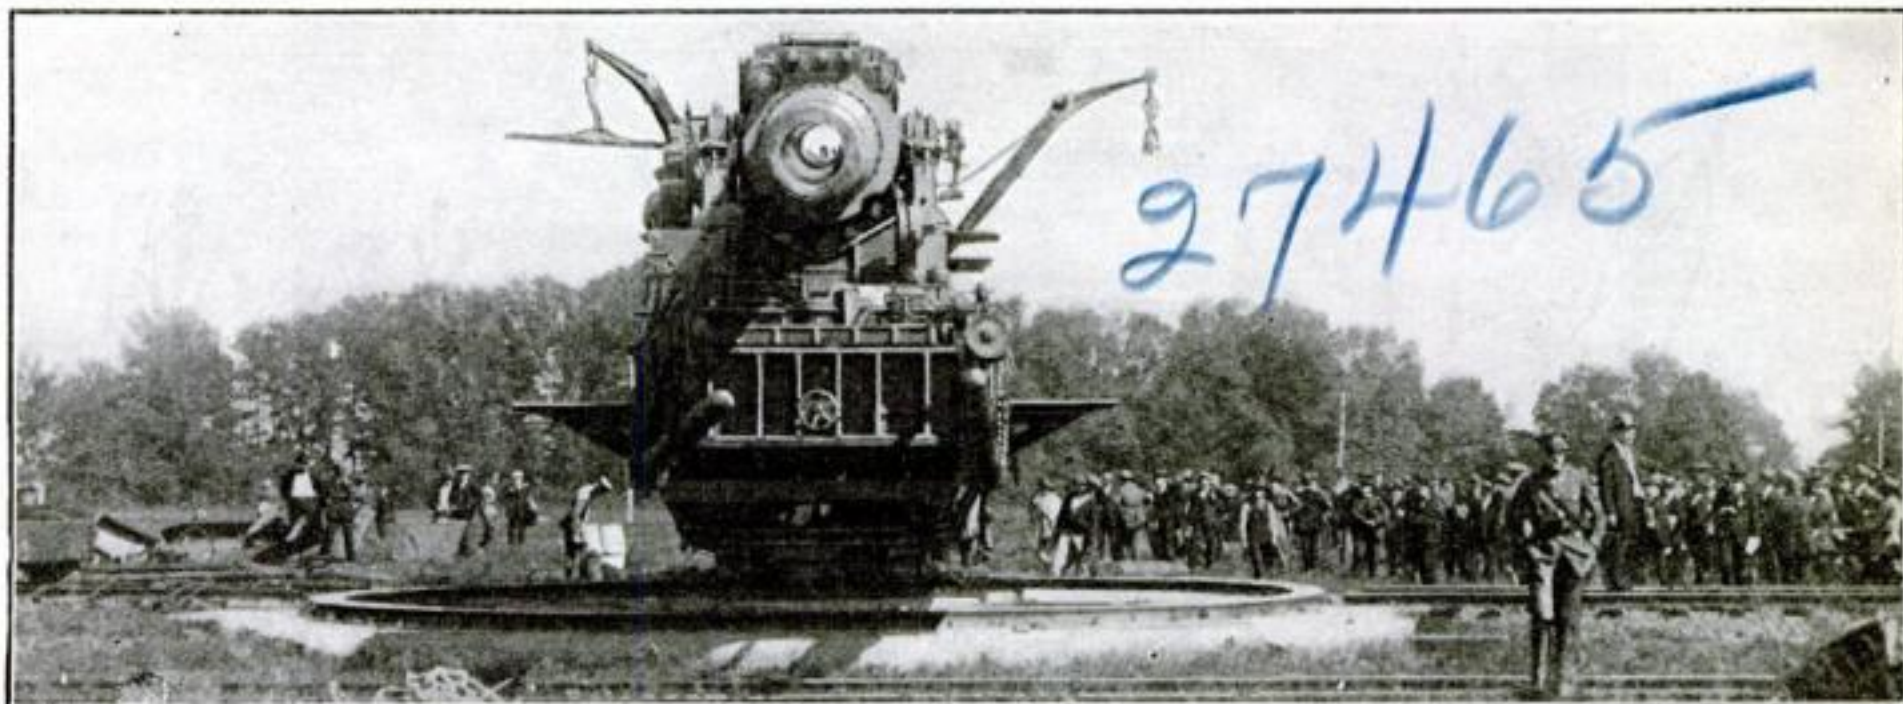

**T**HE size of this mammoth coast defense gun could not fail to impress the crowds that gathered to watch its demonstration a short time ago at the

Army Proving Ground, Aberdeen, Md. The bore of the gun, which is seen plainly in the photograph, is 14 inches, one of the largest in use in America.

Contrasting this great machine with coast defense guns of even a few years ago, one can appreciate the amazing progress made in designing heavy artillery.

## Wisconsin Youth Drives the Smallest Sedan



The midget sedan and its driver posed beside a Ford

**A** SMALL boy in Milwaukee, Wis., drives what is said to be the smallest passenger-carrying sedan ever seen on the streets. There is more difference between his car and the Ford coupé beside it than there is between a Ford and a Rolls-Royce. But it actually runs, gets its tires punctured and its engine out of order just like bigger cars.

## America's Most Active Volcano in Eruption

**T**HIS most recent photograph of Mt. Popocatepetl shows the most active volcanic peak in the North American continent in action. The Aztec name of this strange peak of snow and fire means literally, Smoke Mountain.

Located near Puebla, in Mexico, it is sometimes called by tourists who cannot remember the spelling of the real name, the "Puebla volcano." It is the second highest summit in Mexico, rising to a height of nearly 18,000 feet, about 4000 feet higher than Pike's Peak in Colorado. The last 3000 feet of ascent must be made on foot because of

loose lava and ashes. On the dome, the heat is intense and the reflection of light from the snow is blinding.

At the foot of one of its slopes is a vast lava field.



Remarkable photograph of Mt. Popocatepetl in action



## The Loftiest Point Ever Photographed on Earth

**T**HIS photograph of the summit of invincible Mount Everest was snapped with a small hand camera at an altitude of 28,000 feet, the highest point on earth at which a picture ever has been taken. It was made during the ill-fated attempt last year to scale the summit of the world's highest peak.

Colonel E. F. Norton, leader of the expedition, is seen at the left center. He was only 80 feet away from the camera, but it took him an hour to negotiate this distance because of extreme exhaustion and difficult footing.

The cone-shaped peak appears in the distance. It is only 300 yards away.



# The Wilson Dam at Muscle Shoals



**T**HIS magnificent new photograph of the Wilson Dam at Muscle Shoals shows the full breadth of the immense project by which the world's greatest power dam will create the "Niagara of the South." The dam is nearly a mile long and 102 feet high, and when completed will harness the Tennessee River to sup-

ply turbines capable of generating 600,000 horsepower.

Construction of the Wilson Dam was started during the World War to supply

## Harnessing the Small Streams for Power

**R**APID strides are being made toward successfully utilizing the power that may be derived from small streams. Two of the newest machines designed for this

purpose are shown in these pictures.



The device in the upper illustration may be operated from nothing larger than a spillway. It is a complete power unit in itself, consisting of turbine, generator, and governor housed in one cylindrical metal covering. It is of the high speed propeller type, running up to 700 revolutions a minute. The runner shaft is connected with a direct current, 125-volt generator, permitting its use for standard lights, and general farm use.

The feature of this machine is the self-contained governor that controls the speed by regulating the amount of water entering.

The second machine shown below may be built to suit the conditions of any stream, its designers claim. It consists of a multiple crankshaft, including five or more cranks connected with paddles that operate the cranks when the water strikes against them.

Any number of units may be employed.

For irrigation purposes a pressure pump is added that allows the water to be lifted for distribution over wide areas.

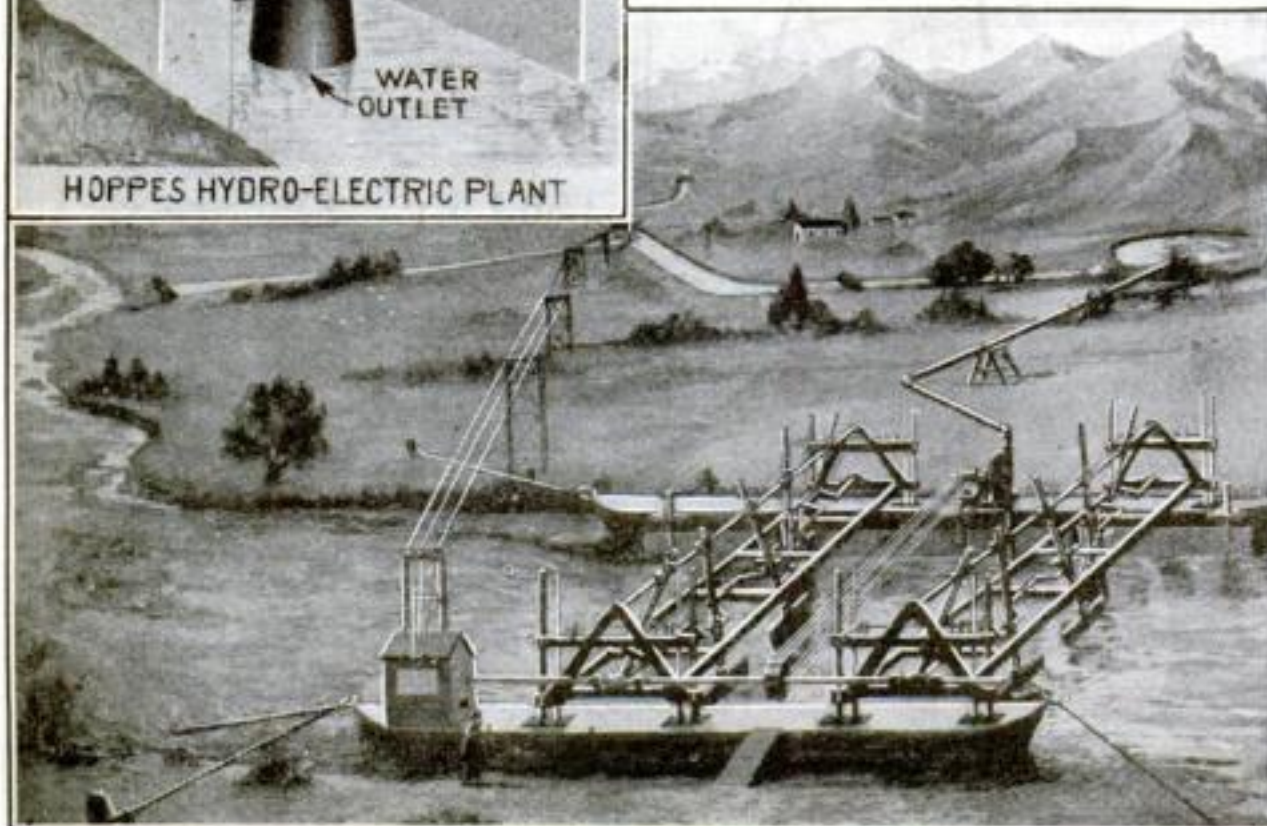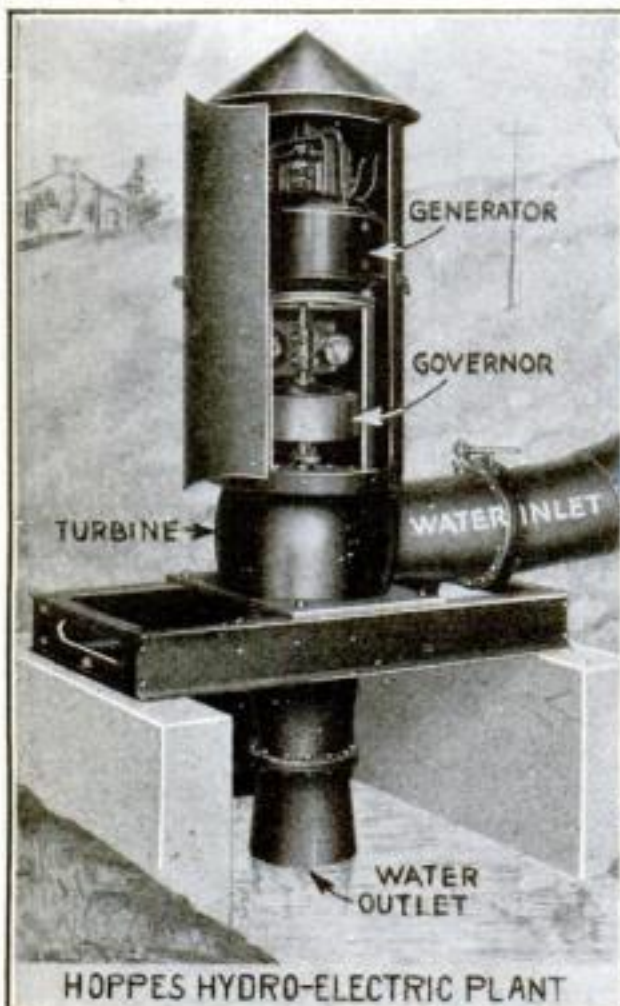

Two types of power units for small streams—A turbine generator (above) and paddle system



## A Perilous Job—Painting the Brooklyn Bridge

**G**IVING Brooklyn Bridge its annual coat of paint is a job full of peril for the men who must cling like spiders to the giant steel web. As long as the great bridge stretches across the East River, connecting the Island of Manhattan with Brooklyn, painters will have to risk their lives once a year to prevent the cables from rusting.

The photograph was taken by a dare-devil photographer from one of the high towers on the bridge. The view of the street cars crossing on the bridge below gives an idea of the dizzy height from which the camera was snapped.

## What Do You Want to Know?

**P**OPULAR SCIENCE MONTHLY will be glad to answer questions from readers on subjects of general science, mechanics and radio. Address your questions to the Information Department, POPULAR SCIENCE MONTHLY, 250 Fourth Avenue, New York City, inclosing a self-addressed stamped envelope.



# —A Future “Niagara of the South”



Courtesy Engineering View Service

power for a great nitrate plant for the manufacture of explosives. When it was one-third completed at a cost of \$17,000,000, work on it ceased. Its comple-

tion will mean that the Southern States will have a water power plant second only to Niagara, and one of the greatest agricultural and industrial areas in the United

States. It also may make possible the peacetime operation of a fertilizer plant that may revolutionize farming in the South and East.

## How Everest Climbers Bridged Treacherous Chasms

AT THE highest altitudes ever reached on earth, members of the recent Mount Everest Expedition crept across crevasses of inconceivable depth on the rungs of a portable ladder. Of the many unusual bridges in the world there is probably none possessing strength as great for its weight as the remarkable ladder bridge carried by those daring explorers.

The bridge was made specially by an English firm for use at an altitude of 24,000 feet and upward. In view of the difficulties of transport at this tremendous height, it was essential that it should be extremely light and easily carried. To meet these requirements it was constructed of hollow wooden spars, put together with hinges in three sections, each of which could be used as a separate

unit. Extended full length the bridge measured 18 feet and weighed only 45 pounds.


Adjustable spreaders of hollow spar were provided at each end of the bridge to give a firm resting surface in the snow or ice, while a light hollow derrick was used to lower the structure safely across a chasm. The walls of the hollow bridge rails were barely one-quarter of an inch thick, while those of the rungs were not more than three-sixteenths of an inch thick.

Stretched at full length, the bridge could support two fully equipped climbers, and when used in an upright position as a ladder, each rung was strong enough to support a concentrated weight of 300 pounds. This great strength was due to

the direction of the grain and the system of layers of wood of which the hollow sticks were made. The same principle is being applied in the construction of hollow spars for racing yachts and for airplanes.

Spruce wood is sawed into planks less than one-quarter inch thick, then bent around steam-heated mandrels to the form of cylinders. The bent planks then are built in the requisite number of layers round a wooden core and the layers glued together with water-tight glue.

When the core is withdrawn, there remains a hollow spar that is far superior in strength and weather-resisting properties to a solid stick. Proportioned correctly, a hollow spar of one-third the weight is as strong as a solid spar of the same size.

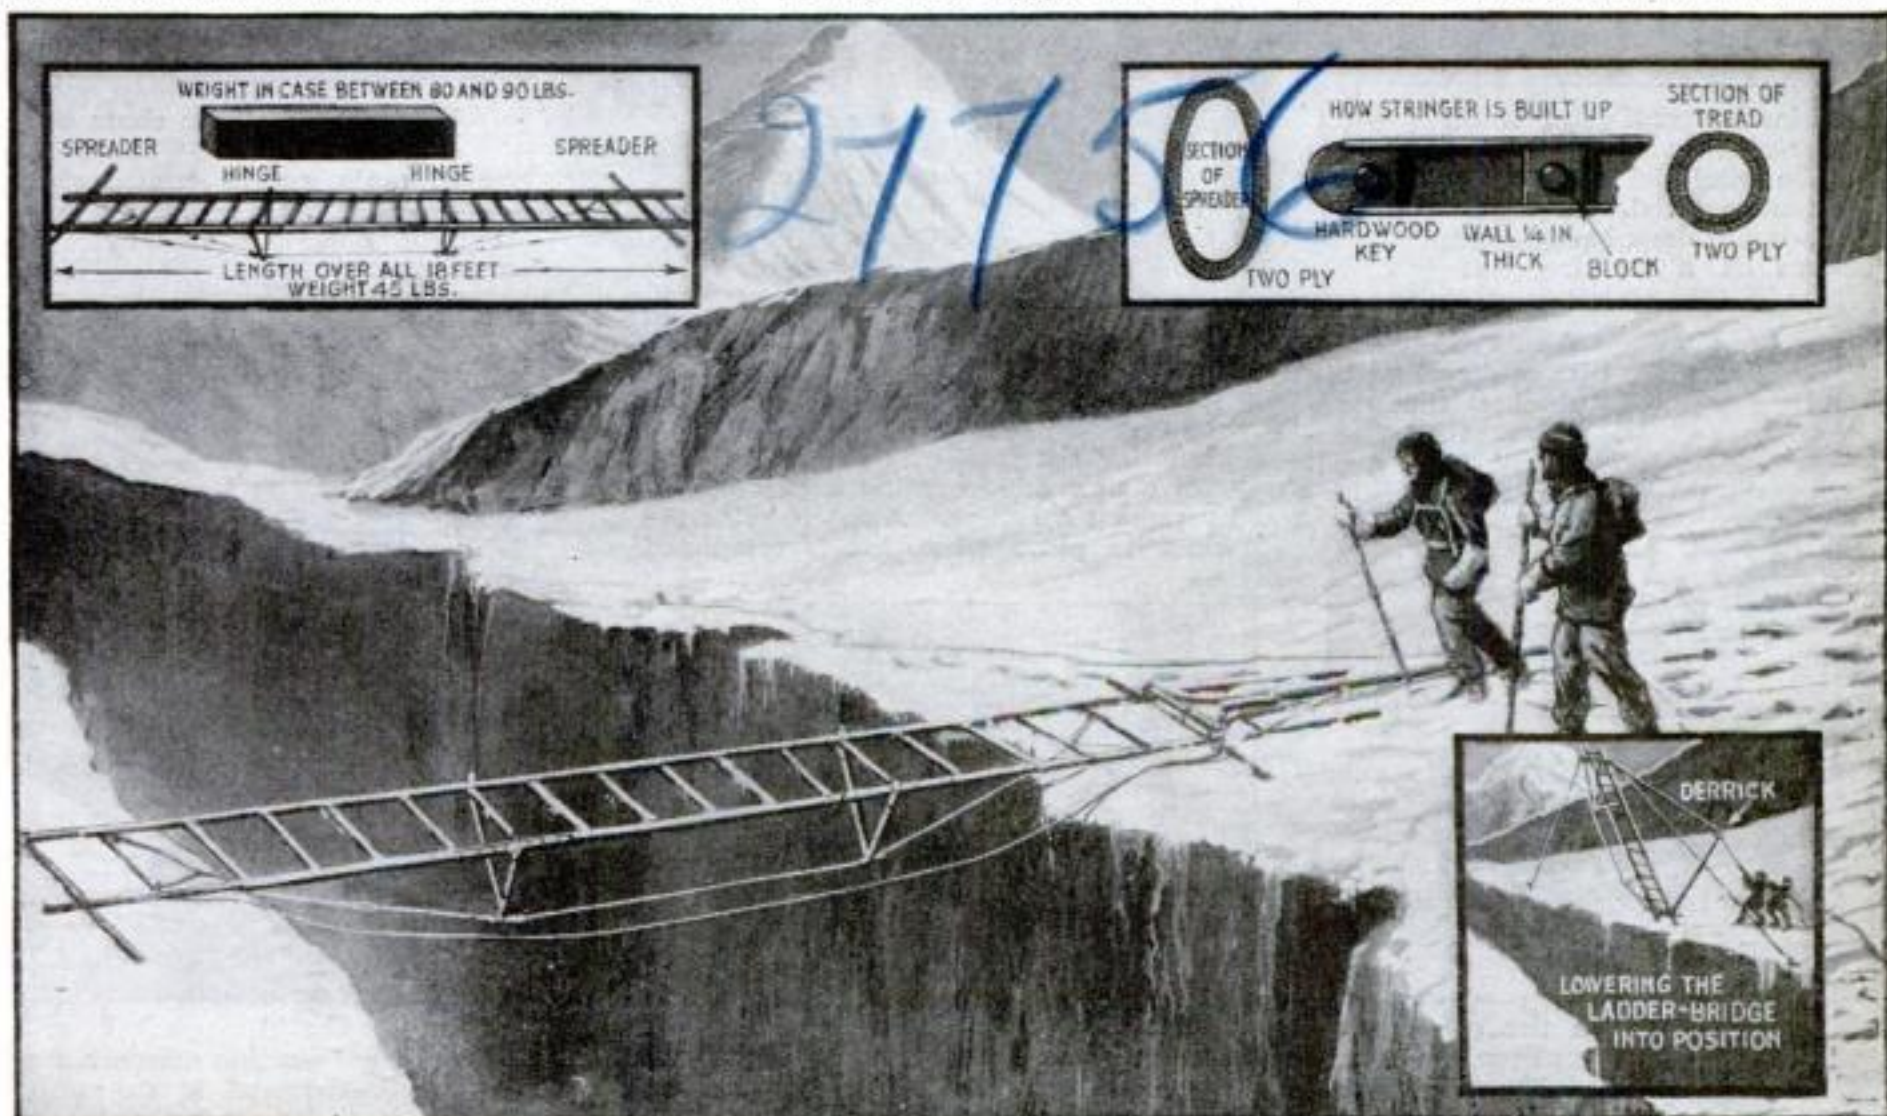

How the remarkably light portable bridge was used to cross treacherous chasms. The insets show construction and operation



# What Inventors Are Adding



Many New and Useful Accessories Are Designed to Save

A new tire gage of the dial type, resembling a watch, has a curved neck that permits easy access to the valve stem on all types of wheels. The crystal of this new pressure gage is non-breakable.



Smoking in comfort while driving is possible with this extension tube device. The cigarette holder has a suction cap that fastens it to the outside of the windshield.

This automatic carburetor control, operating on the thermostatic principle, turns down the needle valve as the engine warms up, thus effecting a saving in gasoline. The device is attached easily.

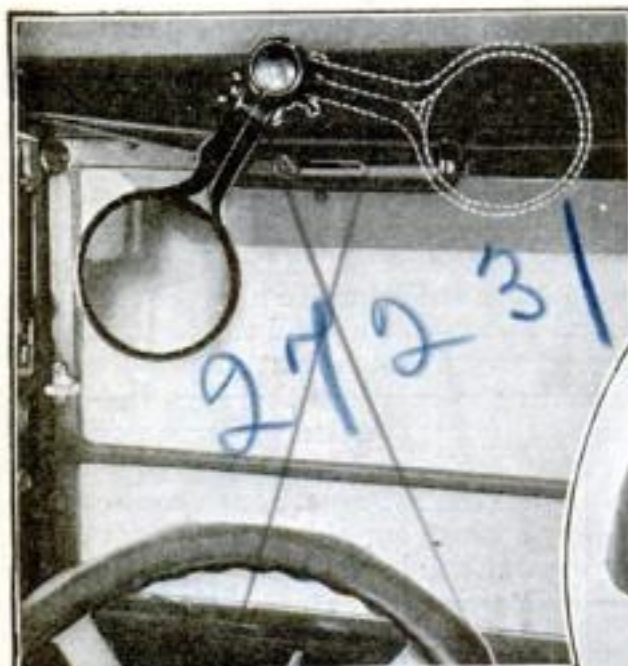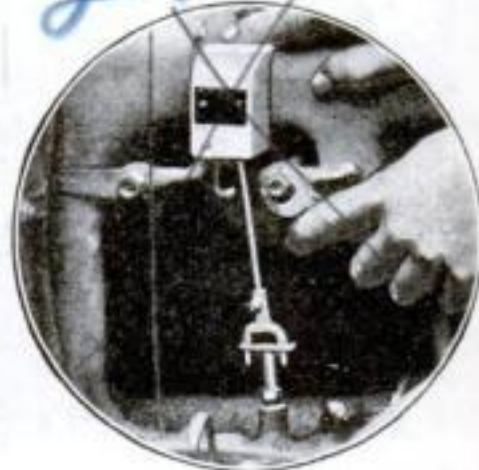

A combination anti-glare shield and rear-view mirror, attached above the windshield is of semi-transparent material. Swung upward against a dark background, it serves as a looking-glass.



Mounting the spare tire is accomplished with a new self-mounting carrier simply by pulling a handle. A catch holds the wheel in place when lift is completed.



When the motorist shuts off his engine, the steering-wheel is locked instantly by this new automatic device attached below the steering post. A key is required to unlock it.



A new safety crank is equipped with a ratchet that prevents the "kick-back" that sometimes causes injury.

This electric windshield wiper is driven by a small motor that is attached above the windshield.



A balloon tire gage of the projecting piston type is designed with the nipple at the side, allowing greater clearance while testing air pressure.




To detect auto-engine noises, a newly invented stethoscope is so sensitive that any irregularities in the ticking of a watch can be heard very plainly.




# to the Motorists' Enjoyment

## Labor and Make Your Car More Efficient and Convenient

Adjustable calipers have been devised to determine whether balloon tires are properly inflated. The calipers are set to the width to which a tire of a given size should bulge under a given normal load.

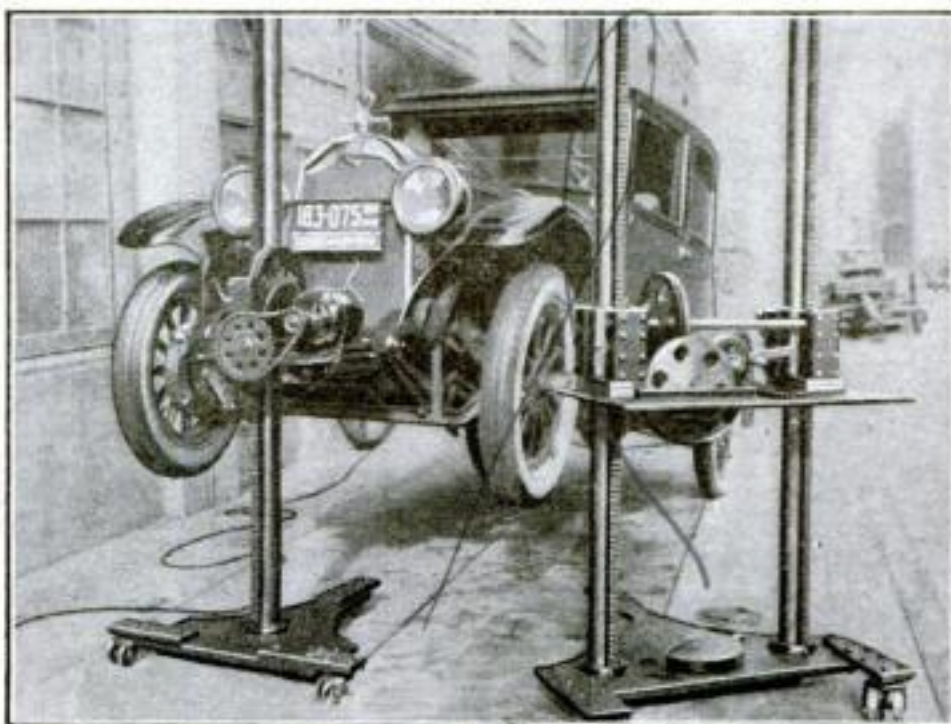

A small red light strapped to the back of the driver's signaling hand is a new aid in preventing night driving accidents. It is held by rubber cords around wrist and middle finger as shown.

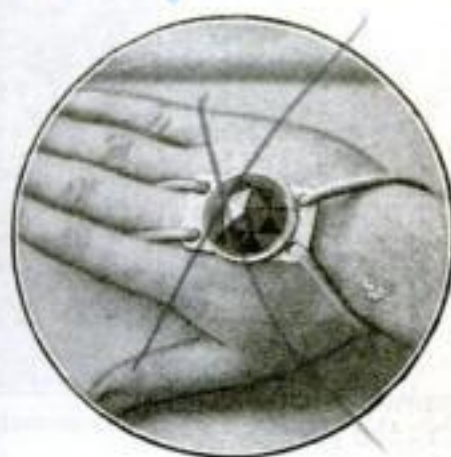


A portable electric hoist for autos. Through a system of gears operated by a half-horsepower motor, a platform to which the car is hooked is moved on double or single vertical steel posts.




Here is an unusual new type of automobile wheel containing a huge inner tube that extends beyond the rim so that half of it is inclosed between the two metal disks that form the wheel. The illustration above shows how the tire is inflated from the center of the disk.



This special jack for cars equipped with balloon tires has the exceptional lift of 17 inches. A 36-inch folding handle makes it easy to operate. It is the two-screw type.

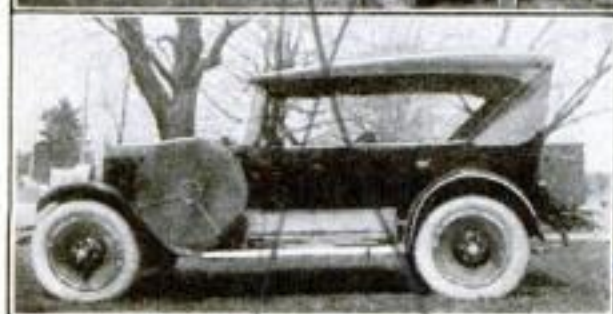

An ingenious folding lunch outfit for the tourist or camper combines a food container, table, and two benches that will seat four persons, as shown above. The entire outfit, when folded, rides easily on the runningboard, as shown in the photograph at the left.

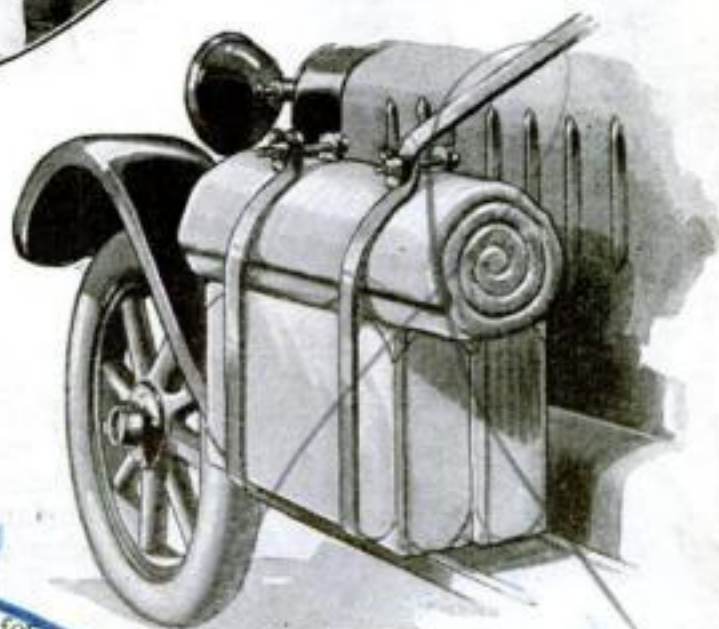

Tent, camp bed, cooking outfit, suitcases and blankets for two can be carried in this compact kit on the runningboard of a car. The roll and suitcases are fastened firmly by strips of metal bolted to the runningboard and clamped together above the blanket roll.

23972




## How Frozen Eggs Are Canned for the Market

**M**ORE than fifty million pounds of canned frozen eggs are used annually in the United States by restaurants, hotels, and in home cooking. They cost from three to five cents a pound less than unshelled eggs and are more easily handled.

The first process in egg canning is chilling the eggs in a room at a temperature of 31° F. for from 12 to 24 hours. This stiffens the whites and makes it easier to separate the whites from the yolks.

Girls then candle the eggs to detect and remove bad or moldy ones. Each girl candles, on an average, 900 dozen a day. Egg canning is done from the middle of March until the middle of September.

From the candler the eggs pass to the breakers, who open and separate them if desired. Canned eggs are sold in the form of whites only, yolks only, or mixed whites and yolks. If no musty eggs are discovered, they then are packed in wax

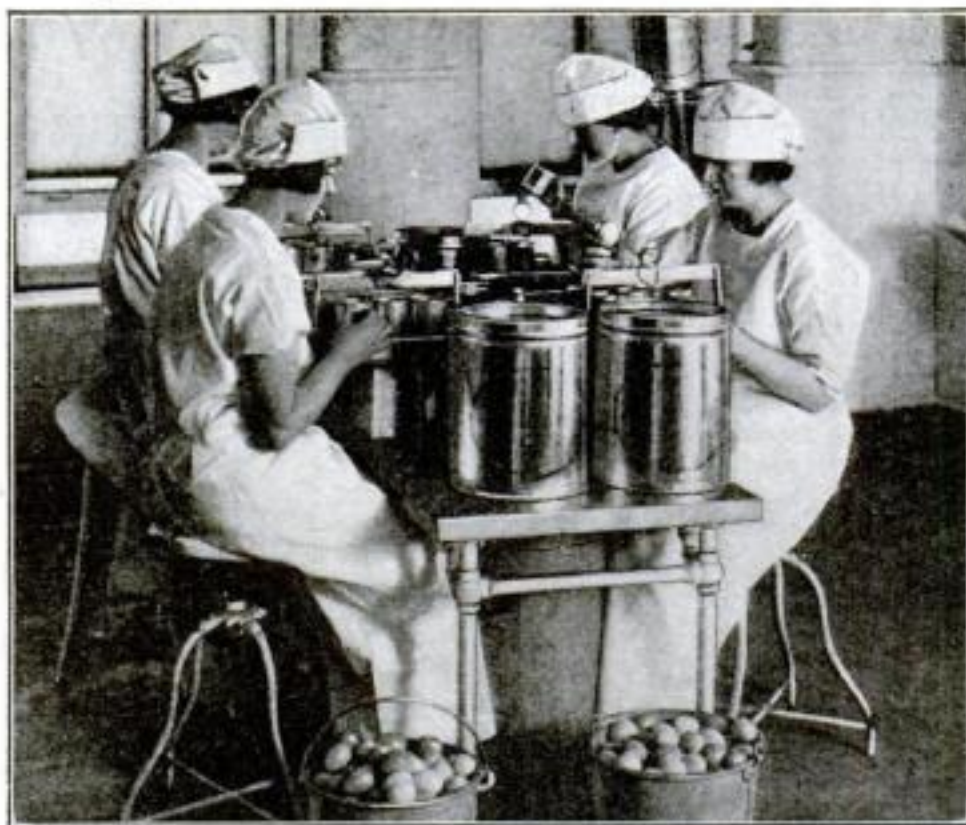

Separating the yolks from the whites preparatory to freezing

lined cans and sent to the freezing room, where they remain for 72 hours at from zero to four degrees below zero temperature.

The entire process, from the breaking of the egg until it reaches the freezing room, takes only eight minutes.

The last step is wrapping the frozen eggs in heavy paper and placing them in refrigerator cars, in which they start on their journey to all parts of the world.

## Study of Fossils Reveals Oil Deposits

**R**EMAINS of tiny shellfish and other fossils believed to be from five million to twenty million years old, are being used to assist in locating fields of buried minerals and oils.

Experts studying areas of ground, looking for traces of oil, collect these tiny fossils, some of which are so small that they must be picked up with camel's-hair

brushes, and send them to the laboratories of the U. S. Geological Survey in Washington for classification. The fossils are reproduced in photographs enlarged from 25 to 150 times, so that their characteristics may be recognized easily.

Fossils millions of years old often are marked very faintly. A blowpipe is used to spray white liquid over these shells to make the almost invisible markings stand out under the microscope.



Spraying fossil shell for the microscope

## Astronomy now Taught by Mechanical Model

**W**HY can we see only one side of the moon? What causes eclipses of the moon and sun? When will there be another eclipse of the sun? What causes the seasons?

Questions like these can be answered readily and with extraordinary clearness by means of a fascinating model of the sun, moon and earth completed recently in England for use in schools and colleges. The relative sizes of the three bodies, and their motions, showing their positions in respect to each other on every day of the year are accurately repre-

## Ship's Blocks Are Tested in Forest Laboratory


**T**HE Forest Products Laboratory at Madison, Wis., has begun a series of tests to determine the strength of keel blocks used to support the hulls of ships while in drydock. When these keel blocks fail, the hull drops with the shattered timbers and is damaged, usually very seriously, so that the importance of the keel blocks is easily seen.

These blocks are 14-by-14-inch timbers of clear white oak. The tests of five sample keel blocks were made under a giant column-testing machine with the load transmitted to the top of the blocks by a roller bearing, so as to allow the timbers to keel over sideways as they would in falling beneath a ship.

Before testing, these timbers were submerged in water for a week so that they would be tested under conditions similar to those they would encounter in actual service in the drydock. The illustration below shows a number of the blocks under tremendous downward pressure in the laboratory column-testing machine.



Keel blocks under tests in laboratory

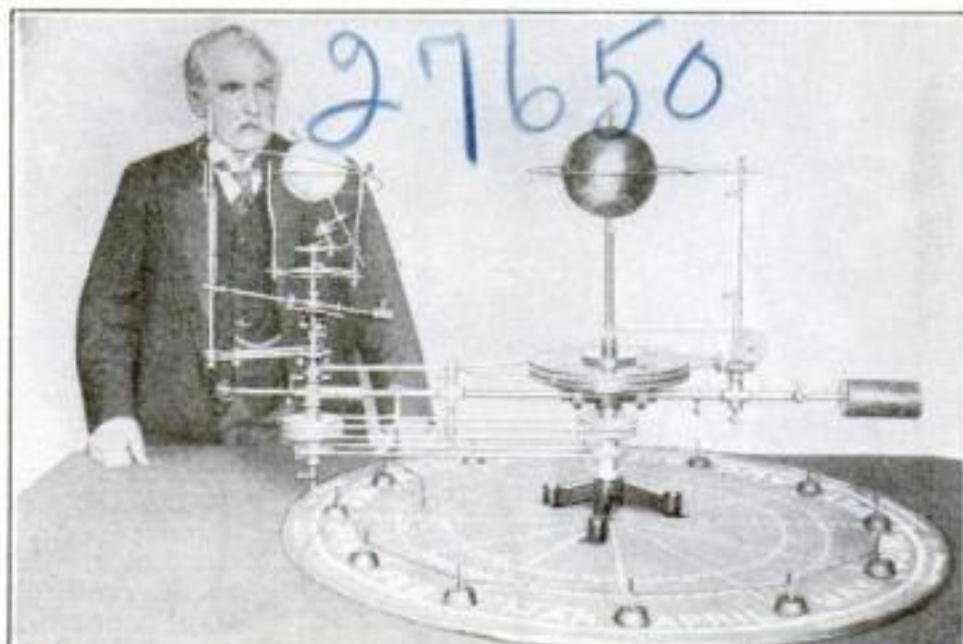

This model shows the relative courses of sun, moon, and earth



## Watchmakers Must Pass Rigid Examinations

**T**O MAKE sure that all jewelers displaying watchmaker's signs in their shops are really experts in their trade, the U. S. Horological Institute conducts examinations of all applicants before issuing licenses by carefully examining samples sent in as a preliminary test of skill on the part of the applicant.


To keep the public from being imposed upon by incompetent men, the examination consists of two parts. The first part is a written examination in which the applicants are expected to show their theoretical knowledge of watches. For the second part a damaged watch is sent to the applicant. This he must repair to the best of his ability. These test watches previously have been put out of order by the institute so that the repair work may easily be graded.

The photograph shows R. E. Gould of the Horological Institute, checking up on repair tests by an electrical timing device.



Testing the accuracy of repaired watches

## Blended Motor Fuels Are Put to the Test

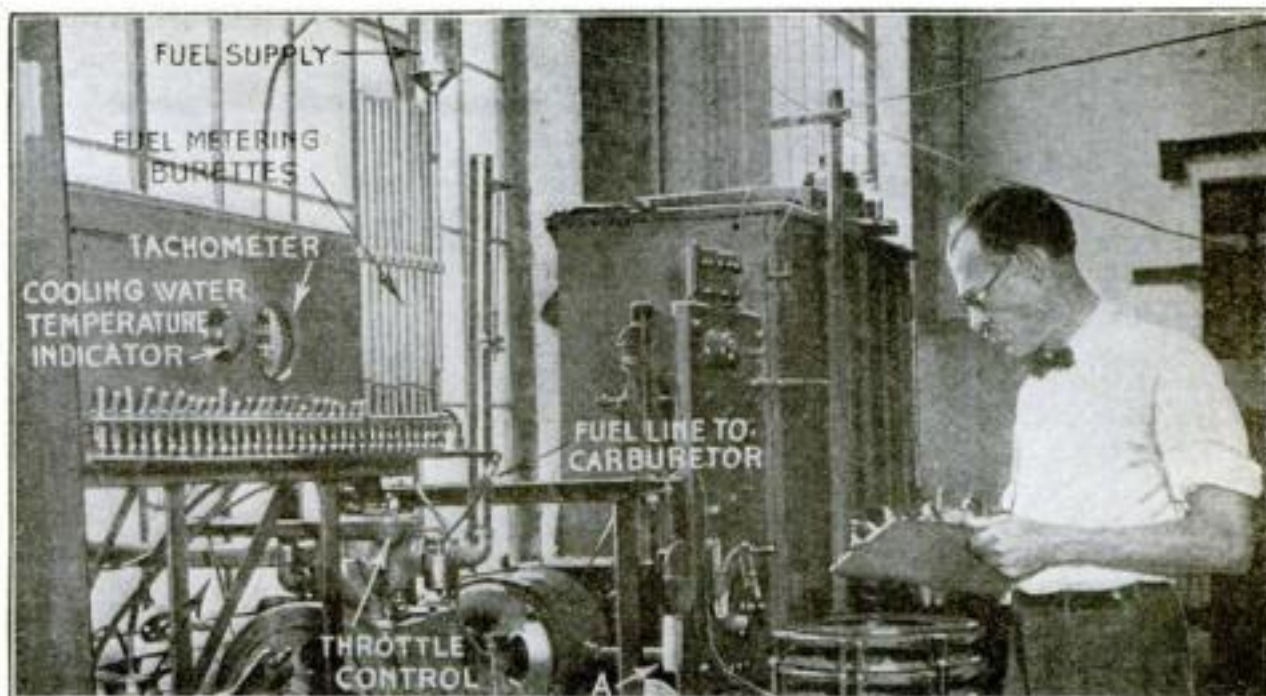

M. A. Thorne of the Bureau of Standards, testing blended gasoline with the new apparatus

**S**O MANY blended fuels are on the market now that the average motorist is puzzled as to which to choose. Nearly every time he drives up to a new filling station, a new mixture is recommended to him and he has no way of telling which ones are good and which ones poor. Among the advantages claimed for most of these special fuels are increased mileage, more power, prevention of carbon formation, and elimination of knocking.

Coming to the motorist's assistance, the U. S. Bureau of Standards recently has developed a method of testing these special fuels to determine whether they are better than ordinary commercial gasoline in regard to economy, power,

and prevention of irritating knocking.

In the photograph M. A. Thorne of the Bureau of Standards is seen with the new testing apparatus. He has a small, high compression gasoline engine attached to an electric dynamometer, which is used first as a motor to crank the engine. After the engine is started, the dynamometer is used as a generator and the engine speed is controlled by varying the electrical load.

The power developed by the engine is computed from readings of a spring balance applied at the end of a torque arm. Fuel economy is determined by a fuel-metering device consisting of a series of burettes, or tubes graduated to scale.

## Electrical Machine Records Heart Energy

**B**ASED on the theory that the human heart generates small electric currents, a new machine for recording heart action was tested recently at the Ellis Hospital in Schenectady, N. Y. The instrument measures the difference in voltage between various parts of the body, and is actuated by energy that

comes from the patient in the form of tiny electric impulses. This energy is so small that for detection it must be amplified much as a radio wave is amplified.



The instrument that measures heart action


## Seeks New Cures by Means of Radio Waves

**I**N HIS laboratory at Alpine, N. J., Dr. J. Clawson Burnett has been per-

fecting the oscilloclast, an instrument designed to heal human diseases by means of electromagnetic waves.

After experimenting for two years with the machine, the invention of the late Dr. Albert Abrams of California, which raised a storm of criticism, Doctor Burnett says he is now ready to place his results before scientific societies for examination.


Just as radio-phones respond to electromagnetic waves, so may the human body be affected, according to Doctor Burnett.

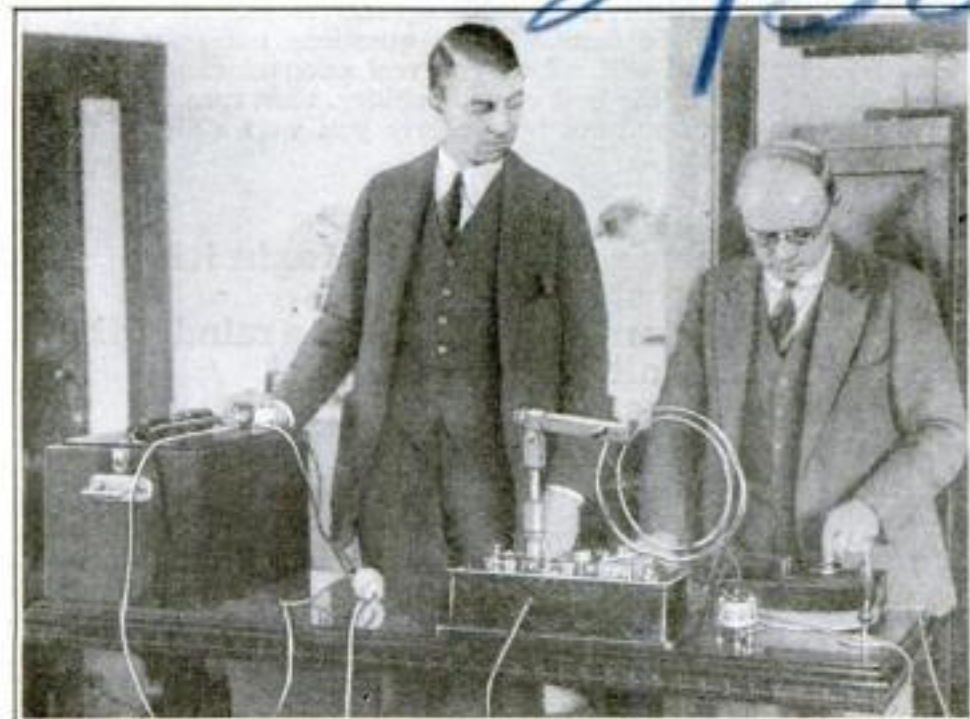

Dr. J. Clawson Burnett (right) at work in his laboratory



# Artificial Heat Now Dries Hay Crops

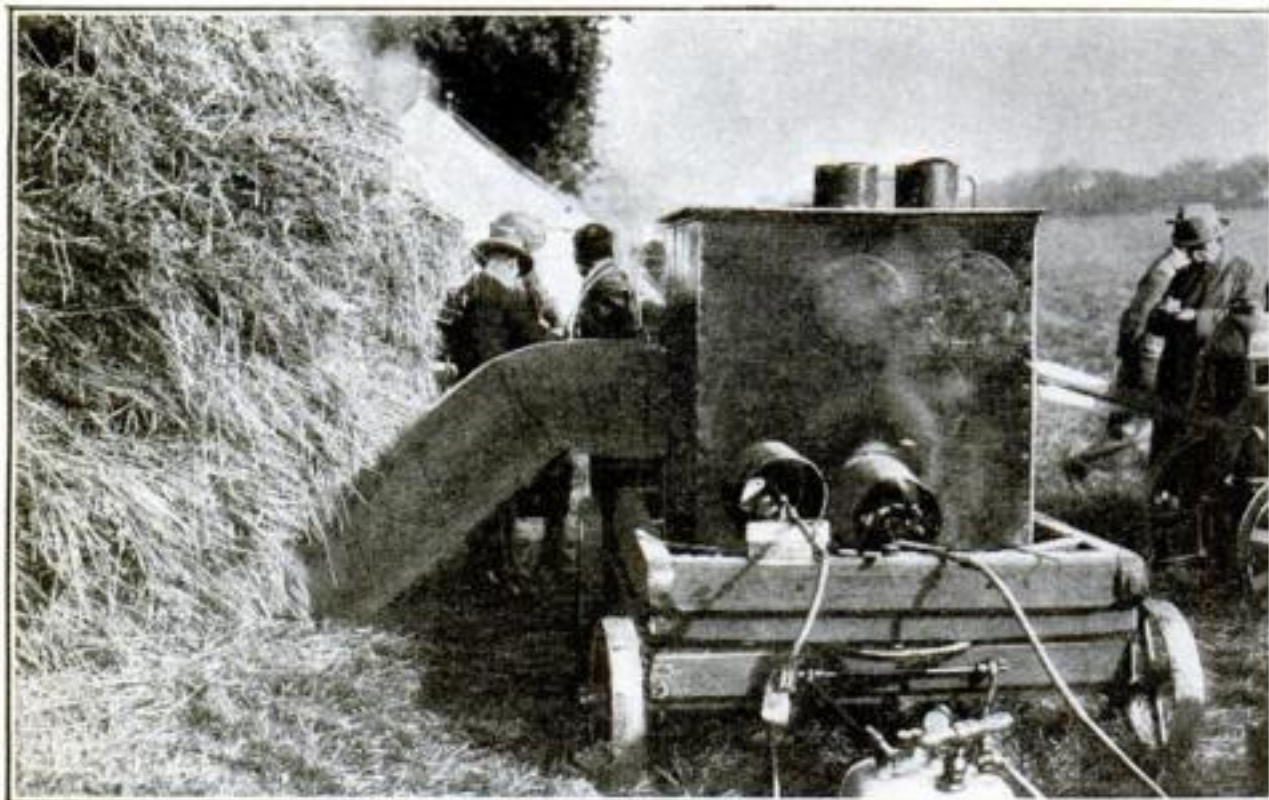

**"MAKE** hay while the sun shines," urges the old proverb. But what shall the unlucky farmer do if the capricious sun refuses to lend its assistance during the haying season? Thousands of acres of crops are lost every year on account of rainy weather at the critical period.

In England, where damp and foggy weather, common during certain seasons,

makes a good hay crop rare, a new device recently has been patented by Captain B. J. Owen, which dries hay by means of artificial heat. The hay is stacked while it is green and then it is dried in 25-ton stacks.


The photograph shows the system of pumping and drying. Heat is conducted through a large pipe to the interior of the stack.



## A Portable Power Hammer for Light Work

**F**OR lighter grades of work, such as sewer jobs and small trenches where light timber or steel sheeting is employed, the big automatic hammer is practically useless. For these jobs a new hammer much reduced in size is convenient and economical.

It can be used in close quarters, needing only half an inch clearance. It embodies all of the features of the large hammers and is carried about easily. The photograph shows the hammer in use for driving light sheeting for a trench.

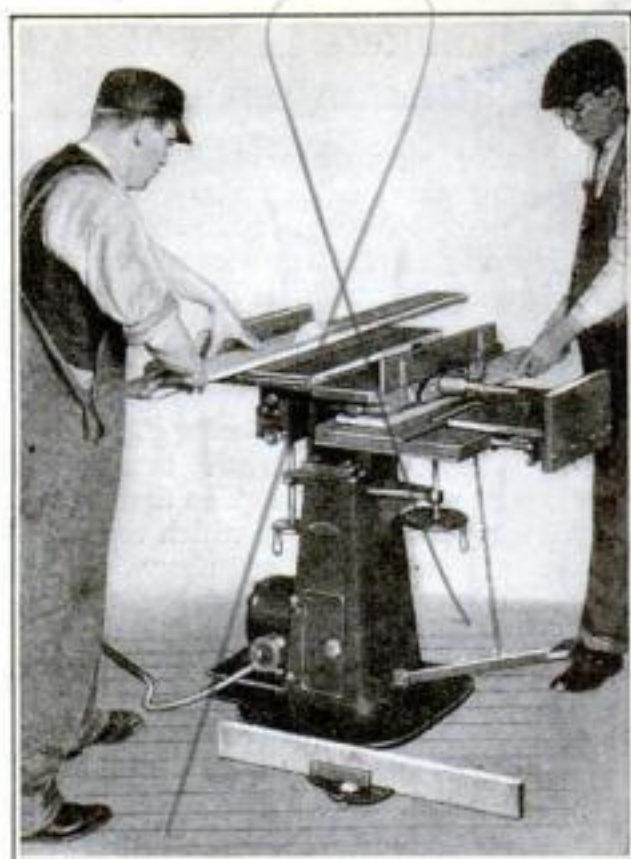

## Mechanical Cabinetmaker Combines Five Machines

**F**IVE complete woodworking machines with all adjustments are combined in this unusually compact mechanical cabinetmaker. It includes a sawtable, jointer, thickness planer, boring table, and speed spindle.

In the photograph above three operations are shown—ripping, thickness planing, and hollow-chisel mortising.

Almost every woodworking operation—20 entirely different and practical ones—are said to be performed on this machine, which can be used on both long, heavy work and small, accurate work. Four men can work on the machine at the same time. The stability of the machine for group work makes it especially valuable in manual-training classes.

The machine is of strong construction. It is equipped with a one-horsepower motor, and takes only 28 by 41 inches of floor space.

## To Produce More Helium

**T**HE U. S. Navy Department soon will begin developing additional supplies of helium gas for airships, it is announced. At the present rate of helium production in the United States, it would require four months to obtain enough of the gas to fill the bag of the dirigible *Los Angeles*, formerly the *ZR-3*. In developing helium and constructing a plant for its extraction, Uncle Sam already has spent more than \$5,000,000.

## How Much Science Do You Know?

**T**HE man who has stored in the back of his head a working knowledge of the fundamental facts of science possesses an important asset in these days of scientific achievement, whatever his work may be. For that reason **POPULAR SCIENCE MONTHLY** publishes each month a list of a dozen questions about scientific facts. These questions not only will help test your knowledge, but will afford you real entertainment.

Answer the 12 questions below to the best of your ability, then turn to page 157 for the correct answers, and see how nearly you were right. See if you can score 100 per cent.

1. Why do some people get bald?
2. Does the boiling of water remove impurities in it?
3. What is the lightest substance known?
4. Why does a snowflake fall more slowly than a raindrop?
5. Why do we believe that all stars are moving?
6. Which travels faster, electricity or light?
7. Do insects have brains like ours?
8. Why does radio go through walls?
9. Are there special brain foods?
10. Why can parrots talk?
11. If the air weighs 15 pounds to the square inch, why does it not press us flat?
12. What makes the spouting geysers in Yellowstone Park?



# Mechanical Merry-Go-Round and See-Saw for Children



**A**ROUND they go on their merry-go-round, and up and down on their see-saws, for the ingenious new mechanical plaything seen in the photograph is a combination of the two amusements. As it teeters, it revolves—this “merry-go-bob,” which seems sure to find favor with

children who like to make things go by their own efforts.

The play machine is substantially made of iron and will not tip over. The children make it go by pushing on pedals and pulling handles.

The plaything can be used in the nursery

as well as on the lawn. Four children need to cooperate to run the merry-go-bob, but it is safe to say that its operation need not cease on account of lack of passengers, at least if the plaything is standing in plain sight of the children somewhere out of doors.

## Flaws in Big Guns Are Revealed by X-Ray

**T**HE use of a newly devised X-ray testing apparatus soon may make it possible to detect flaws in large guns and other ordnance, which, if not found, might cause disastrous explosions such as have occurred in the past. This was the recent statement of Col. T. C. Dickson, of the Ordnance Department of the U. S. Army, speaking before the American Society of Mechanical Engineers.

A 280,000-volt X-ray equipment has been put into operation in the laboratories of the Watertown, Mass., Arsenal. With this apparatus clear films of steel up to three inches in thickness can be obtained,

according to Colonel Dickson, but so far there has been little success with steel more than three inches thick.

“The experience with the equipment,” he said, “has demonstrated that it has great practical value in showing methods by which sound steel castings can be produced, and as an instrument of inspection.”

“The removal of all defects, or their location where they do harm, makes possible a material saving in the weight of castings. The cost of making X-ray films of castings is far less than the cost of cutting up castings to ascertain their soundness.”



## New Type of Windmill Runs without a Vane

**T**WO South Africans, Messrs. Oohlson and Henning, are the inventors of this new type of vaneless windmill designed so that its sails will operate and drive the pump rod without shifting their direction according to the direction of the wind. Two semicircular sails are arranged at right angles to each other in such a way that a surface always is presented to the wind.

The inventors are shown with their creation, the cost of which is said to have been less than \$50.

The height of the windmill is 20 feet. It is geared in a ratio of five to one and is so powerful that two men of average weight can hang on the driving rod without impeding the work of the mill. The home of the inventors is Port Elizabeth.

## Know Your Car

Starting troubles, which come regularly with zero temperatures, can be lessened by a few simple precautions. In winter the main resistance to cranking is the stiffened, chilled oil film on the cylinder walls. If you keep your car in a cold garage, add warm water to the engine jackets. This will heat the oil film on the cylinder walls and give a cranking speed sufficiently high for starting.

At zero the capacity of the battery is only about half of that at summer temperatures, and the voltage drops very low with large current drains. During the winter much greater demands are made on the battery. Starting requires a much larger current, the lights are burned longer, and few long trips are made that might keep the battery charged. Test your battery frequently during the winter, there-

fore, and if it is much below the charged condition, have it charged from an outside source.

Gasoline cannot be ignited until it is in a vaporized state, and at low temperatures it vaporizes slowly. Hasten this ignition by turning the engine over a few times, with the carburetor choke closed, then allow the engine to stand for two or three minutes before using the starter again. This wait allows the gasoline to continue vaporizing in the cylinder until an explosive mixture is obtained. Hot water poured over the carburetor and intake manifold helps also to vaporize the gasoline more quickly. It is well to carry a thermos bottle of boiling water in the car for this purpose.

After the engine is started, conserve its heat by using a radiator shutter, and, in very cold weather a hood cover.



# New Inventions to Lighten

Here Are 16 Useful Mechanical Utensils and



This light electric iron for shaping hats can be used with a handle, or clamped in a stationary base



Sprung into the mouth of the milk pitcher and turned to engage a notch, this strainer lid protects the contents from dirt and flies



A mechanism that tilts and rolls the tub, sending the suds whirling swiftly around in three complete figure-eight movements, producing unusual friction between the clothes and water, is a feature of the new electric washer shown above




A handle that will not get hot and terminals that will not burn out are advantages claimed for this electric iron. Ventilation at the back and around the handle attachment prevents excessive heat



A collapsible oven, small enough when folded to fit in a suitcase, is useful for the camper, or convenient in the smallest kitchenette



This new cake-pan has two removable bottoms, a flat one for layer cakes, and one with a tubular center for angel food

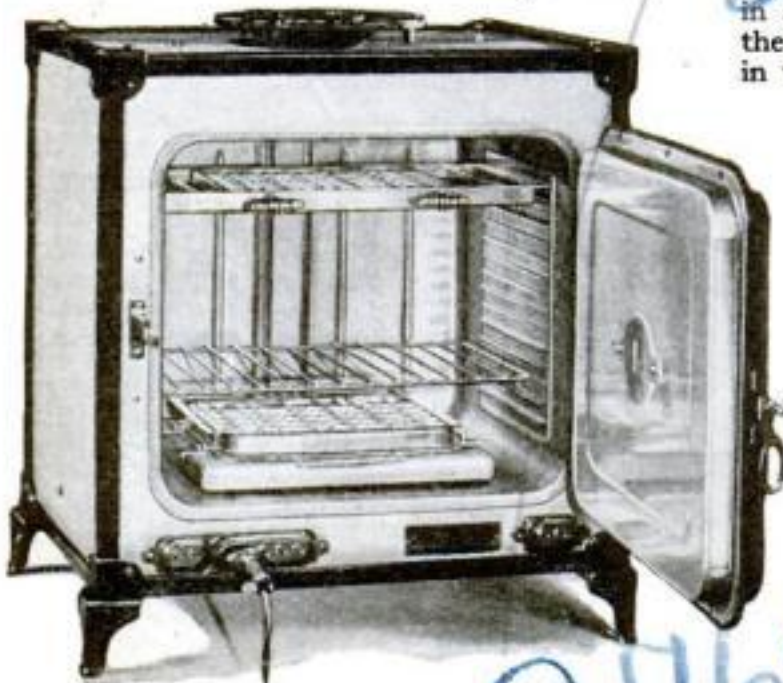

Although small enough to be placed on a shelf, the compact electric range shown at the left has ample capacity to do every sort of cooking for a family of five. At the top is a "quick boil" heater. The oven may be used also as a fireless cooker



When not in use, the electric sewing machine pictured below is concealed in an ornamental table. If a door is opened at the front, the table becomes a convenient writing-desk, with compartments for paper and pens



# the Drudgery of Housework

## Electrical Appliances to Save Time and Labor




Washing and wiping windows may be accomplished in a single operation by using the newly patented window-cleaning brush shown above. A narrow strip of hard rubber for wiping is attached to the same handle as the brush, following it across the surface of the window




A four-bladed chopper with knives radiating from the center facilitates chopping meat or vegetables

Lifting the handles at the sides of a new pressure kettle releases the top from the bottom automatically. The bottom can be used also as a small oven

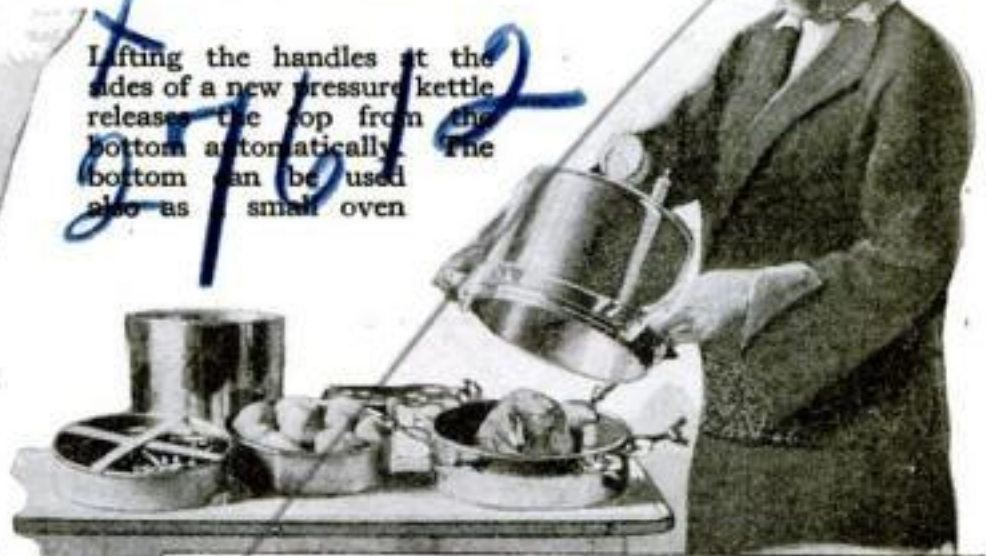

The grinding wheels of this all-purpose household tool can be used to sharpen knives, scissors, the lawn-mower, or any other edged tools. Other ingenious parts of the device make it useful as a can- and bottle-opener, or glass-cutter

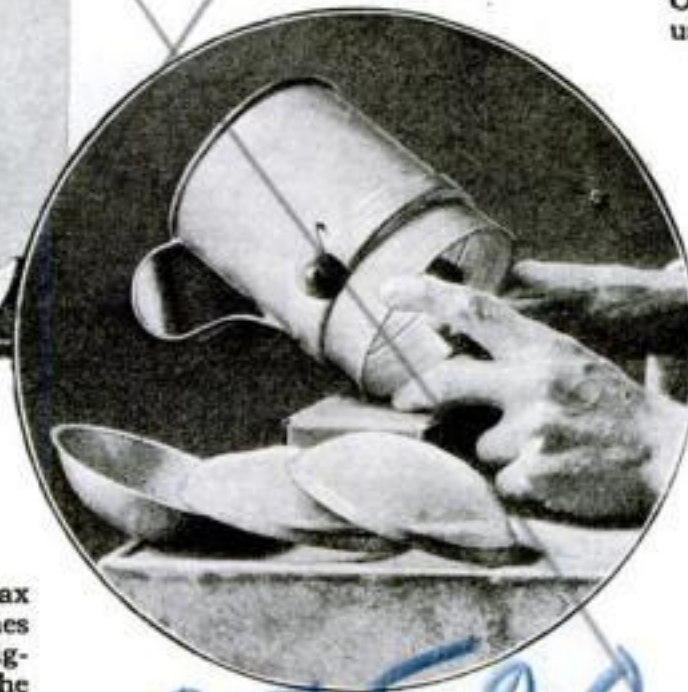

Here is a combination egg-beater, cake-mixer, jam-strainer and flour-sifter—a compact utensil for all these purposes



A fork and spoon are hinged together in this utensil to form a handy sand tong. They can be used separately, if desired, for the hinge may be released easily whenever it is necessary




Caring for wax floors becomes less of a drudgery with the sliding combination waxer, polisher and brush pictured below. It is about the weight of a carpet sweeper

A completely equipped, odorless kitchenette, which resembles a neat chest of drawers when closed, should appeal to the woman who has to keep house in limited quarters





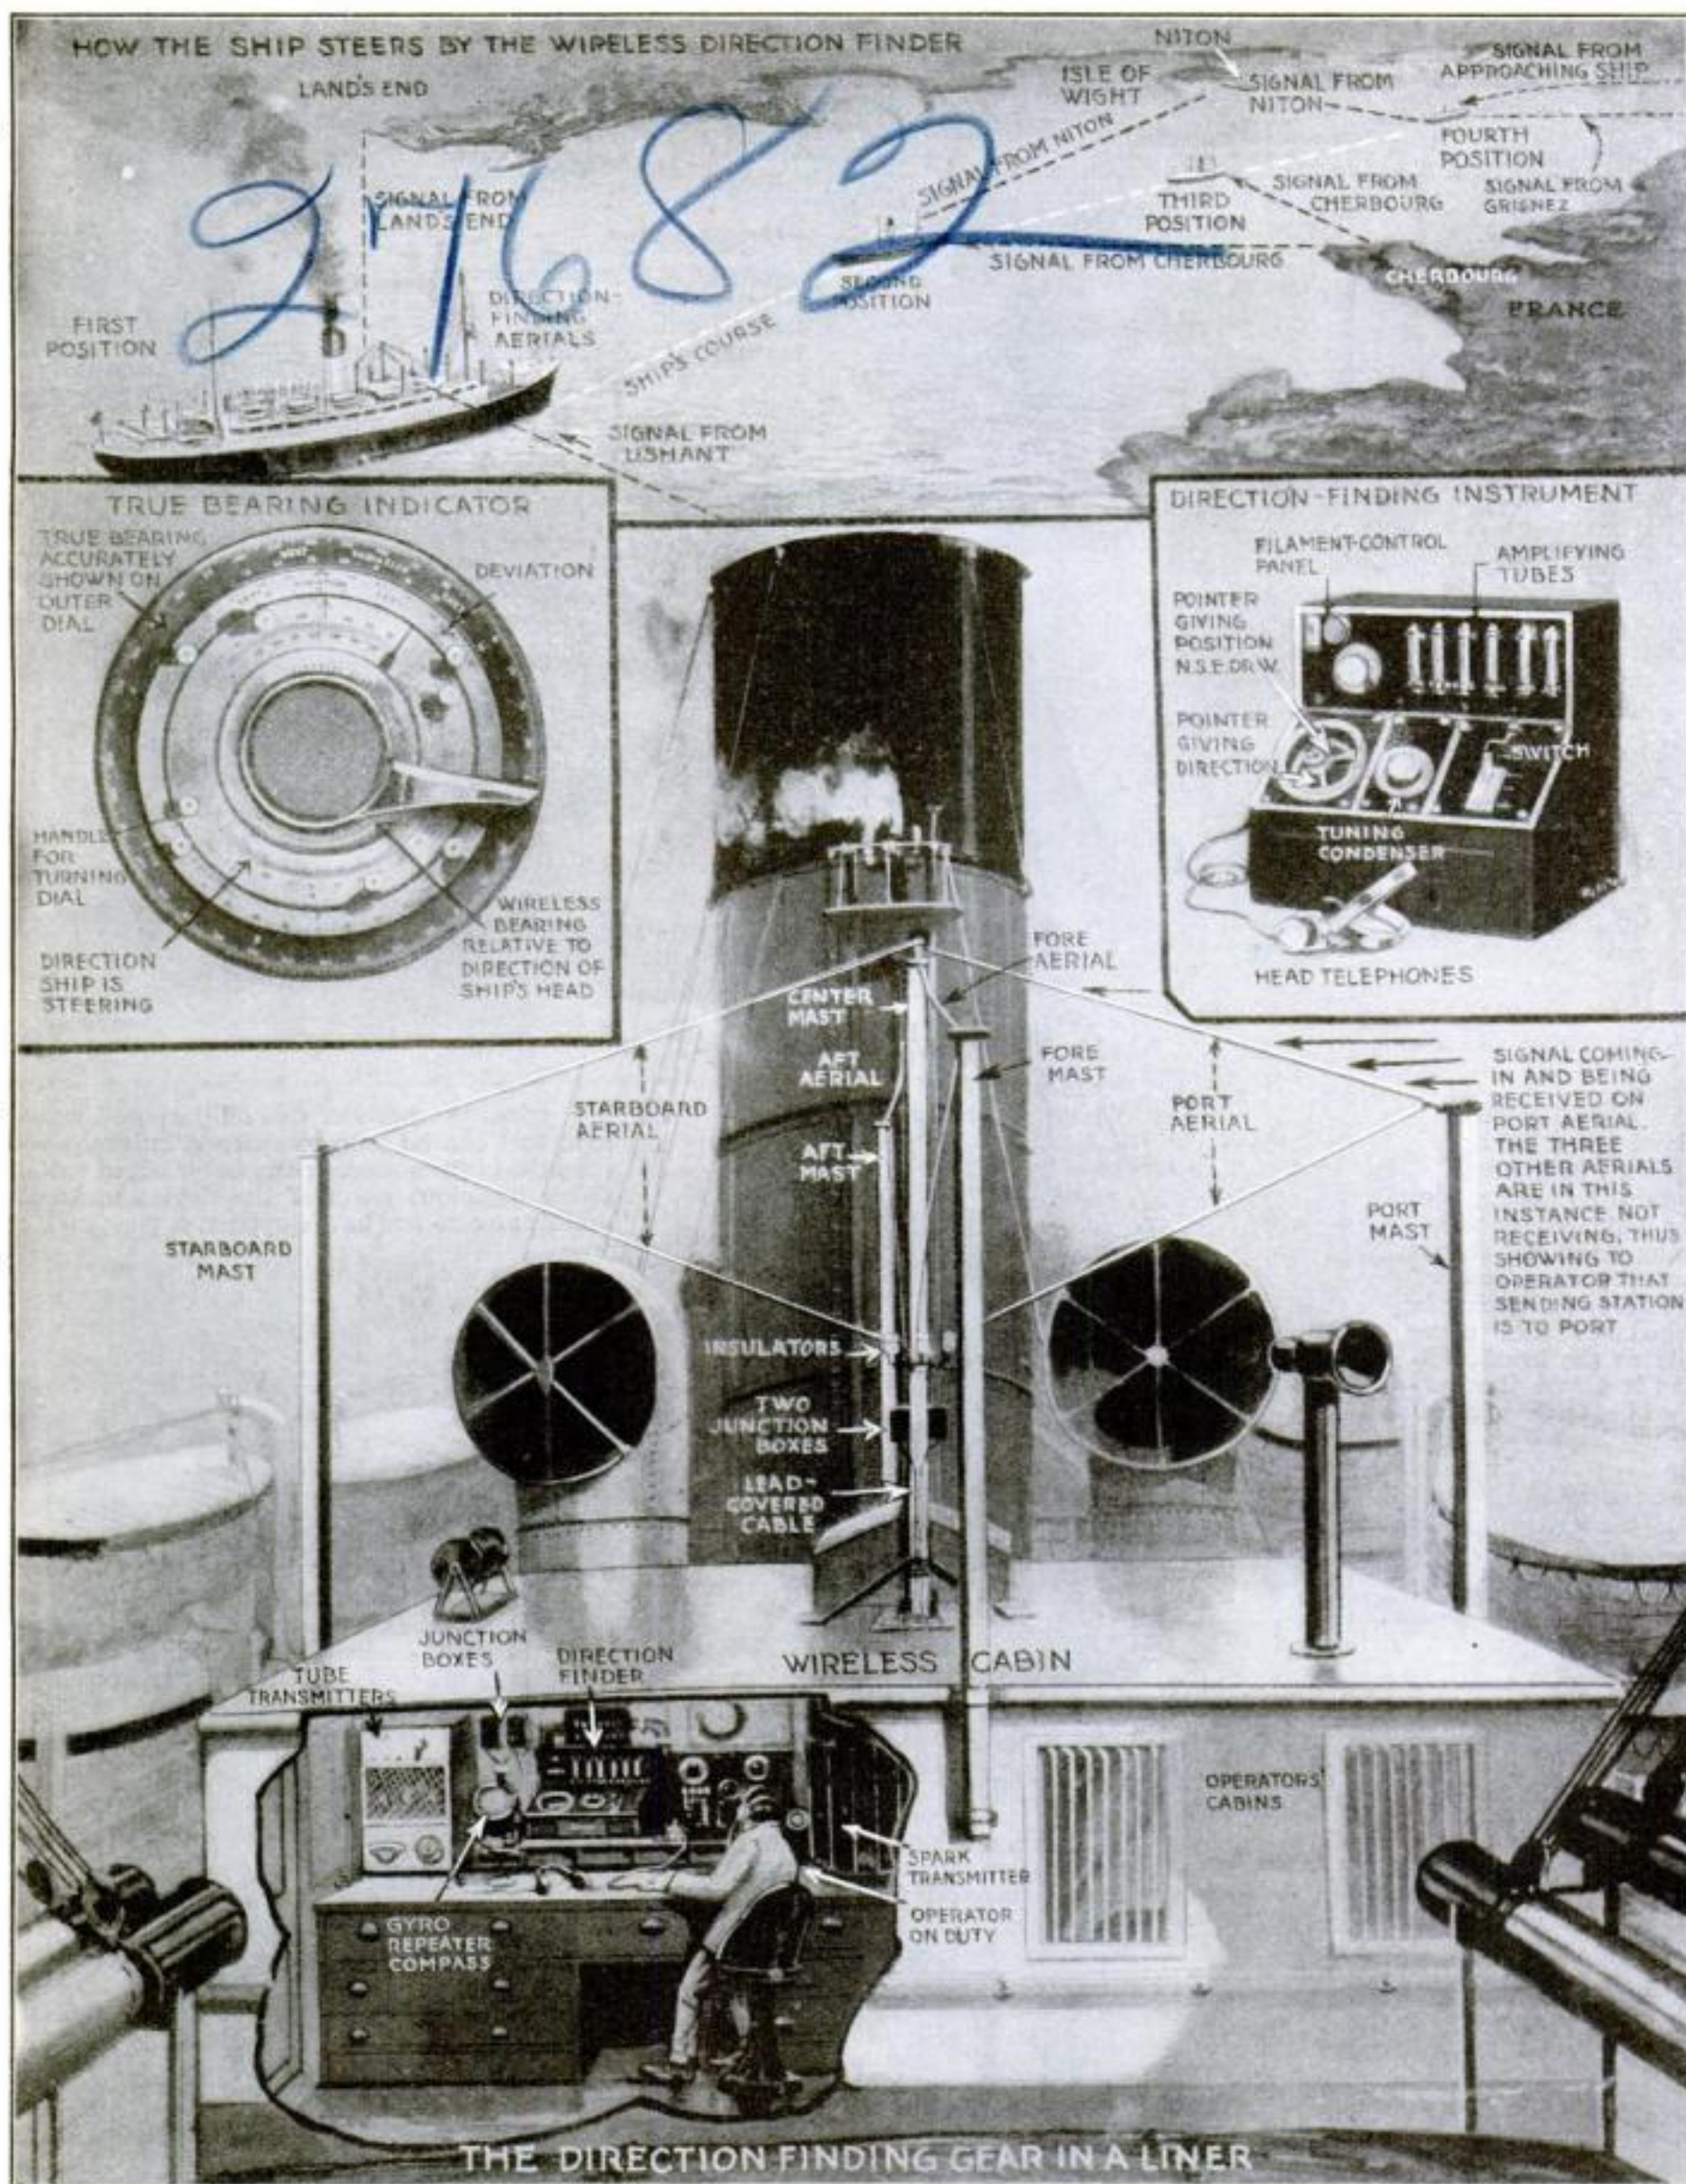

THE DIRECTION FINDING GEAR IN A LINER

## How Wireless Is Used to Steer Vessels into Port

**A**N ILLUSTRATED article in the December issue of POPULAR SCIENCE MONTHLY described an amazing new use for Marconi's system of reflected beam radio transmission—the "radio lighthouse" which, in recent tests, has proved successful in guiding ships through heavy fogs.

The illustrations above show the apparatus that enables the ship pilot to get his bearings by these radio signals from shore. The top picture represents a steamer being guided through the English Channel by them.

Four aerials on the ship receive signals from every direction. The aerial on which

the sound comes in loudest is the one nearest the transmitting station. On receipt of the signal, the operator determines, by the direction-finding instrument, its exact direction. This is sent to the navigating officer who, manipulating the dials of an indicator, finds out the true bearing of the ship.



# Your Dials—Keys to the Air

Radio Expert Tells How  
to Tune Your Set  
for Best Results

By Jack Binns  
America's Most  
Popular Writer  
on Radio

**T**HERE are certain little knacks in tuning a radio set that come with experience and knowledge of the set itself, but that can be acquired by any novice without great difficulty. In this article I shall outline the best methods of tuning for each of the basic systems of reception in general use. Owing to the diversity of types of receivers, there will be a few variations that cannot possibly be covered, but the procedure that I shall describe will give you, I hope, sufficient information to act as a guide to the most satisfactory results.

The majority of crystal receivers employ either galena, or some synthetic substance very much like it. The actual adjustment of the crystal, therefore, is identical in all cases.

Receivers using a crystal alone, without vacuum tubes, are at once the simplest and most difficult to tune. This sounds paradoxical, but is true. In a large number of cases there is only one dial on the set, and in the majority not more than two. These are extremely simple to adjust, because a station will be heard over a large number of the degree marks on the dials. This part of the tuning consequently is simple. The difficult thing is to tune out an interfering station, whenever one is heard.

**B**EFORE proceeding further I am going to lay down a very imperative rule—one that applies to every type of radio receiver and to every operator. In turning any dial on your set, move it as if the whole world depended upon the slightest fraction of space between each of the degree marks on the edge of the dial. In other words, move it as slowly as you possibly can. For good results there is no variation to this rule.

Before signals can be received on a crystal set, the delicate little wire, often called the "catwhisker," which touches the glistening surface of the crystal must be in the right position, and it must rest on the surface

as lightly as possible. Experience will show that there are a few spots that give much louder response in the telephones than the rest of the surface of the crystal. These places are known as the "sensitive spots." Once one of these has been found, the crystal should be let alone until some accidental jar or shock knocks the wire off that particular spot, when a readjustment will be necessary. In doing so, move the wire very carefully and do not press it down.

If you happen to have a crystal set with a dial marked "coupling," keep this in the minimum position if you experience interference. If you have no such dial, and still get interference, then my advice is to shorten the length of your antenna. Remember that the maximum effective range is 50 miles. Do not try to reach out with your set by putting up a long antenna. Be content to get good clear re-


ception from your local stations with a minimum of interference.

The owner of a regenerative set owes it to the other radio fans to move his dials carefully. The regenerative receiver, properly constructed, is selective and sensitive. When poorly operated, however, it is a fairly powerful transmitter, and as such will cause interference to others. Moreover, when it is in a transmitting condition it is absolutely useless as a receiver, for it is uncontrollable.

There is a large variety of regenerative receivers, from a technical point of view. In addition, there are several different ways in which the control dials are marked. Invariably, however, they will fall within two groups: First, dials marked "Tuning," "Selector," or "Wavelength," for tuning in the desired station; second, dials marked "Regeneration," "Intensity," or "Volume," for controlling regeneration or the intensity of the signal.

Do not, under any circumstances, tune this type of receiver so that you get a sharp whistle of varied pitch. This is a sign that your set has ceased its proper function of receiving, and has transformed itself into a transmitter. In that condition it is of no value to you or any one else.

**B**EFORE you turn your set on, either with a battery switch, or by the little dials marked "Rheostat," set the regeneration dial at zero. Now tune with the dial that controls the wave length. Move the dial slowly until a station is heard. Then turn the regeneration or volume dial slowly up from zero. As you do so you will observe that the signals become stronger and stronger until finally they reach a point where they begin to sound mushy and blurred. Stop immediately and go back to the point just before they began to distort. Or, better yet, turn down the detector tube with the rheostat dial until the mushiness disappears. This method prolongs the

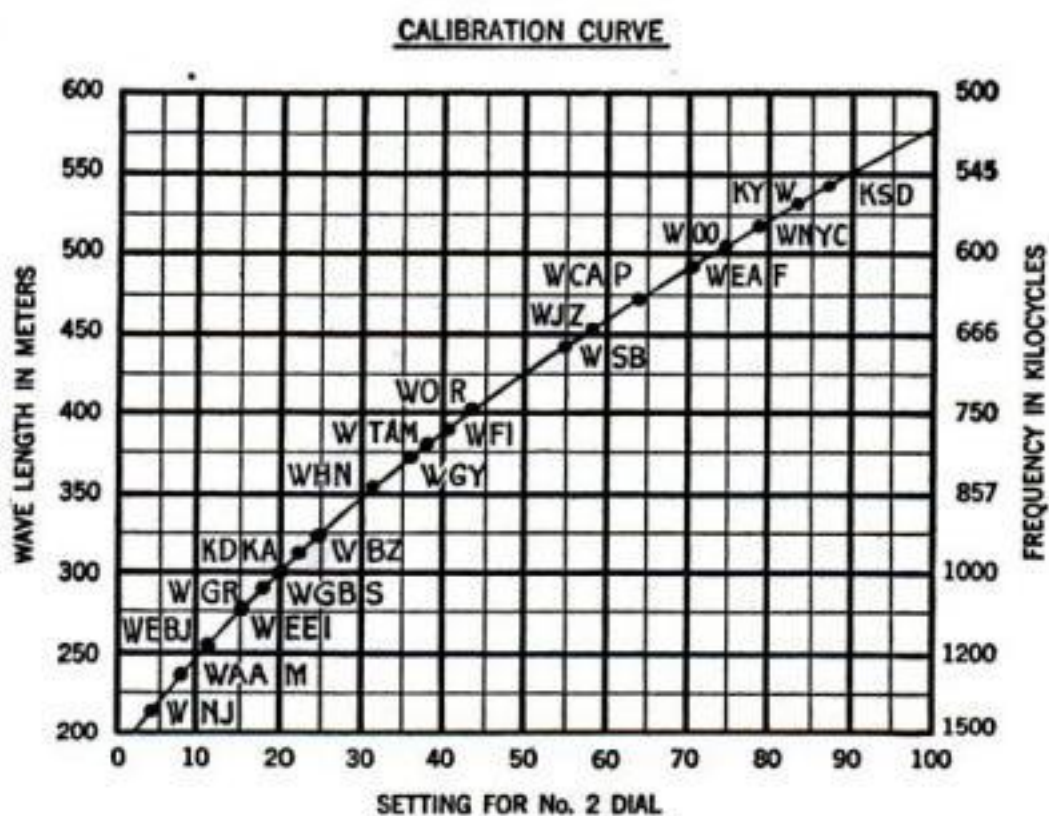

## A Quick and Easy Way to Dial Broadcasting Stations

On a sheet of paper ruled in squares, number the vertical lines from left to right to correspond with dial settings, from 0 to 100, as shown. Then, at the left side, number the horizontal lines for wave lengths, reading upward from 200 to 600. On the right side number the same lines for frequencies in kilocycles, reading downward from 500 to 1500. Now tune in five or six stations on your set, and note the dial reading for each. Then on the chart where the vertical line corresponding to each reading would intersect the horizontal line corresponding to the

wave length or frequency of the station, make a dot. When you have done this for each station, connect the dots with a line. This will give you a calibration curve, by which you can locate any other desired station on your dial simply by noting where the wave-length line for that station intersects your curve. The vertical line at this intersection gives you the dial reading. Of course, since the lines represent round numbers only a close approximation of the settings is possible; but usually you will find that this chart will be amply sufficient



life of the tube. Now advance the intensity dial again to the point where you get maximum signal strength without any distortion.

**N**OW you have tuned your set so that you can enjoy the broadcasting without disturbing your neighbor. Make a record of the settings of both dials so that you can tune in the station again when you want to listen to it. After a little practice you will be able to change from one wave length to another with a hand always on each dial so that you can keep your receiver from oscillating and yet have it adjusted so that it will be sensitive and selective.

You will find that as the battery that lights the vacuum tubes gets old or discharged, it will be necessary to increase the rheostat dial reading lightly. When a new or recharged battery is put into use, turn the rheostat down again.

The methods for tuning a reflex set apply to the six-tube portable radio-frequency sets and similar receivers. These types are operated under the same general principles — the only difference being that in reflex sets certain tubes are arranged to do double duty. In some of the reflex sets, an additional element of tuning is introduced through the use of a crystal detector.

The majority of receivers of the types mentioned above employ a loop of wire in place of the usual aerial and ground connections. For these the operators must have a fair knowledge of the compass points about their homes. With this knowledge they will find the following little tip of much value in tuning in distant stations, because it is very necessary that the edge of the loop be pointed directly toward the station they desire to hear.

**T**AKE a map of the country. On it spot your location. On most maps you will find an arrow at the top indicating north. Now get a little pocket compass and lay it on the map so that its needle points in the same direction as the arrow on the map. It then will be an easy matter to find the exact direction of the different stations within range of the set.

When searching for one of these stations, the first thing to do is to turn the loop so that its edge points in the right direction. Tuning the receiver to its correct wave length will follow after.

Most reflex sets have the following dials: One marked "Tuning" or "Wave length," another marked "Vernier," a third marked "Rheostat," and a fourth marked "Potentiometer" or "Volume." Where a crystal is employed, make sure that the delicate wire is resting on the surface of the crystal in the manner described under the directions for operating a crystal set.

As soon as the rheostat, or battery switch, has been turned on, it will be observed that there is a grinding noise in the loudspeaker if the potentiometer dial happens to be all

rheostat dials should be adjusted so that the lights are burning as dimly as possible consistent with clear, undistorted music or speech. This is a matter of economy to yourself, as well as a controlling factor in the degree of enjoyment you will get out of your set.

The majority of neutrodyne receivers have three large dials on the panel, although a few this year have only two. The tuning directions, however, apply to both types. In addition to the large dials, there are two or more rheostat dials to control the brilliancy of the tubes.

For most veteran radio fans the neutrodyne set is difficult to tune because there are no familiar noises to guide them. The tuning, however, is simple enough if the following rules are observed. It will be found in most cases that the three dials

are almost identical in their settings for any particular station. The best way for the new fan to proceed is as follows:

**S**TART with the second and third dials at the same setting, both at 55, for example. Now move dial No. 1 slowly between 50 and 60. If no signal is heard, move the second and third dials another degree either way, and then move the first dial over 10 degrees. Some station soon will be heard, and

maximum signals can be obtained with slight adjustments on all three dials. As soon as the station has been identified by its call letters, write down on a piece of paper the figures of each of


the three dials at which it was heard. When you desire that station again, just set the dials at those figures, and if the station is on the air and conditions are favorable, it will come in. The procedure in picking up distant stations is exactly the same.

**O**NCE four or five stations have been located, there is a simple method shown in the chart on page 83 by which new stations can be found without difficulty. This method can be used for any type of set.

Like all other sensitive receivers, the neutrodyne will, under certain circumstances, bring in atmospheric disturbances while you are listening to distant stations. If these static disturbances are very bad, they can be counteracted somewhat by slightly detuning the third dial either above or below the correct figure.

There are two types of super-heterodyne receivers in use. First, the home-built or built-to-order type, which ordinarily employs eight tubes; and, second, the factory-built receiver with six tubes. There is an important technical difference between the eight- and six-tube sets.

(Continued on page 159)

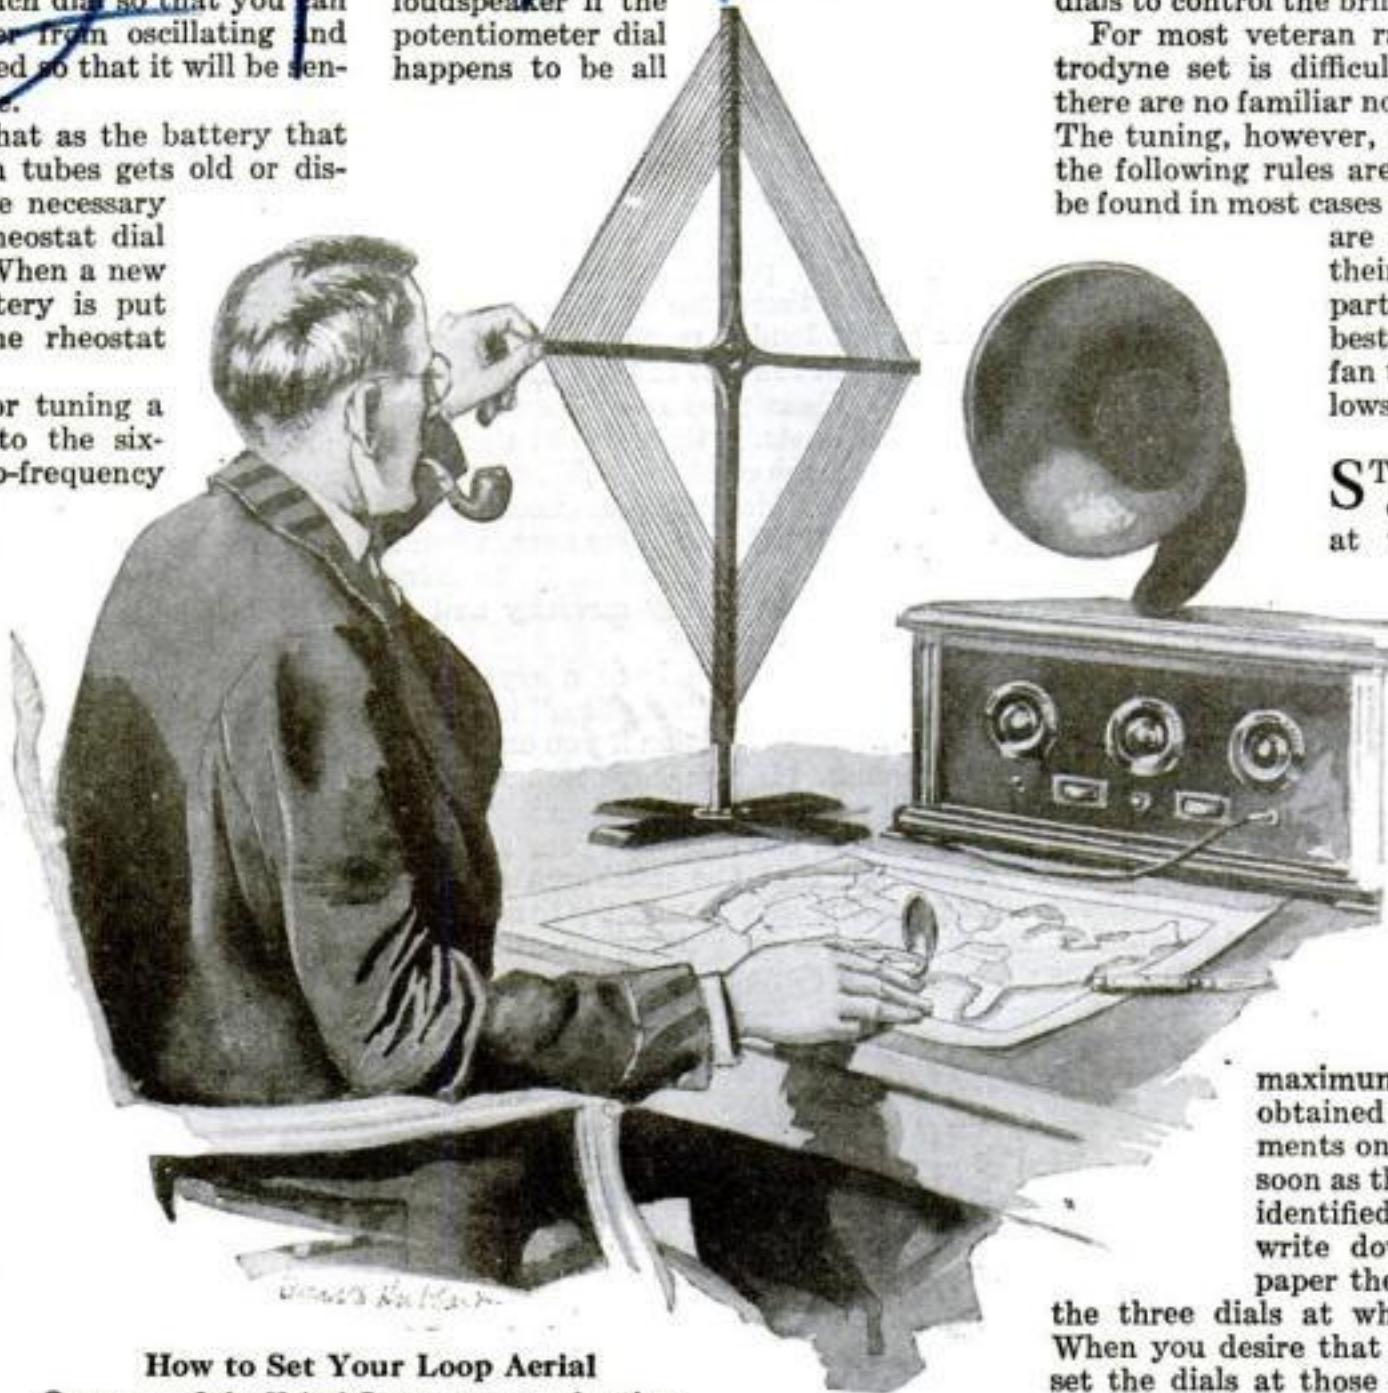

#### How to Set Your Loop Aerial

On a map of the United States spot your location. Then place a pocket compass on the map and adjust so that the compass needle points in the same direction as the arrow on the map indicating "north." It will then be easy to turn the edge of the loop in the direction of the broadcasting station you want to hear

the way over to one side—usually the left side. This dial should be changed slowly until the noise disappears. Now turn the wave-length dial very slowly until some station is heard. It may be quite possible that the receiver will whistle just as a regenerative receiver does when badly adjusted. In this case a slight adjustment of the potentiometer dial will remedy the trouble. When a station has been brought in, move the dial marked "Vernier" until the signals are loudest and clearest. A little more adjustment on the potentiometer dial will remove any mush or distortion. As a general rule, this dial should be left in that position, but in bringing in distant stations it may be necessary to advance it a little toward the side that eventually brings on mushiness.

In all radio receivers, irrespective of type, where vacuum tubes are used, the



# How to Do Good Soldering

## The Easiest and Quickest Way to Make Radio Connections

By John Carr

ONE of the main reasons why so many of the manufacturers of radio parts are fitting their instruments with solder lugs is because soldering is the easiest, quickest, and best way to make electrical connections.

Beginners are inclined to doubt this fact after their first session with a

Solder should be made of equal parts of tin and lead, but unfortunately a great deal of solder sold today contains very little tin. Such solder does not flow easily and is difficult to work with. Tin is more expensive than lead, which accounts for the lack of it in cheap solder. Be sure that the solder you buy is of the best grade.

Another form of solder that is much used in electrical work is the rosin-core solder. It con-

requires a somewhat hotter iron than many of the other fluxes.

The type of pliers shown in the illustration is not necessarily the best; any pliers that will cut wire and hold it in position while soldering will do.

ASSUMING that you have purchased the necessary equipment, the first step is to prepare the copper. This process is known as "tinning." If the end of the copper is not clean and shiny, it should be made so with a file. It should

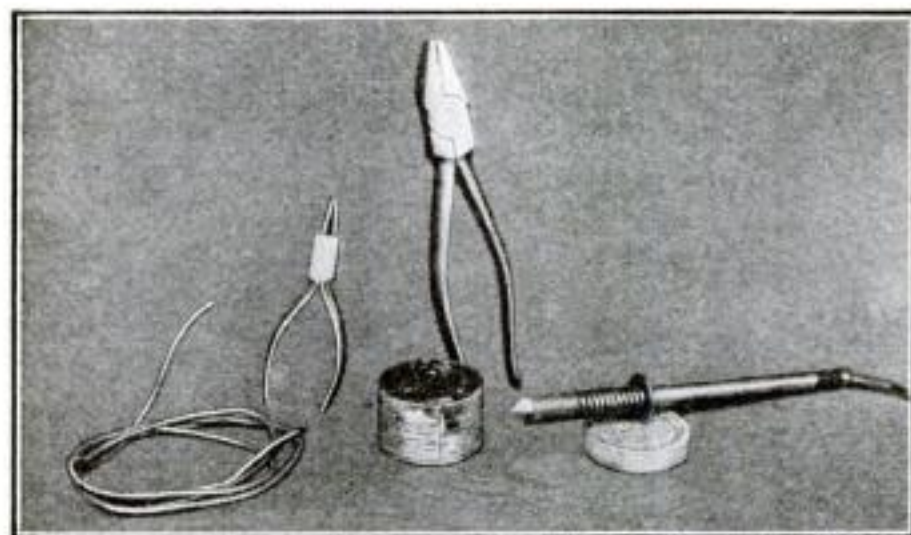


Fig. 1. The equipment you need for a good soldering job (at left) includes strip solder, paste, pliers, and a soldering copper. The copper shown is electrically heated, but the old style works as well.

soldering iron chiefly because they do not know how it should be done. And the matter of proper equipment is vital, for even an expert cannot turn out a good job of soldered wiring if he has not the right material to work with.

Really, there are just three essentials to good solder work of the kind required in radio construction. They are: A soldering copper (often called "soldering iron," although it is always made of solid copper) heated to the proper temperature, high grade strip solder, and a paste or other flux that will make the solder flow over and form intimate contact with the surfaces of the metal parts to be joined.

Figure 1 illustrates all the equipment you need. An electrically heated soldering copper is not necessary—just as good work can be done with the old style soldering copper, but an electric outfit saves the time that otherwise would be wasted in waiting for the copper to heat up between connections and also eliminates many trips back and forth to the kitchen range.

THERE are several kinds of soldering paste on the market and most of them are excellent, but any brand that contains acid should be carefully avoided in electrical work because of the danger of short circuits and corroded connections.

Strip solder is easier to work with than the kind that comes in solid bars, especially for electrical work where small coppers ordinarily are used. Bar solder will cool the copper before the solder melts from the end of the bar.

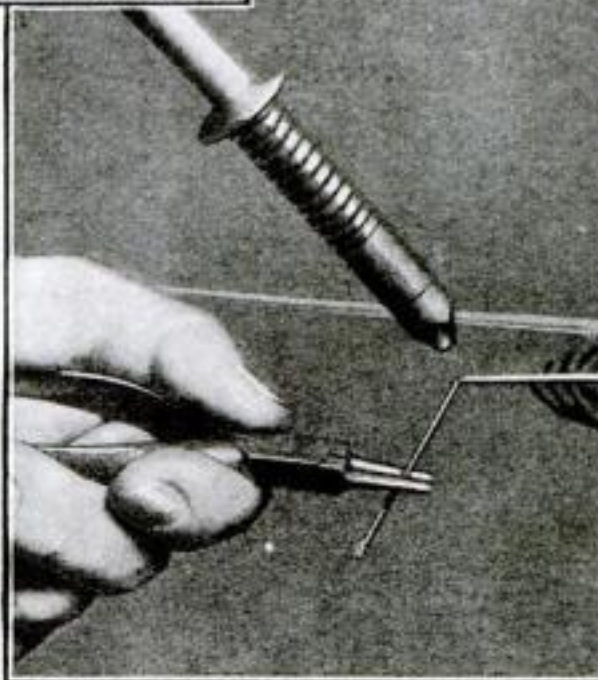


Fig. 2. Soldering a joint. Hold the ends of the wires together and touch the joint with the drop of solder on the end of the copper

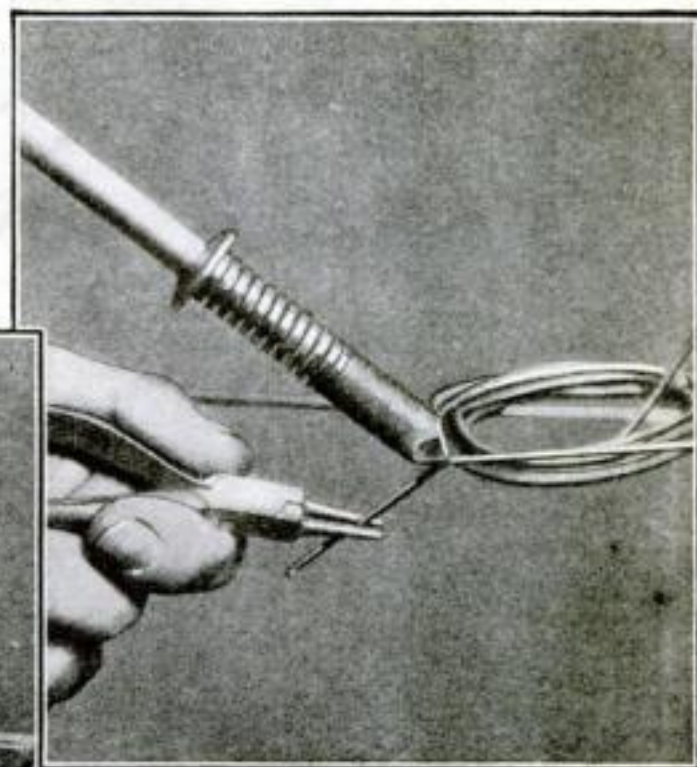


Fig. 3. Completing the joint. Hold the end of the copper on the connection until the solder flows into the joint and over the ends of the wires

then be heated to the point where it hisses when jabbed into the soldering paste. Stick it in the can of soldering paste several times and then rub the end with the strip solder until the surface is covered with a smooth coating of solder that closely adheres to the metal. The best test for tinning is to rub the end of the soldering copper on a piece of woolen cloth and if the solder cannot be removed, the copper is properly tinned, as shown in Fig. 1.

Before you actually start to solder the connections in the radio set you have just built, it is a good plan to practice a bit on short lengths of bus wire until you have mastered the knack of it.

If you are using soldering paste, dip the ends of the wires to be joined in the paste. Now melt enough of the solder on the tinned portion of the copper to form a small

drop on the end. Next, hold the ends of the wires together, and touch them with the tip of the copper so that the drop of

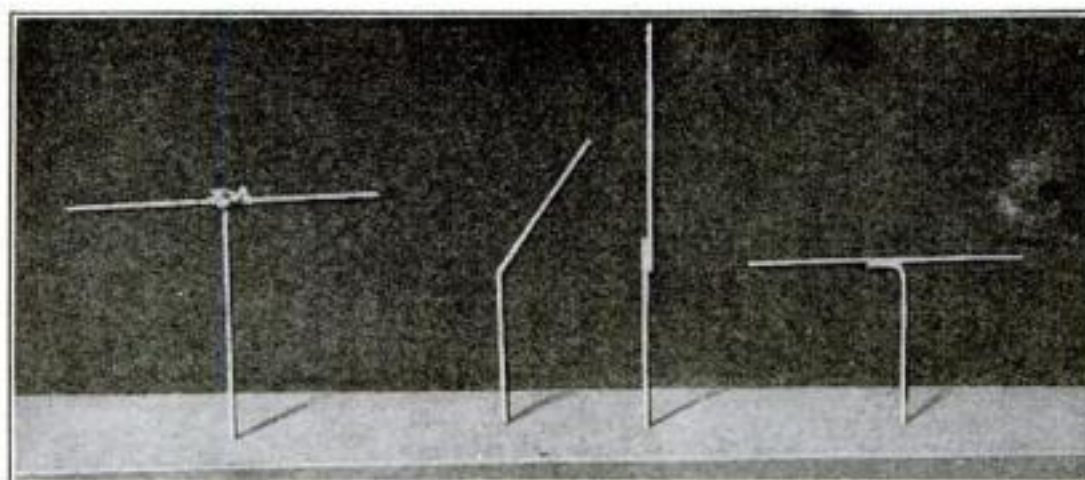


Fig. 4. Four kinds of soldered joints. The one at the extreme left shows how not to do it. The second from the left is the joint made in Figs. 2 and 3. The

third and fourth joints show how the wires should be overlapped if they are to be subjected to strain. Notice how neatly the joints can be made with practice

sists of a small tube of solder filled with rosin, which acts as a flux and eliminates the need for a separate flux or paste. It makes an ideal joint for electrical use, but

(Continued on page 160)



# A Four-Tube Set to Fit Your Phonograph Cabinet

## How to Build an Economical Receiver of Unusual Tone Quality

By Alfred P. Lane

**H**ERE is a radio receiving set arranged so that you can fit it in the record compartment of almost any standard phonograph. And it is a set that is well worth building, because it combines sensitiveness and selectivity with ease of control and the finest possible reproduction of broadcast music and speech.

The circuit is the familiar three-coil regenerative detector plus one stage of transformer-coupled audio-amplification and two stages of resistance-coupled audio-amplification.

Radio fans who never have tried resistance-coupled amplification will be astonished at the quality of reproduction of this receiver. There is no difference whatever between the first stage and the last stage in the way of tone or clearness, and with 90 volts of B battery, the volume on local stations with four tubes going is too great for most loudspeakers.


and these are well covered by the dials. The low-loss idea has been carried out in the design of the detector-circuit wiring and in the elimination of special mountings for the coupling condensers, the

tubing. Tuning is simple, for there are only two dials and the control of regeneration need not be particularly critical except on distant stations.

The set also is economical to maintain, because it is not necessary to keep all the tubes going when you are listening to programs from local stations. The use of three switches gives you all the power you need for various conditions. The series connection of the switches prevents leaving one or two tubes burning in your absence, for the right-hand switch *R1* cuts off all the tubes, regardless of the position of the two other switches.

**A** RHEOSTAT in the filament circuit of each tube makes it possible to operate the tubes at the lowest possible temperature consistent with full volume.

The receiver is arranged to use 6-volt storage-battery tubes of

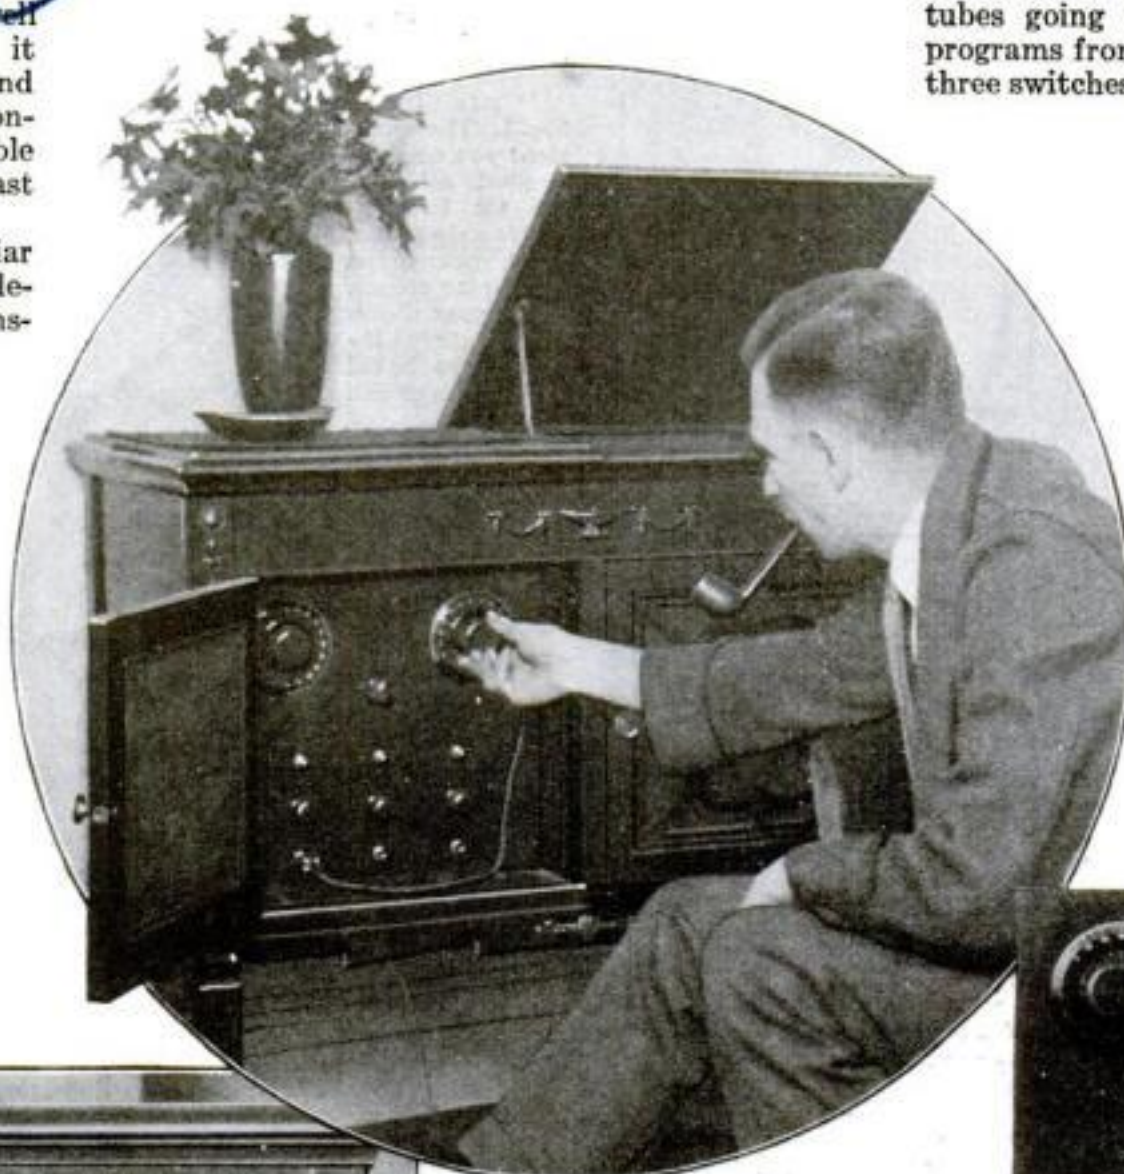

The four-tube set completed and installed by Mr. Lane in a phonograph cabinet. This is the set he tells you how to build in the accompanying article. It is now in the home of Robert S. Dietrich, of Brooklyn, N. Y., who is shown tuning it to a distant station.

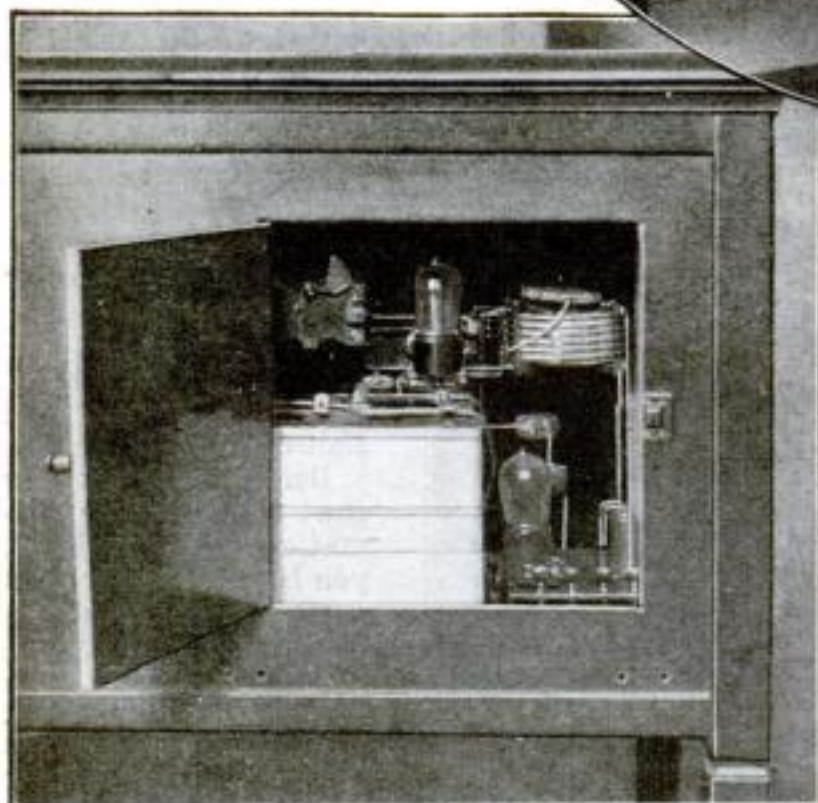


Fig. 1. The door cut in the back of the cabinet. Notice how the B batteries are placed at the back of the set.

The construction includes several new wrinkles in wiring and in the elimination of unsightly screws. In fact, there are no screw holes whatever in the front panel *S*, except those used to support the variable condenser *D* and the tuning unit *A*, *B*, *C*,

plate resistances, and the grid leaks. The wiring has been reduced to the simplest possible form by the arrangement of the parts in the set and by placing all of the battery and filament wiring under the sub-panel *T* and incasing it in spaghetti

the usual  $\frac{1}{4}$ -ampere type. Dry-battery tubes of either the  $1\frac{1}{2}$ - or 3-volt type can be used without changing the set, unless you use rheostats that are suitable for only one type of tube, in which case the rheostats will have to be changed.

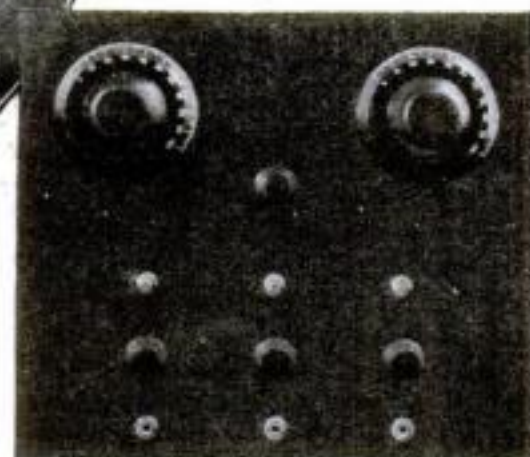


Fig. 3. The symmetrical layout of the front panel, showing wave-length dial (upper right), regeneration dial (upper left), rheostat knobs, jacks, and switches.

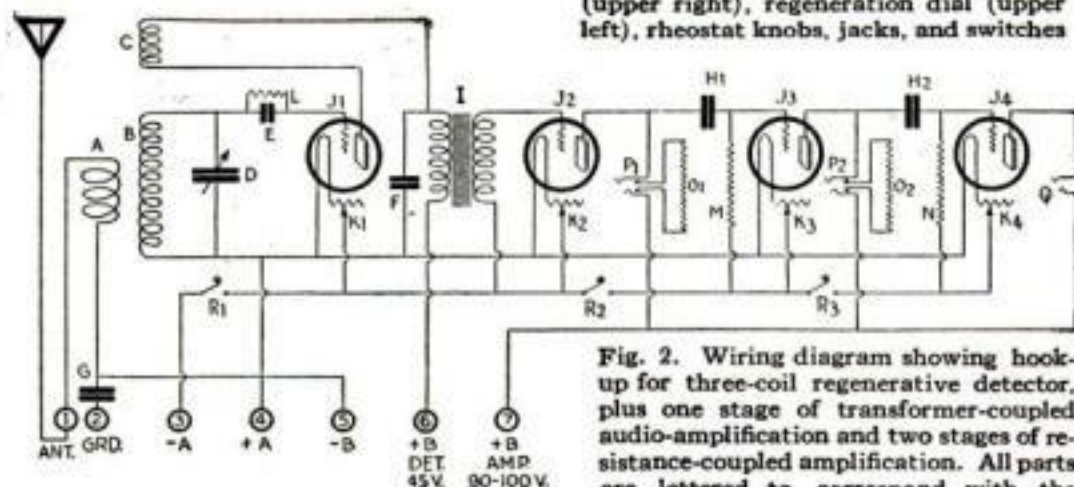


Fig. 2. Wiring diagram showing hook-up for three-coil regenerative detector, plus one stage of transformer-coupled audio-amplification and two stages of resistance-coupled amplification. All parts are lettered to correspond with the illustrations on the opposite page.



The large-capacity condenser *G* is included in the circuit so that the *A* or *B* battery may be charged by any type of charger without danger of blowing the fuses.

### THE PARTS YOU WILL NEED

*A, B, and C*—Low-loss tuning unit

*D*—Low-loss variable condenser, .0005 microfarad

*E*—Grid condenser, .00025 microfarad, with clips for grid leak

*F*—By-pass condenser, .0005 microfarad

*G*—By-pass condenser, .5 microfarad

*H1 and H2*—Coupling condensers, .012 microfarad (two pairs of .006-microfarad fixed condensers with solder lugs)

*I*—Audio-frequency transformer

*J1, J2, J3, and J4*—Standard vacuum-tube sockets

*K1, K2, K3, and K4*—Rheostats for  $\frac{1}{4}$ -ampere, 6-volt tubes

*L*—Grid leak, 2 megohms

*M*—Grid leak, 1 megohm

*N*—Grid leak, .5 megohm

*O1 and O2*—Fixed resistances, 100,000 ohms

*P1 and P2*—Double-circuit jacks

*Q*—Open-circuit jack

*R1, R2, and R3*—Battery switches

*S*—Panel, 13 by 14½ inches

*T*—Sub-panel, 7 by 13 inches

*U*—Sub-panel, 2¼ by 4 inches

Two brass right-angle brackets, two 4-inch dials, 7 binding posts, 4 tubes, screws, bus-wire, etc.

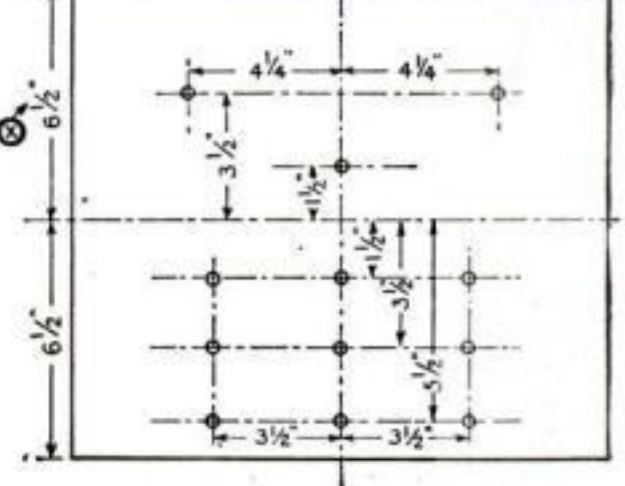


Fig. 5. Diagram showing measurements for the panel layout. The measurements for *X, Y, and Z* may be varied to suit the size of the particular type cabinet you use

The tuning unit, *A, B, C*, can be bought complete, or you can build it yourself. The primary, *A*, consists of 6 turns of No. 14 bare copper wire, 4 inches in diameter and spaced  $\frac{1}{4}$  inch between turns. The secondary, *B*, is 47 turns of No. 16 double-cotton-covered wire wound around 15 pegs set in a 3¾-inch circle by the around two, skip two method described in POPULAR SCIENCE MONTHLY for January.

THE tickler coil, *C*, was wound around 15 wooden pegs set into a wooden hub 1½ inches in diameter, with 44 turns of No. 20 double-cotton-covered wire. The coils are held in place by clamping between strips of bakelite. The shaft for the tickler coil, *C*, is a ¼-inch bakelite rod, so that no metal is used in the construction of the tuning unit except the small screws.

Any good make of low-loss condenser may be used, but the capacity should be .0005 microfarad if a secondary coil such

as described is used. It is extremely important to use a high quality audio transformer, since the advantage of resistance coupling is lost if the audio transformer in the first stage produces an appreciable degree of distortion.

Any of the standard makes of switches, rheostats, or sockets may be used, but the jacks should be of the type shown in this set, since the frames of the jacks are used to support the sub-panel *T*. There are a number of makes of this general type.

Any make of fixed resistances and grid leaks may be used, provided they are of

ment of the phonograph cabinet.

Now, cut out a paper pattern the exact size of the panel and paste it to the panel with library paste. Measure off the positions of the holes on the paper. Note that only the centers for the shafts are given, because many standard instruments are single-hole mounting and the others vary considerably as to the location of the screws for mounting.

After you have the centers of the shafts located, use the paper templet that comes with each instrument requiring mounting

(Continued on page 162)

the correct value. The front panel of this particular set was made of mahogany-finished bakelite, but that is a matter of personal choice—any material will do, provided it is stiff enough to hold the entire weight of the set, which is supported on the front panel.

THE size of the front panel *S* is 13 by 14½ inches, but these dimensions can be altered to fit the size of the record compartment of the phonograph. Because of this possible variation in the panel size, the spacing of holes in Fig. 5 and the layout for panel *S* are given from the center lines, and any changes in the panel size should be in dimensions *X, Y, and Z*. The panel, of course,

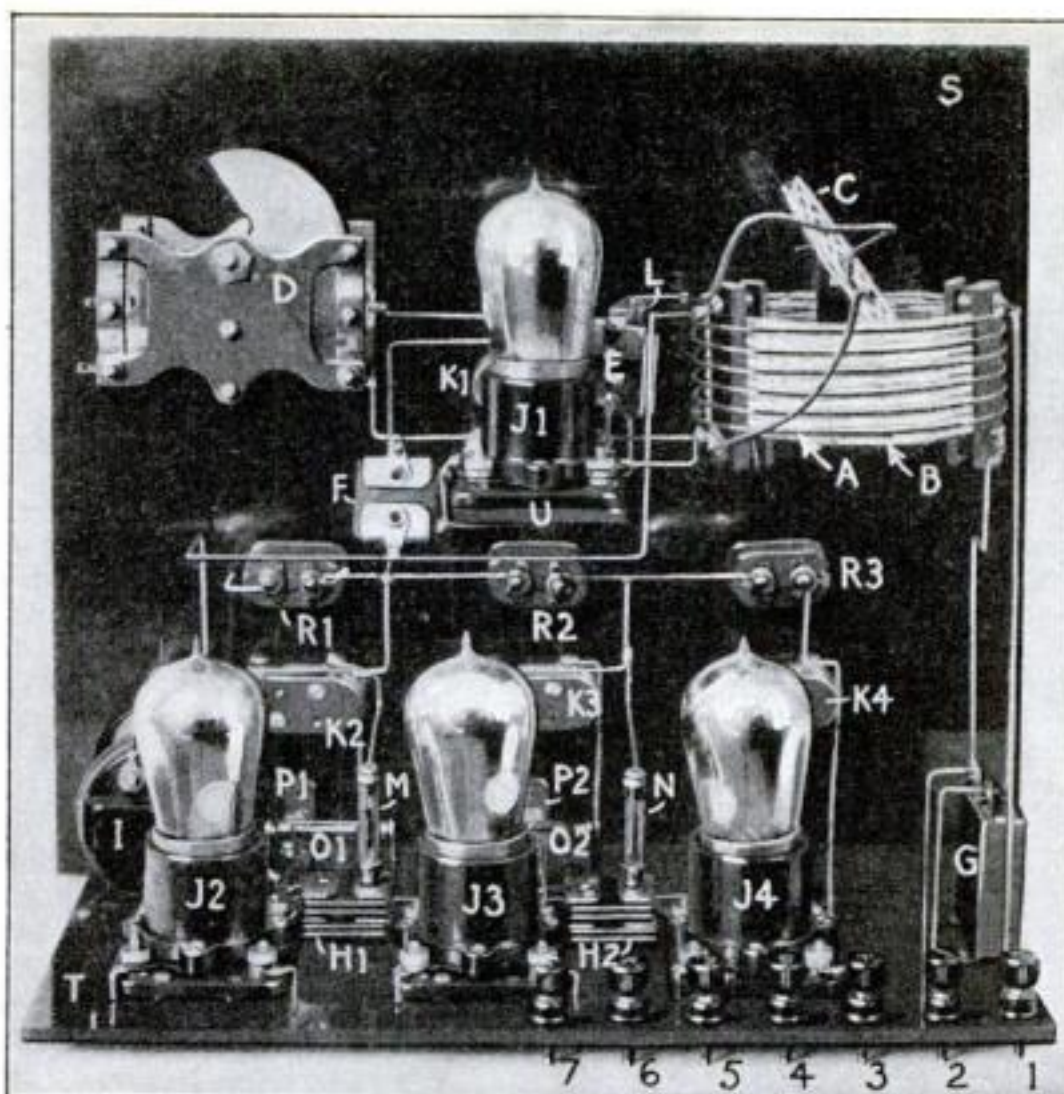


Fig. 4. Rear view of the complete set (above), showing layout of parts and wiring. All parts are lettered to correspond with the wiring diagram on the opposite page. The wiring of the set is unusually simple if the instructions are followed out carefully

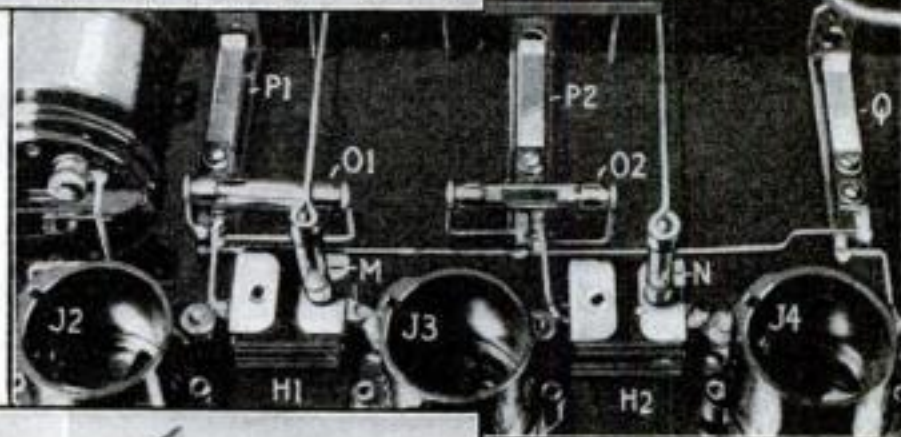


Fig. 6. Details of the resistance coupling, showing how coupling condensers, plate resistances, and grid leaks are arranged compactly on resistance-coupled stages

can be made as large as necessary, and if 3-inch dials are used, 1 inch can be subtracted from dimension *X* and ½ inch from dimensions *Y* and *Z*, making a minimum size of 12 by 13 inches.

### HOW TO BUILD THE RECEIVER

After you have purchased all the parts, the first step is to cut the panel *S* to a size that will fit the record compart-

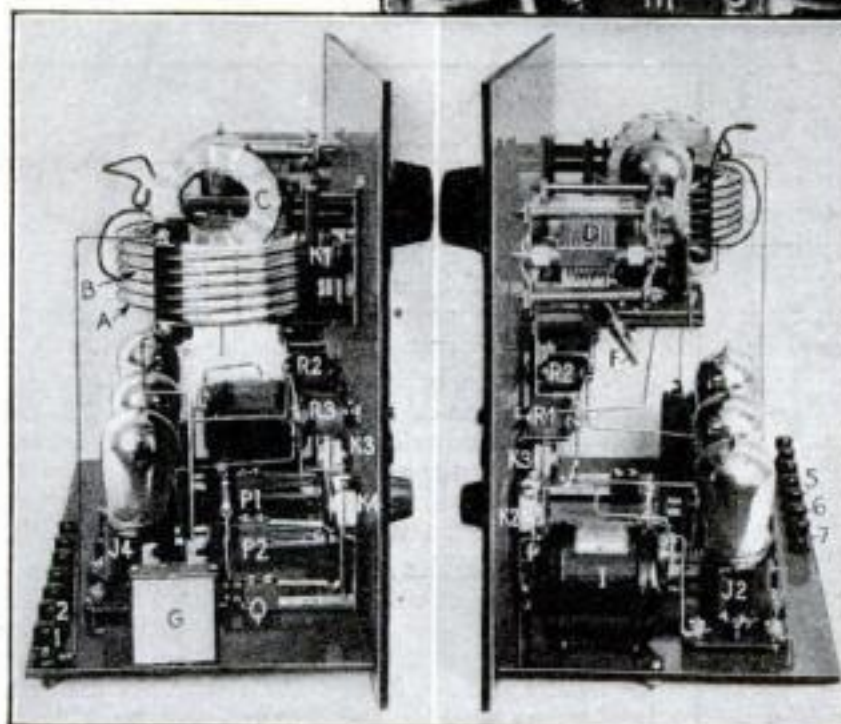


Fig. 7. Left-hand view

Fig. 8. Right-hand view



# How Radio Gyps Duped Me

The Story of a Victim Who Built a Set of Junk

*As Told to Newton Burke*

AS A radio fan, I am no longer a beginner—at least I have reached a point in my pursuit of the mystery of radio where I find a little less mystery and hear a little more radio.

It all began during what might well be called the gold-rush days of radio, when the craze had obtained its first hold on the imagination of the public. Hordes of newly made radio fans fought madly at every radio-store counter for the small consignments of parts that came in from manufacturers buried in a sea of rush orders.

The radio craze first hit me one Saturday afternoon. It all seemed so delightfully easy. All you had to do was to string a wire on the roof, connect some wires to various apparently simple electrical instruments and, presto! Music would flow into your ears from all over the country.

By Monday morning I was firmly determined to acquire a radio outfit before another day had passed. As soon as I could, I headed for the nearest radio store, where I mentioned humbly that I was interested in buying a radio set.

"Do you want one of the cat-whisker type or would you prefer an audion detector?" the clerk inquired condescendingly.

That dazed me for a moment, and then I recovered sufficiently to ask the price of each type. It developed that the set which I understood employed part of a cat would cost in the neighborhood of \$25, while the set using the other device would run to all of \$75, including the storage battery and the various accessories, which the clerk assured me were quite necessary.

I PAID \$25 for the cat's whisker and what went with it, and spent the whole evening installing the outfit according to the alleged simple direction sheet.

Yes, it worked—I lived less than a mile from old WJZ, which was then located in Newark, N. J.; but somehow the tuning lever did not seem to be of much use. If WJZ was broadcasting, I could always get the station most anywhere on the dial, and if it wasn't, no amount of tuning would bring in any other station.

For several months the crystal outfit kept me satisfied. Then I began to long to hear distant stations. That meant a tube set, so I read all the radio literature I

could find and wasted reams of paper drawing diagrams of the wonderful receiving set I was going to build.

Finally I worked out the plans for a receiver that I was positive would be a world-beater.

know, for that wonderful first set of mine was made of them—all but the panel, which really was made of the material advertised on the sign.

I WAS an easy mark for those "gyps," and the way they handed me absolute junk in exchange for my hard-earned dollars was a crime.

The plates of the variable condenser were supposed to be aluminum, but a spell of damp weather left them with a beautiful coat of rust, and subsequently I found that a horseshoe magnet stuck to them like a long-lost brother.

There was a variometer in the original hook-up, I remember, and it looked

pretty good when I bought it; but I left it standing in the hot sun for several hours one day and the whole business actually softened and sagged out of shape so I could no longer turn the rotor. The tube socket, too, was an excellent example of "gyp" manufacture. I think it was made of the same material they use for

molding the clay disks that trapshooters aim at with shotguns. Certainly it was brittle enough—my screwdriver slipped while I was assembling the set and struck the side of the socket a very gentle blow, whereupon a large piece dropped out.

Really, it was a tribute to the broadcasting stations in operation at the time that the set brought in anything at all.

I COULD go on and tell, part by part, just how each instrument finally revealed itself as a fraud and had to be replaced with the genuine article. Eventually, the whole receiver was rebuilt.

The matter of "gyp" parts no longer bothers me, for I have learned to know genuine parts when I see them and I am familiar with the trademarks of most of the reliable manufacturers. Still, it was a pleasure the other day to note, as I walked by the store where I bought my first set of parts, that the "gyp" who ran the place finally had gone to the wall and that an auction sale was being held under the unfeeling direction of the sheriff.

For the sake of all those who are just starting in the radio game now, it is a pity that many of the "gyp" fraternity are still in business. Doubtless there are still thousands of beginners who will have to learn by experience as I did.



"I was an easy mark for those gyps. In exchange for my hard-earned dollars they handed me parts that were almost useless—

an "aluminum" variable condenser that rusted, a variometer that melted in the sun, and a tube socket that broke when I tapped it"

## The Proof of Reliability

IN OUR December issue appeared the Confessions of a Radio Gyp, who told the inside story of how the cheaters among radio merchants "bootleg" tubes, fake condensers, coils, and other apparatus.

Here is the other side of the same story—the confessions of a fan who was duped by the radio gyps and who paid dearly for his experience. What he says should prove helpful in pointing out the pitfalls and swindles in the path of the man who is just starting in radio.


By stamping its seal of approval on the products of reliable radio manufacturers, the Popular Science Institute of Standards is helping to force the gyps out of the radio field; so that the day is not far distant when the novice, as well as the expert, will be able to buy sets and parts with the assurance that they are reliable. In the meantime, the beginner will do well to stick to manufacturers and dealers who have established reputations for honest merchandise and fair play to the buyer.

By this time a change had taken place in the radio market. The tremendous demand, coupled with the inability of the legitimate manufacturers to fill the orders, brought a lot of fly-by-nights into the game with plausible-looking substitutes for almost any of the standard radio parts. That these "gyp" parts were almost useless goes without saying. I




# The Month's Curiosities in Radio

## A Multiple Hook-Up—Unusual Sets and Accessories

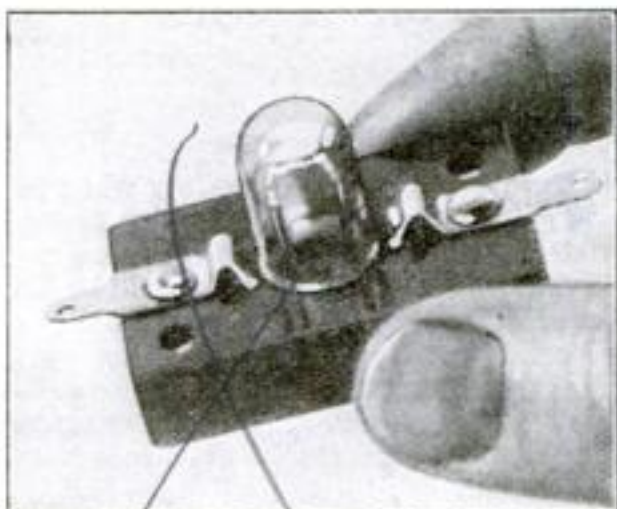


### This Fan Tries Them All

According to Peter Testan, Jr., of Brooklyn, N. Y., the only way to find out which type of receiving set gives best results is to test them all under exactly the same conditions. In his laboratory shown below, he has an elaborate collection of radio receivers, including nearly all of the popular types. A switching arrangement permits him to shift instantly from one set to another so that he is in a position to judge value in the reception of distant and local stations

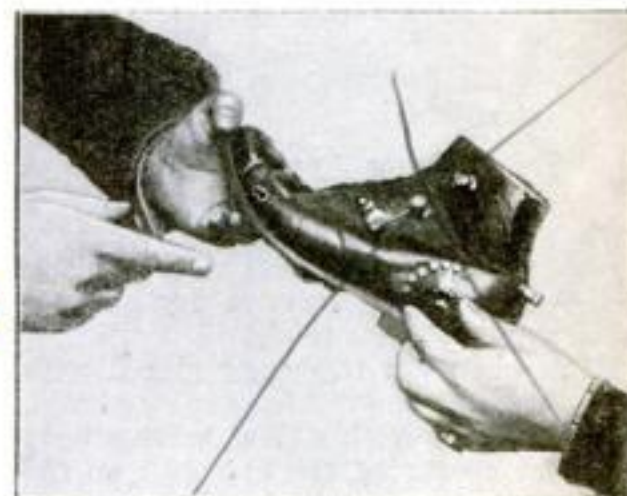


### Old Shoe Houses Radio

Here is a perfect receiving set, built in an old shoe by Elaine Rabinoff, which carried off a prize in the novelty class at the recent radio show in Chicago. It is a crystal receiver, and on test showed efficiency about equal to similar small crystal sets built in a more conventional form. Notice the tuning dial at the side of the shoe near the heel, and the binding posts for buttons

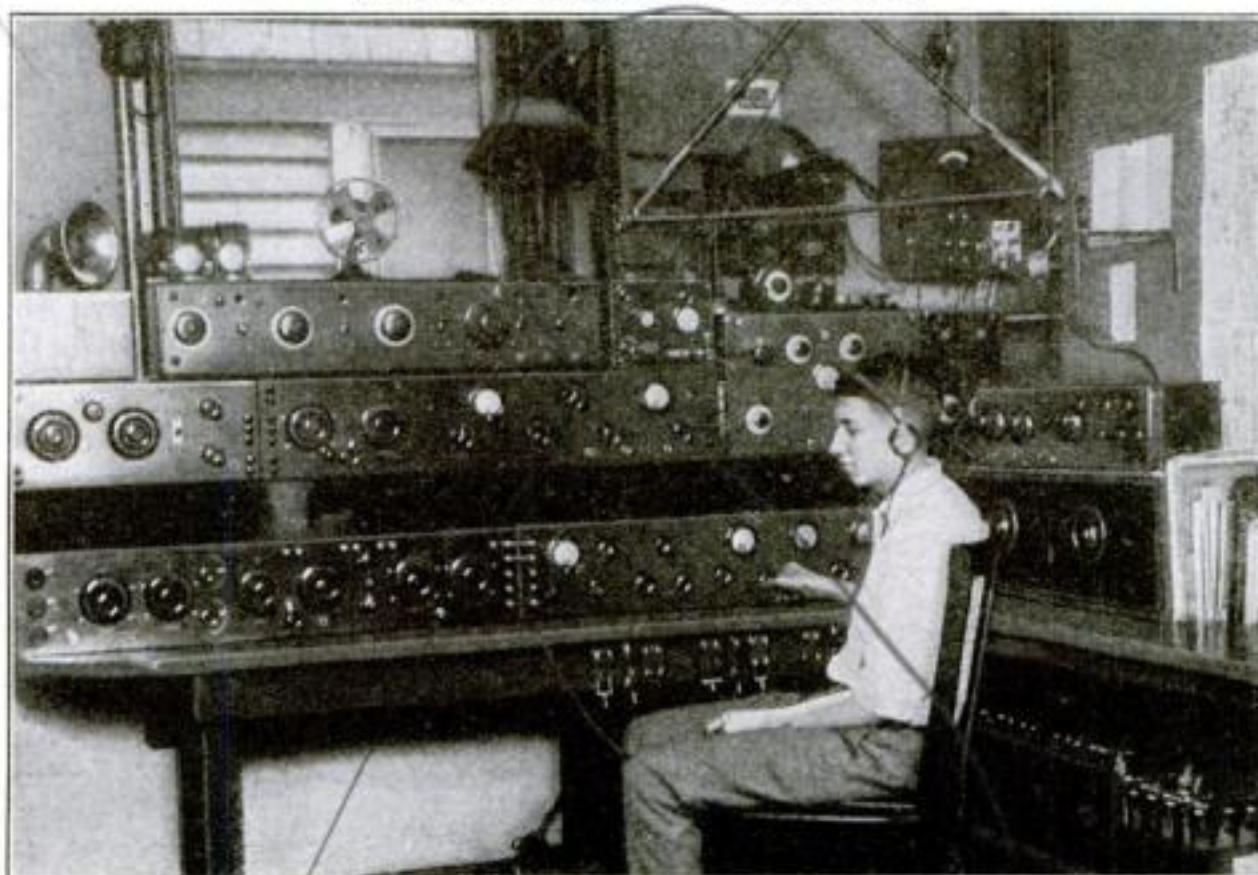

### Fuse Protects the Tubes

It is connected in the minus B battery line and will burn out instantly when the current rises to between 140 and 200 milliamperes, so that if the high-voltage wires in the receiver become crossed with the filament circuits, or the B battery is accidentally connected in place of the A battery, the fuse will burn out and the tube filaments will not be injured at all

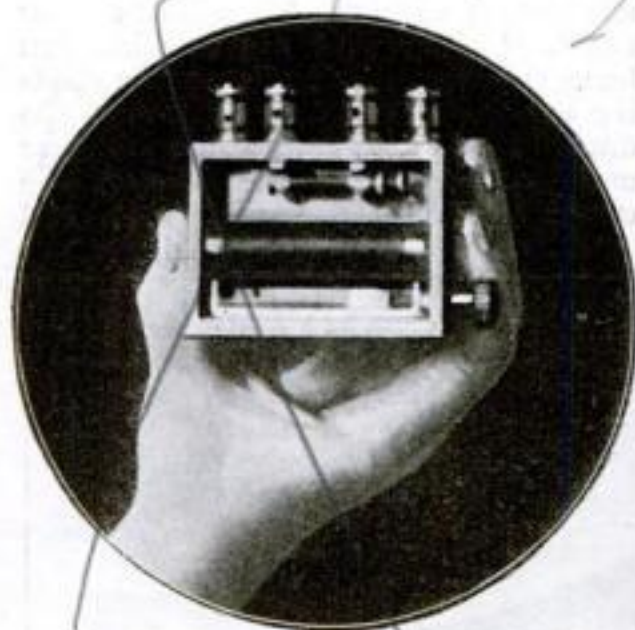


### Radio Set in Vanity Case

Another of the novelty receivers at the Chicago Radio Show was built into a vanity case after the powder puffs, powder compartments, and the other usual fittings were removed. It is a crystal receiver. The tuning inductance is shown at the bottom and the four binding posts at the top are used to connect the set with the antenna, the ground, and the head phones. The picture shows it removed from the case



### The Radio Peddler Appears

In many foreign cities, the peddler's pushcart loaded with an assortment of the cheaper radio parts is a novelty

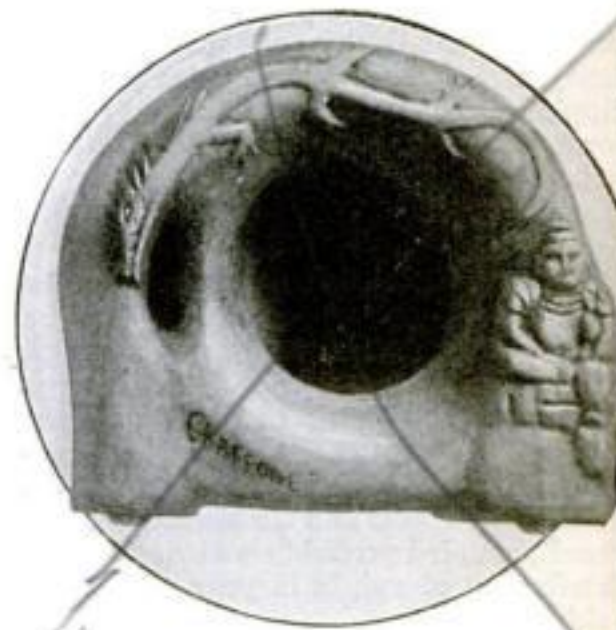

### Loudspeaker like Throat

A loudspeaker that is designed after the human throat and its adjacent passages has just appeared on the market. In addition to the main channel for the sound, there are other passages in the molded composition that the inventor claims add much to the naturalness of reproduction. An artist and a sculptor assisted in working out the final design of the instrument so that an attractive and ornamental loudspeaker is the result




# SKIDDING—How to Avoid It

An automobile expert tells of simple ways to save your car from disaster on treacherous roads

By George Arthur Luers

**A** LIGHT car and a heavy foot make a combination that works well as long as you traverse dry and unobstructed concrete roads.

But when the roads are glazed with ice, when they are wet from snow or rain, when they are freshly oiled, when a light rain has converted the fine dust on old roads into slippery mud, when you at-

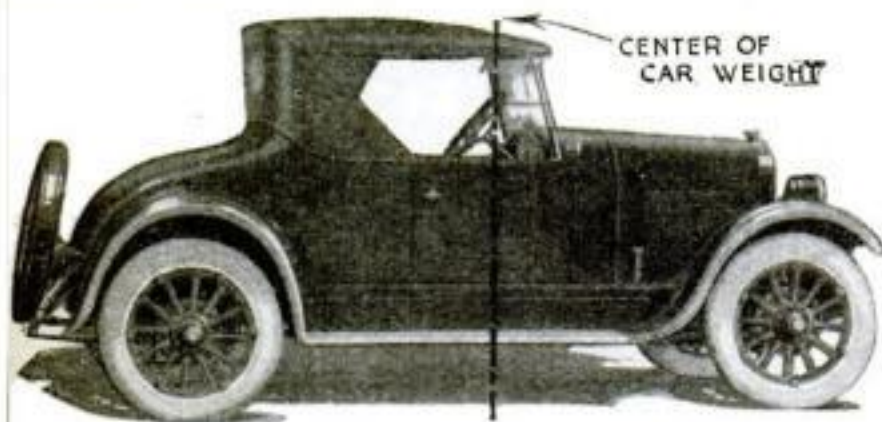

tempt to avoid a stretch of bad going by driving on wet trolley tracks — then this combination is likely to prove dangerous; for it leads to skidding.


In fact, the heavy foot that always presses the accelerator down to the limit and suddenly jams on the brake every time it is necessary to stop, is a dangerous thing to have in any car on any kind of highway.

Unless you are an exceptionally skilful and experienced driver, your first tendency, when you feel the rear of your car slipping sideways into a skid, is to push down hard on both brake and clutch pedals. You want to stop the car as quickly as possible.

roads, for that matter. Then the necessity for making sudden stops—one of the most frequent causes of skidding—will be removed. Also, the skilful driver will control his car speed mainly with the engine, closing the throttle or even shifting into a lower gear and using the throttle to slow down under adverse road conditions. If this does not control the car, it is permissible to apply the brake, without releasing the clutch, which keeps the wheels rolling in a definite direction.

Avoid driving directly

UNEQUAL DISTRIBUTION OF CAR WEIGHT CONTRIBUTES TO SIDE SLIPPING.

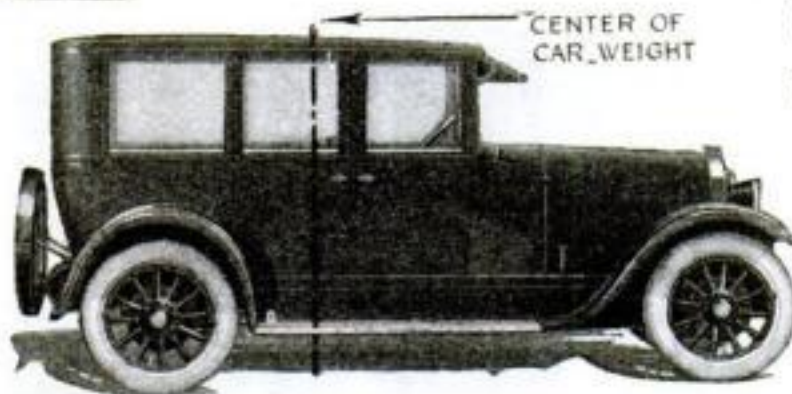

tempt to avoid a stretch of bad going by driving on wet trolley tracks — then this combination is likely to prove dangerous; for it leads to skidding.

THE HEAVIER THE REAR OF THE CAR, THE GREATER THE TENDENCY TO SWING, REQUIRING CAUTIOUS STEERING AND REDUCTION OF SPEED

In fact, the heavy foot that always presses the accelerator down to the limit and suddenly jams on the brake every time it is necessary to stop, is a dangerous thing to have in any car on any kind of highway.

Unless you are an exceptionally skilful and experienced driver, your first tendency, when you feel the rear of your car slipping sideways into a skid, is to push down hard on both brake and clutch pedals. You want to stop the car as quickly as possible.

**A** SKIDDING car, however, can't be stopped with its brakes. When you throw out the clutch and apply the brake, you lock the rear wheels. The wheels cannot rotate, the grip of the tires on the slippery roadway is slight, and the consequent difference in traction between the locked rear wheels and the revolving front wheels, coupled probably with an unequal distribution of weight in your car, causes a skid.

One fact must be appreciated by every owner—that no car has ever skidded without cause and the driver is almost invariably the contributor of the cause.

Underlying many instances of serious skidding is the nervousness of the driver. The terror of the sudden side swing robs the driver of his ready reasoning power, and a movement of the foot or hands brings on the skid with uncontrollable suddenness.

The thing to do is to drive slowly always on slippery roads—on any sort of


halfway round in perfect safety when you are going slowly, whereas at high speed a sixteenth of a revolution of the wheel may invite disaster. The wheel should be held steadily and any suddenness in change of direction avoided. It is not necessary to coast around a turn; in fact, it is better to keep the clutch engaged, closing the throttle to retard the forward movement of the car.

**T**HESE precautions should be sufficient to prevent your skidding in the ordinary conditions of driving. Should the car skid, though, despite all your efforts to be careful, you can right it, or help to right it, by turning the steering wheel in the same direction as that in which the rear end is slipping. It is evident, of course, that this procedure may necessitate steering toward a ditch, when the rear swings in that direction; however, this is a consideration that makes it more necessary to take the curve cautiously at a safe speed.

Skidding at curves applies to both wet and dry road conditions. A straight road, of the crowned, or raised center variety, also can contribute to skidding even in dry weather. Ordinarily in driving along such a road you will straddle the crown instinctively in order to keep the car

to a curve at high speed or abruptly around another vehicle. Instead, learn to reduce your speed with the throttle a considerable distance in advance of the turn, and then make as wide a turn as possible. A good rule to remember is to make the movement of your steering wheel always proportionate to the speed of your car. You can turn the wheel

level. Sometimes, though, it will be necessary for you to turn out to permit another car to pass. Then look out for skidding! Slow down always when you leave the crown, for obviously the slanting car tends to slide over toward the ditch. So slow down, go into low gear until you are back astraddle of the crown again. If necessary, stop, and

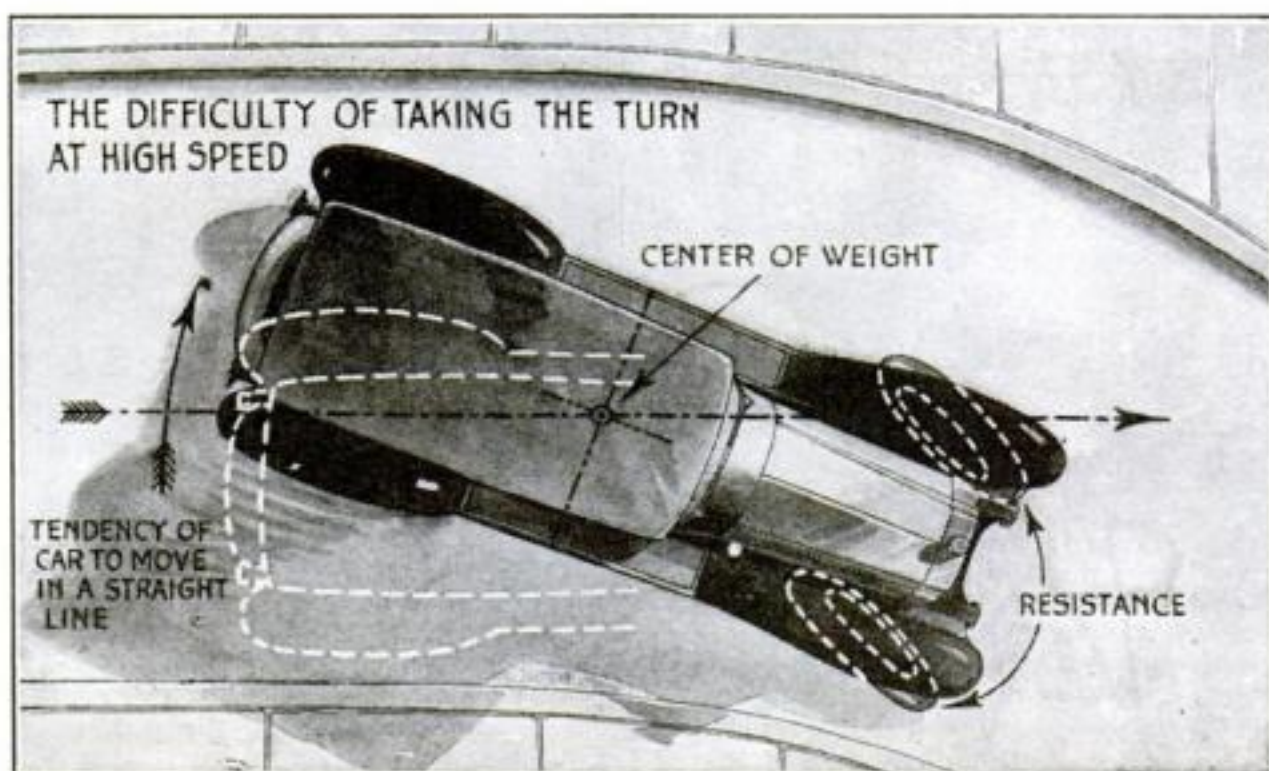

Why a sharp turn of front wheels at high speed will often cause an automobile to skid



then make your way back to the center of the road as cautiously as you can. If the road is of clay, and wet, take even greater precautions than those I have suggested.

Too much weight in the rear of the car contributes much to skidding. Closed cars likewise are more likely to skid, on account of the distribution of the weight, than open models, especially roadsters. If you study the movement of your car along the road, it will be evident that the farther forward and the more evenly distributed the load is, the more responsive the car will be to steering. When the most weight is over the rear wheels, the steering wheels, even though inclined in the desired direction, cannot readily control the weight to the rear of them. With the rear wheels locked and no defined direction of travel maintained by them, the heavy rear weight tends to take control over the front of the car.

**T**HIS condition will be evident, especially when a car is proceeding on the side incline of a wet road. The locked rear wheels are restrained against forward movement, and obviously they cannot slide up toward the crown of the road. There remains but one thing for them to do, and that is to slide down, which they invariably do. The steering or front wheels are not locked and are free to roll forward. The result is that the rear of the car swings around to the front and possibly ditches the car.

It is desirable practice under every condition to carry passengers and equipment well forward in the car. Even spare tires and tools add a desirable forward weight, and the mounting of spare tires on the front fenders or the use of trunks, compartments and storage boxes forward

on the runningboards, is more desirable than having their weight at the rear.

Chains, of course, will lessen the likelihood of skidding. These are applied ordinarily only to the rear wheels, but there are extremely wet conditions under which the front wheels will not hold direction, when it is essential to carry chains on all four wheels.

### POSITION ON CROWNED ROAD WHERE USE OF BRAKE IS DANGEROUS



OVER THE CROWN THE HEAVY REAR OF CAR SEEKS THE DITCH

Balloon tires are credited with having less tendency to skid than others. This is probably true, for tires that are not too heavily inflated or tires that are soft, seem to have better tractive qualities. It is possible the greater area of rubber in contact with the road grips the pebbles and projections, thus holding the car fairly steadily, while the high-pressure tire cuts and slips past all projections. One noticeable advantage of the soft tire is that it resists being turned readily from its path or direction of rolling, thus tending to prevent a skid.

In wet-road driving, the foremost precaution is to avoid that sudden change in direction. Fairly good speed can be maintained on the straightaway, but to make an abrupt turn is always dangerous. Under-inflated or balloon tires, both of which resist or restrain the car in abrupt turning, undoubtedly are safeguards.

With them the road contact also is better, for the softer tires will not bounce off the road, leaving the rear end free to begin swinging.

Speed on turns is the force behind the skid, and the lower the speed the lower will be the force that inclines to skidding. Any abrupt change in direction, regardless of tire equipment or chains, must be at a slow speed, that the forces stored in the car will be controllable and so reduced that the tires can maintain traction.

**I**F YOU are inclined toward nervousness and are inexperienced in driving on wet roads, apply chains to all wheels, keep on the crown of the road, and under no circumstances swing the front wheels rapidly, unless the car is moving at a speed below five miles an hour.

The driver who faces the greatest danger of skidding is the one whose car never has skidded and who therefore remains blissfully ignorant of its hazards. He has experienced none of the feeling of absolute helplessness that comes over the man at the wheel when the car slips out of his control.

I remember that when I first drove a car all roads were alike to me. Whether they were wet, dry, oily, or dusty, it made no difference—I sailed along just the same under all conditions on the straightaway, and took the turns figuratively on one wheel.

Then one day, when the road was slippery after a slight rain and I was driving along a straightaway at about 35 miles an hour, a coal truck suddenly poked its great nose out of a side street and started to cross directly in front of me. I turned the wheel sharply, at the same instant releasing the clutch and stepping hard on the brake—

**I** SHALL always remember vividly the sickening sensation as the wheels of my car refused to obey my hand. We spun around, my car and I, missing the truck on one side, and a telegraph pole on the other—by inches.


In less time than it takes to tell it, I had learned my skidding lesson. From that day I have taken no chances, for I know the possibilities of disaster that lie in slipping wheels.

And so, if you are one whose car never has skidded, take my tip and follow the simple precautions I have mentioned. They may save you from one of the costly accidents that bring tragedy to thousands of motorists each year.

### \$50 in Prizes

**H**AVE you a workbench in your home, and do you like to build useful things?

If so, turn to page 130 of the Home Workshop Department. There you will find the announcement of a prize contest that is sure to interest you.

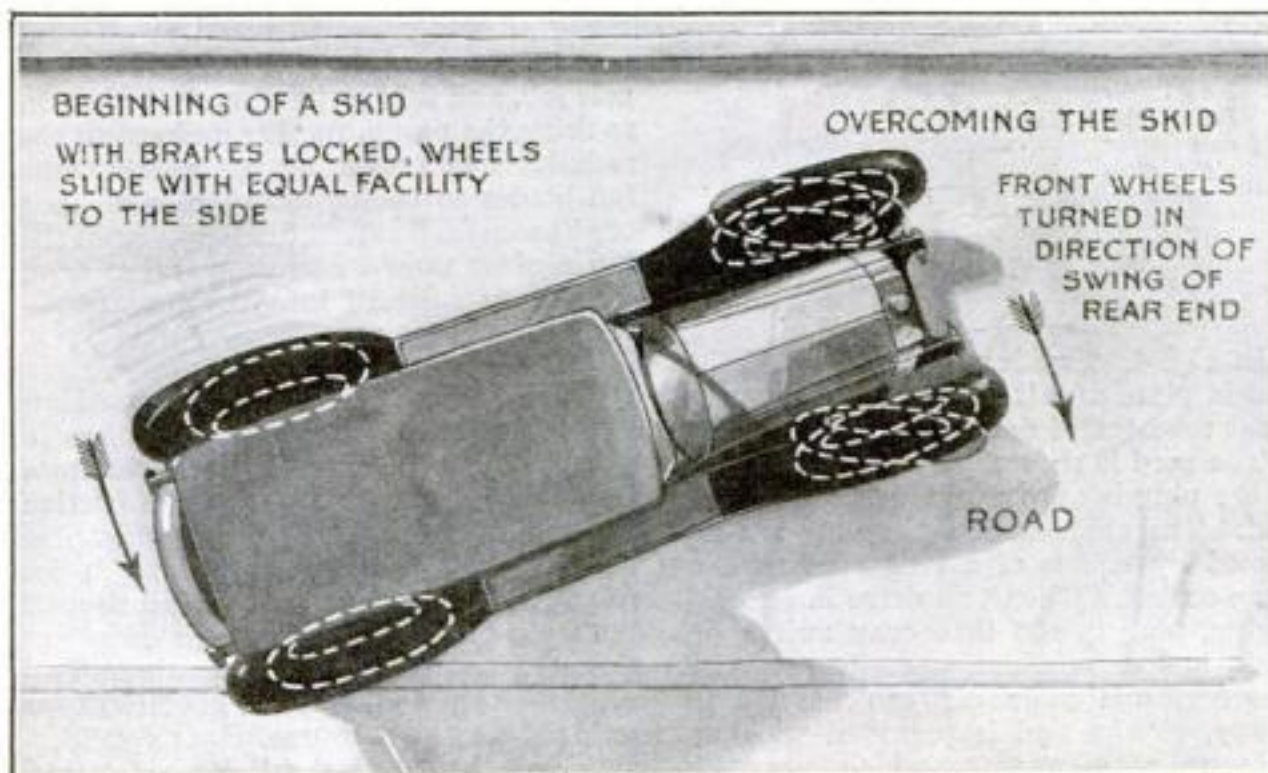

Skidding of the rear wheels can be overcome by turning the front wheels in direction of skid



# Saving Auto-Repair Costs

## What the Car-Owner

**F**INDING it next to impossible to clamp a ball-socket cap in a vise for filing, I made a convenient holder out of two old caps and two bolts, as shown in Fig. 1. The old caps are gripped in the vise and the one to be filed is laid over them. If no vise is at hand, the cap and holder can be rubbed over a file lying flat on the bench.—LAWRENCE TORELL.

**T**O REMOVE or replace a crankcase is a difficult and annoying job for one man. Jacking or blocking up the case helps, but is somewhat awkward and may cause dents in the bottom of the case. A better method is to use a few old springs and two or three lengths of hay baling wire, or wire of equal strength (Fig. 2). On one job, I saved an hour by this means.

If no mud-pan clips are provided, stiff pieces of heavy wire may be bent to the proper shape for attaching the supports and hooked or fastened to the springs or frame. The supports should be of a length to suit the car; the ones I used were 18 in. long.—RICHARD C. TARR.

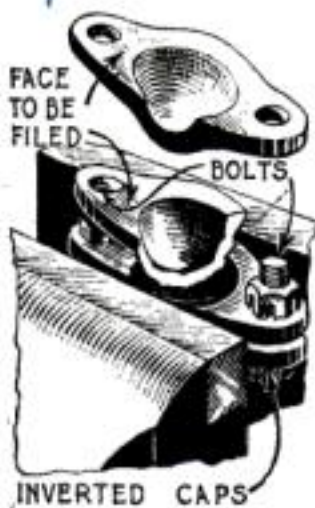


Fig. 1. Filing a ball-socket cap

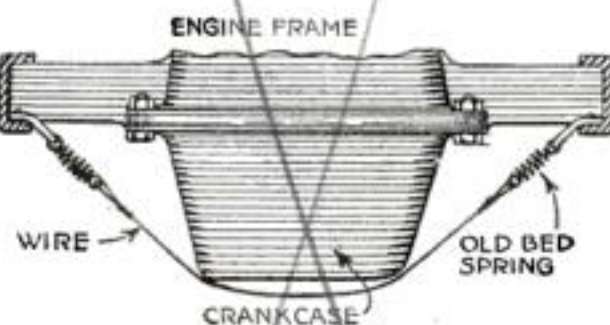
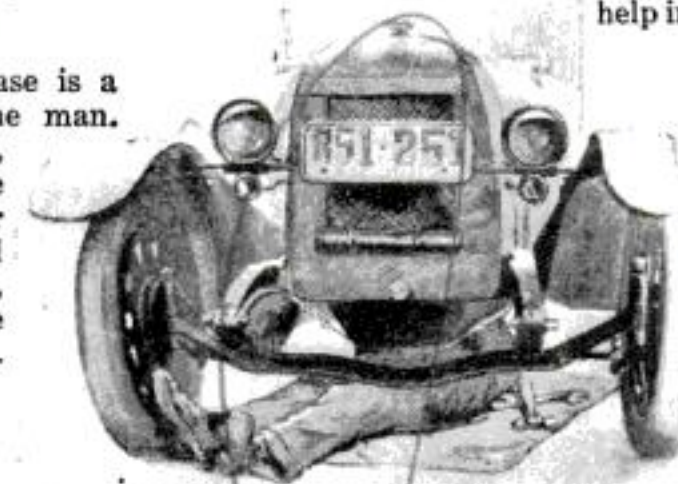


Fig. 2. While replacing the bolts, a crankcase may be supported with wires and springs

**F**OR giving hand signals at night, the devices illustrated in Fig. 6 are excellent. One is a white disk painted on the left gauntlet, another is a polished disk of white metal, and the third is a small ruby lens, all of which reflect the light from any following car.—A. G.

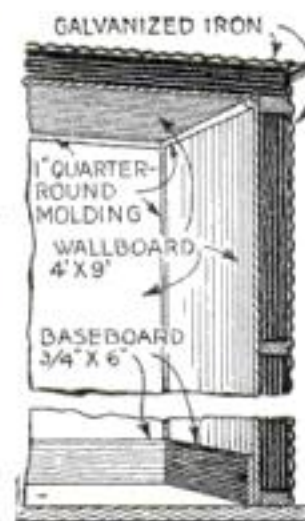


Fig. 3. How metal garage is lined

**T**HE annoying "cracking" and "snapping" of the spokes in wooden car wheels often can be prevented by turning a light spray from the hose on them at intervals to swell the wood. If the trouble is due to drying out of the wood, and not to short spokes or other cause, a permanent cure is made by soaking the wheel in linseed oil, and then painting.

**W**HILE on the road, the key driving the fan on my light car loosened up enough to allow the fan to slip forward and damage the radiator by constant rubbing. As no one was dressed for a greasy re-

pair job, and the fan belt had to be left on to drive the pump, further damage to the radiator was prevented by twisting the fan blades to the opposite angle so that the "propeller" action tended to keep the fan against the rear bearing rather than to draw it forward into the radiator.—HAROLD E. BENSON.

**A** RUSTY rim is apt to cause slow leaks in an inner tube, unless a "liner" is used. I find a good substitute for a regulation liner is a layer of friction tape wound on the rim. The turns of tape should be overlapped about  $\frac{1}{4}$  in. so as to form a continuous band around the rim, except where a hole is cut through the tape for the tire valve. Two rolls of electrician's tape are sufficient for four rims and, of course, costs considerably less than ordinary liners.—DONALD H. PALMETER.

**O**WNERS of corrugated sheet-metal garages often find that the cold penetrates them to such an extent that it is difficult to start the automobile on winter mornings. In the summer, too, these garages are apt to become very hot, to the detriment of the car's finish, as well as the tires, upholstery, and top.

One construction company, which carefully studied these objections to the otherwise economical, durable, and serviceable metal garage, has developed several types of inside sheathing.

Any handy man, however, can line his garage with easily and cheaply obtainable wallboard. It comes in large sheets and is nailed directly to the studding, as shown in Fig. 3. The corners are finished with quarter-round molding and a baseboard is nailed around the bottom. The cost often can be kept within \$15.—GEORGE A. LUERS.

**W**HEN a garage is wired for electricity, it is a simple matter to wrap a heating pad around the lower hose connection, running from the water jacket of the engine to the bottom of the radiator,

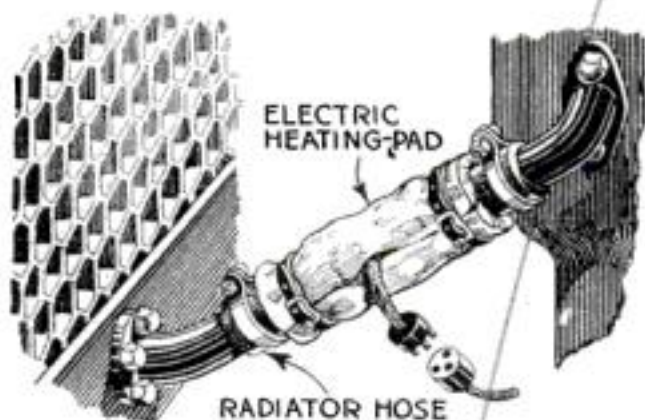


Fig. 4. Heating pad prevents radiator from freezing

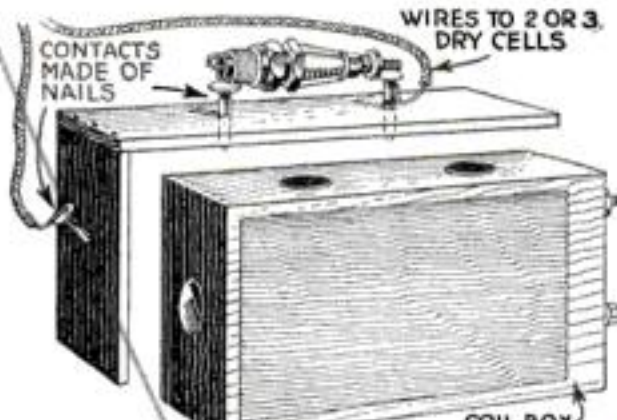


Fig. 5. Simple testing board for auto coil and spark plugs

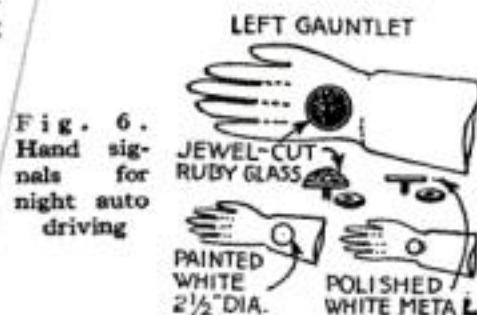


Fig. 6. Hand signals for night auto driving

as in Fig. 4. Two leather straps hold the pad in place and it may be covered with sheet asbestos, if desired.

The cord is shortened so that one half of the plug is only a few inches from the pad. The other half of the plug is connected by means of a long cord with a lamp socket. When you drive in cold nights, plug in the three-way switch on high, low or medium, according to the weather, and your car can be left in safety, as the pad is provided with an automatic thermostat, which prevents overheating.—F. S. ROOT.





# The Home Workshop

Arthur Wakeling, Editor

## How You Can Build a Snow Igloo

Imitating the Eskimo in Novel Sport for Snowdrift Days


**W**ITH his right arm afire like a torch, an Eskimo boy burst screaming from a snow igloo. Lieut.-Comm. Green, U.S.N., busy with dog harness near by, seized the pain-crazed lad, smothered the flames, and doctored the burns so skilfully that they healed. In gratitude, the boy's father asked how he could repay so great a debt, for an Eskimo with a crippled hand is doomed to the endless torture of unescapable frostbite. "Show me how to build a snow igloo," was the reply. As a result Commander Green is one of the few white men, if not the only one, who can build an igloo as well and quickly as the most expert of the Eskimos. It is merely a matter of knowing a few simple tricks and these he has described in the following article.

By Fitzhugh Green

Cut a rectangle about 2 by 3 ft., slanting a bit toward the bottom. On the edge toward you, gouge out a trough 1 ft. wide and from 6 to 10 in. deep. This trough enables you to slide the knife blade back

132, place the last two blocks up-ended at the front right-hand corner. This gives you a starting slope for your spiral when you cut away a triangle as indicated by the dotted line. Start the succeeding row with a full block lengthwise. As you near the back wall, begin to slope the blocks slightly inward.

It is very important that edges be well fitted. An Eskimo does this by shaping his block as neatly as possible before lifting it into place. He then lays it gently on the underneath wall and slides it slowly against the preceding block. Holding it with his left hand he works his knife back and forth between its edges and those adjoining. Gradually it sinks into place. The soft snow

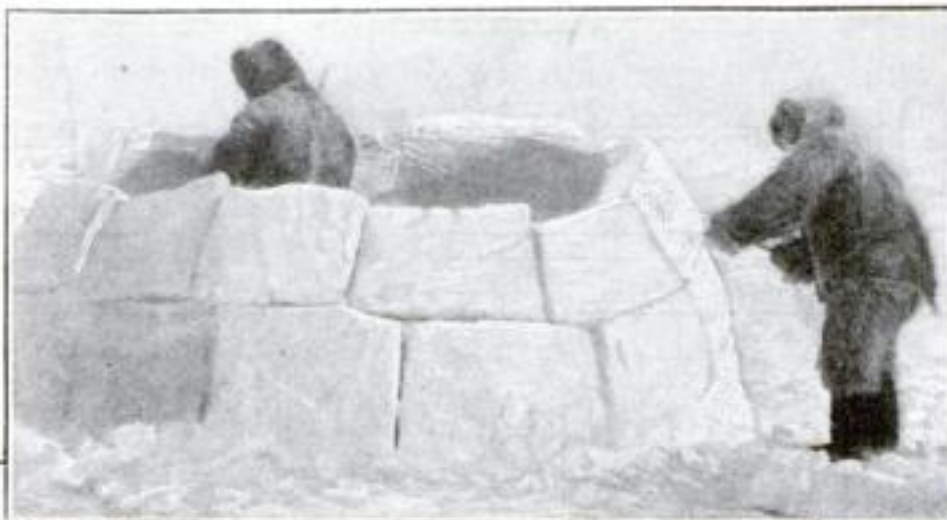


Photos courtesy American Museum of Natural History  
Building the walls with blocks of snow joined closely and later welded by heat



Careful fitting of the keystone block insures a self-supporting, blizzard-proof roof

and forth under the block your vertical cuts have outlined. Dislodge the block by a gentle kick or two in the horizontal crack. The other 50 blocks are easily cut, working from this space.

With your heel mark an ellipse 8 by 10 ft. on a smooth packed surface, sloping slightly, if possible, in the direction you wish your igloo to face. Lay a ring of blocks lengthwise, edge to edge, on this outline. As shown in the sketch on page

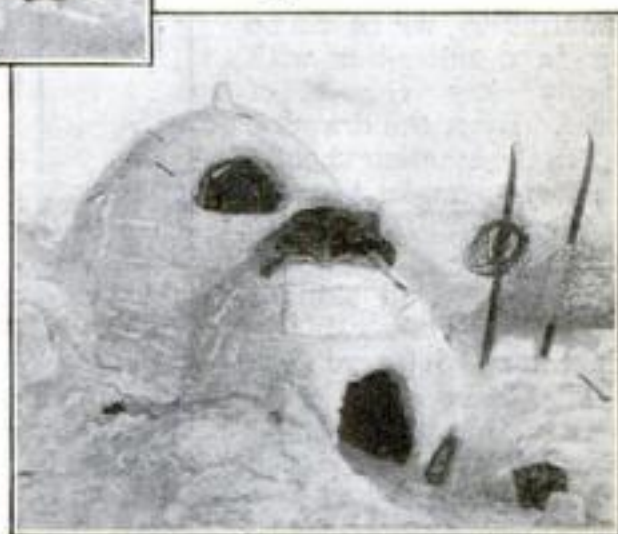

A completed igloo with ice window and vestibule for sheltering dogs and footgear

**A** SNOW igloo in some ways is the most remarkable dwelling constructed by man.

An igloo for 10 people can be built in 45 minutes. No tool is required except a long knife; no material save snow. Once finished, it will support three men on its roof. A cyclone could not demolish it. It is air- and water-tight, sound- and tempest-proof. It is warm, dry, light, durable, well ventilated, and clean. Its door has weather strips, but no hinges. Its window is transparent, but unbreakable. Its floor is marble-white and hard, yet can be replaced in 10 minutes.

Properly initiated into the mystery, any man can build an igloo the first time.

It is important to select proper snow. Find a drift packed hard by the wind. Test it by pushing your butcher knife into it. If the snow yields grudgingly, it will make good blocks.

### What the Mechanical Departments Offer You

**PAGES 93 to 133**—The Home Workshop, with 34 articles telling how to make furniture, toys, household conveniences, and novelties—a handbook for amateur mechanics—illustrated with 38 drawings and 26 photographs.

**Pages 134 and 135**—Shipshape Home Department.

**Pages 98 and 136 to 146**—The Better Shop Methods Department packed with time- and money-saving suggestions for the professional mechanic—17 illustrations.

**Special Handicraft Contest Announcement on page 130.**

powder loosened by his knife becomes, in effect, a mortar. Finally, with a thump of his knife hand, he drives the block firmly and tightly into its resting place.

Success with an igloo centers in the arch. And success is easy if one remembers the principle involved—that any domed structure is self-sustaining when its parts permit distribution of stress throughout the whole.

No snow block must be laid at an angle that puts its face out of line with the curving spherical surface of which it is an element when the igloo is complete. A few trials will show that as the spiral rises the walls may be sloped more and more sharply inward. Block faces in all cases above the first tier or two are beveled as the cover edges of a hallowe'en pumpkin or a pineapple cheese are beveled. This

(Continued on page 132)



# Beautiful Salem Chest Easily Made

## Has no Difficult Joints to Puzzle the Beginner in Woodwork

**I**F YOU are a relative beginner in woodwork and wish to astonish your family and friends by building a piece of furniture that will appear to be the work of an experienced craftsman, you cannot find a better project than the attractive Salem chest of drawers illustrated at the right.

Incidentally, few pieces of furniture are more appreciated. In almost every home there is room for another chest of drawers, and just now the low type, developed so beautifully by Colonial cabinetmakers, is becoming exceedingly popular.

From the standpoint of construction, this piece is entirely unique. It is safe to say that never was designed a chest of drawers so distinguished for beauty and refinement of proportions and at the same time so simplified that it does not require the making of a single difficult cabinetmaker's joint.

There is not a mortised and tenoned, a dovetailed, a tongued-and-grooved, or even a rabbeted joint in the whole piece. Most of the parts are put together with butt joints, such as are used in common boxes. A few of the joints are plain miters, which can be cut in a miter-box with hardly any chance of error. Even the drawers, which the amateur usually dislikes to make because of the careful fitting that is required, do not call for any especial skill or knowledge of cabinet-making and joinery.

The main essential in constructing this chest of drawers is to study the drawings and bill of materials given later on until you have obtained a clear idea of the relation of the parts. Then buy a sufficient number of boards to make the chest. What you get will depend somewhat upon what your lumber dealer has in stock, but he will be glad to help you select stock that will cut to best advantage. Then cut all the main pieces to the correct dimensions as accurately as possible.

You will find that it is a simple matter to assemble the pieces. It is just like building a house of blocks, because the parts go together naturally. What little fitting becomes necessary as the work

A Salem chest of drawers to grace any bedroom




progresses, will be child's play in comparison to the work usually entailed in making a piece of furniture.

The exact size of each piece necessary in building this chest is given in the following bill of materials. Each item is lettered to correspond with the accompanying drawings. The dimensions are given in inches. The woodwork can be made of mahogany, gumwood, or any cabinet hard wood you prefer to use, except where otherwise noted.

A Top of case,  $\frac{3}{8}$  by 22 by 42, either solid hard wood or plywood, 1 required.

(Continued on page 123)

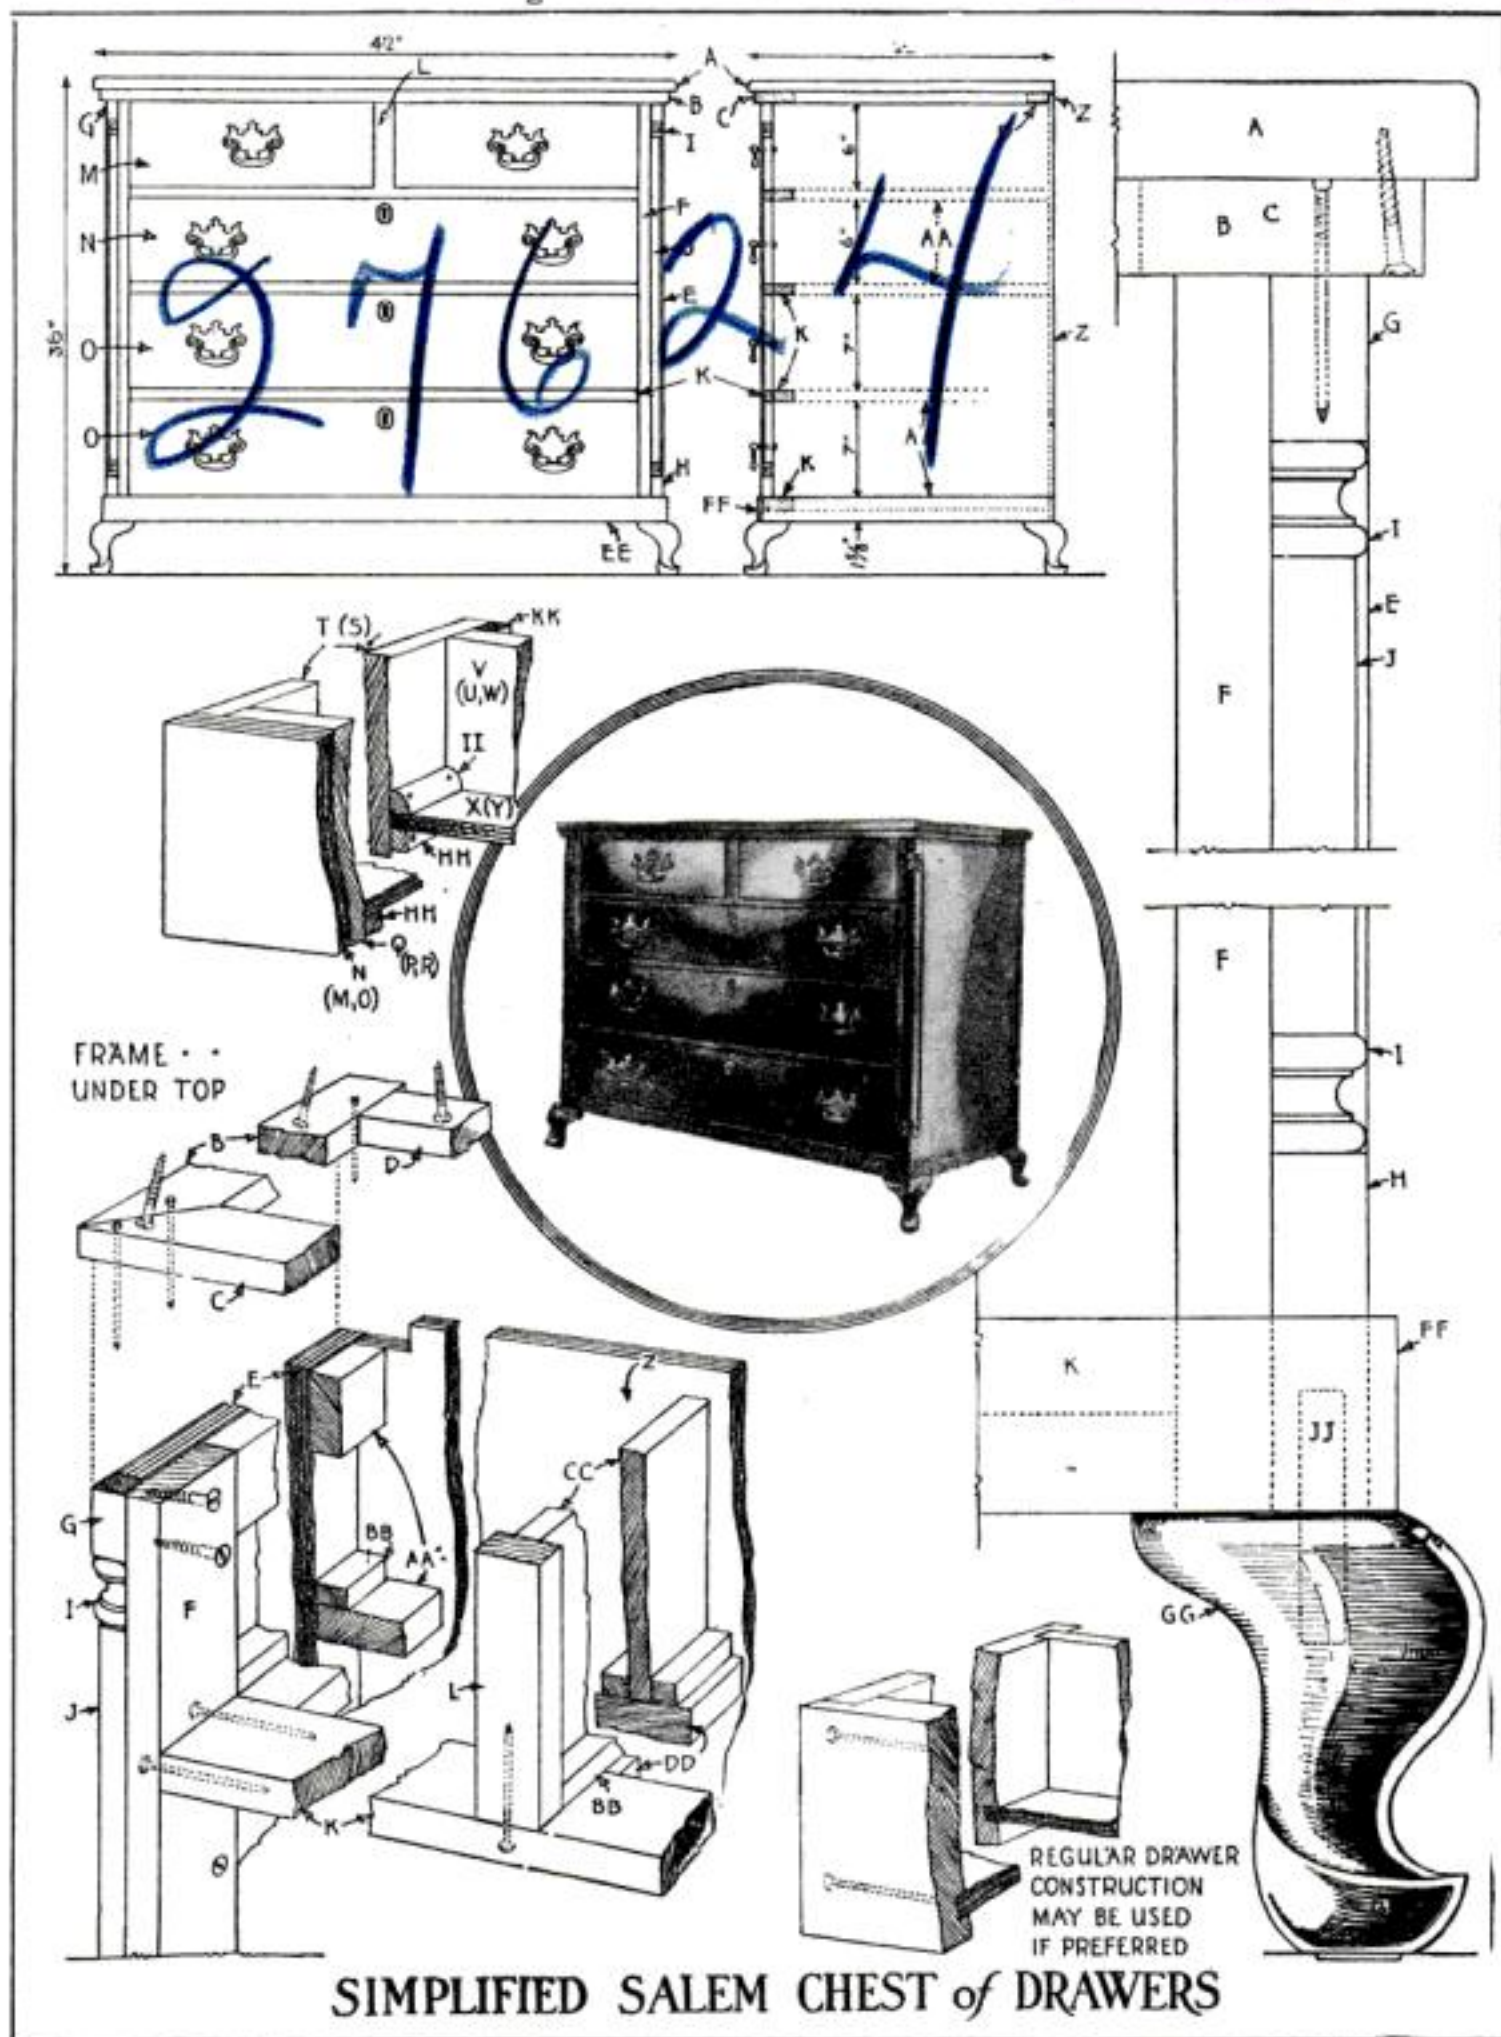



**FREE**

# This Beautiful 25c Book on Wood Finishing



Our book gives complete instructions for finishing all wood—hard or soft—old or new. Tells how inexpensive soft woods may be finished so they are as beautiful and artistic as hard wood. Explains just what materials to use and how to apply them. This book is the work of experts—illustrated in color—gives covering capacities—includes color charts, etc. Use coupon below for a FREE copy.

## JOHNSON'S WOOD DYE (Penetrating)

Johnson's Wood Dye is very easy to apply. It dries in four hours and will not rub off or smudge—penetrates deeply, bringing out the beauty of the grain. Johnson's Wood Dye is made in 17 popular shades as follows:

No. 128 Light Mahogany	No. 125 Mission Oak
No. 129 Dark Mahogany	No. 130 Weathered Oak
No. 127 Brown Mahogany	No. 110 Bog Oak
No. 329 Red Mahogany	No. 172 Flemish Oak
No. 120 Fumed Oak	No. 178 Brown Flemish
No. 123 Dark Oak	No. 131 Walnut
No. 126 Light Oak	No. 140 Early English
No. 124 Golden Oak	No. 180 Gray
No. 160 Brown Oak	

All shades may be easily lightened, darkened or inter-mixed. Full directions on every label. Select the shade of Dye you want from the list above and order it from your dealer by name and number.

**S. C. JOHNSON & SON, Racine, Wis., U. S. A.**  
"The Wood Finishing Authorities"

Johnson's Wood Dye is a dye in every sense of the word. It contains no finish whatsoever. Like most first class products it answers one purpose only—it dyes the wood—the finish must be applied over it. We recommend Johnson's Varnishes or Johnson's Polishing Wax.

Ask for a FREE copy of the Johnson Book at the Best Paint or Hardware Store in your locality. Stores displaying the Johnson Service Department Sign shown below can furnish the Book and full information on how to finish wood the proper way. Or, use coupon below.

	<b>S. C. JOHNSON &amp; SON, Dept. P.S. 2, RACINE, WIS.</b> <b>"The Wood Finishing Authorities"</b> (Canadian Factory—Brantford)
	Please send me free your 25c Instruction Book on Home Beautifying and Wood Finishing. I enclose 10c to cover postage and wrapping.
	MY DEALER IS.....
	My Name.....
	Address..... City and State.....



# Making Removable Seat Cushions

## Easy Ways to Do Your Own House and Auto Upholstering

By William T. Weld

Shopwork Instructor,  
Central High School, Peoria, Ill.

A COMFORTABLE seat with a good cushion is a combination not always encountered. Office workers, draftsmen, motormen, and many others sit on hard stools that would be much less fatiguing if provided with cushions.

It is not always possible, however, to get a cushion that will fit the chair or stool you use. In that case you can make one yourself.

First determine the size, the kind of material you want for a cover, and the kind of stuffing with which to fill it. Figure 1 shows how a pattern is laid out for a cushion  $1\frac{1}{4}$  in. thick and 12 in. square. From this plan you can modify the dimensions to suit your own requirements.

For a cushion that is to have hard and continuous service, a cover of heavy material, such as canvas or artificial leather, should be used, while for porch swings, lawn seats, cedar chests, and the like, a good grade of cretonne will serve.

Curled hair, while the best material for stuffing, is rather expensive, so kapok, cotton or Spanish moss can be used. Moss makes a light cushion, is inexpensive and does not pack down readily from continued use.

To determine the total length of the material needed, add twice the desired length and twice the desired thickness to the sum of the figures representing the amount of material needed for folding in the seams, usually  $2\frac{3}{4}$  in. To determine the total width of the material needed, add twice the desired thickness plus the width to the sum of the figures representing the folded material, which in this direction will be  $2\frac{1}{4}$  in.

AFTER you have your material cut to these over-all dimensions, start from the left edge, B, Fig. 1, and measure over as indicated until the right edge, B, is reached. A pin may be inserted for reference on each line as it is measured off. Make all your measurements accurately and be sure that all corners are laid off square.

The same procedure is done from edges C to A. Then cut with a pair of scissors or a sharp knife on all the lines indicated by the heavy lines of the drawing.

You are now ready for the stitching. The use of a sewing machine makes a neater job, but with a little care and patience a good cushion may be made by hand.

Figure 5 shows how a section of this type of cushion


will look. As shown at D in Fig. 1 and in Fig. 5, the lower loops or seams are sewed permanently, after being folded properly,



No one knows better than Mr. Weld the tricks of doing simple upholstery and chair seating. His next articles will tell how to reupholster chairs and repair upholstery of various kinds.




Tying on a button with a tufting knot (above) and (below) sewing up the stuffing opening

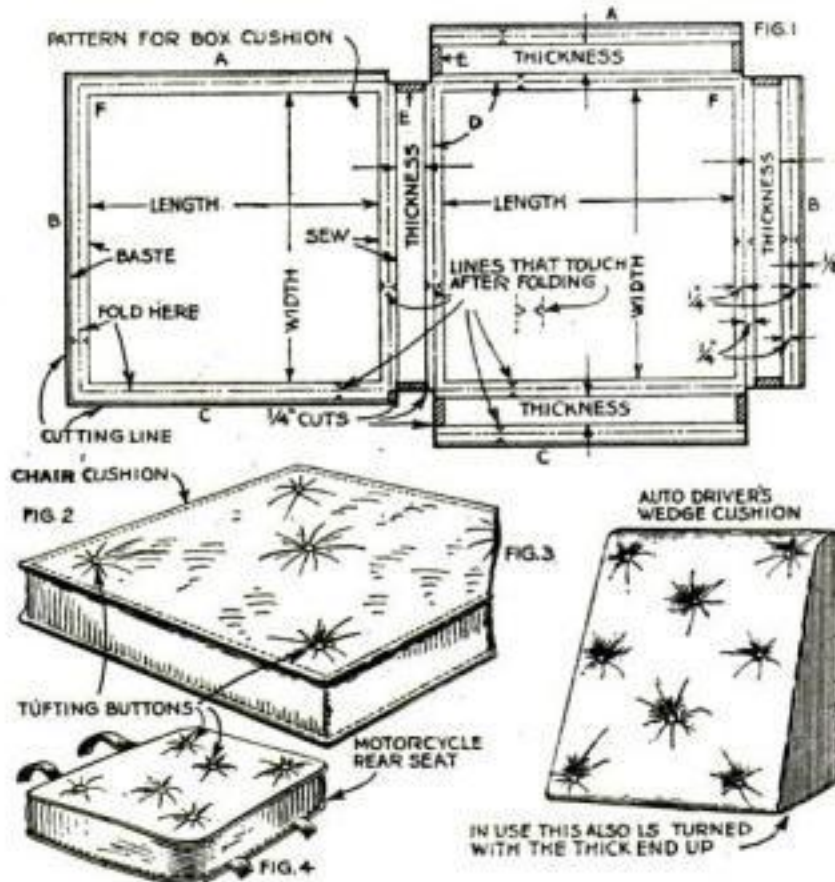

Pattern for a straight side or box cushion, a removable chair cushion, and motorcycle and auto cushions



Two methods of making the seams

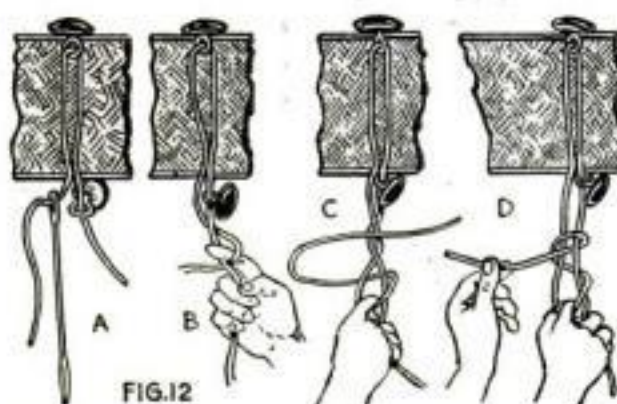

Steps in tying an upholsterer's tufting knot

while the seams at A, B, and C are first basted or pinned temporarily in the proper position. The purpose of this folding is to conceal the raw edges of the material and to make a finished edge that will wear well. The loop formed also serves to hold welting cord in place if you desire to use it (Fig. 6).

The seams marked D are first sewed, then the vertical sides are folded up and the flaps E turned in together, and the corners are stitched from the inside. Next, fold the upper surface (C, B, A) into place, which will take a position so that one F will be directly over the other F, thus really forming a cloth lid to the box cushion you are making.

Proceed to stitch this into place, as shown in Fig. 5, and continue around three sides and about two-thirds of the way along the fourth side. The stuffing then is put through this opening, after which it is sewed up.

This method of making a box cushion has the advantage of keeping your material all in one piece and that all of the stitching, with the exception of the vertical corners, is done from the outside.


Figure 8 shows a method used by upholsterers. In this the welting cord is covered first by a narrow strip basted in place, and then stitched between one vertical edge and one surface. These are held together as shown and stitched from the wrong side of your material. This is done at all seams, an opening being left for the purpose of putting in stuffing; then the whole cushion is turned right side out. An edge seam of this type appears as shown in Fig. 9.

FIGURE 10 shows a simpler method, with the cord omitted. The top and bottom pieces are cut to proper size, the vertical edge is cut in one long strip of the proper width and length and sewed together at the end. The edges of adjacent and corresponding surfaces are then placed as shown in Fig. 10 and stitched about  $\frac{1}{4}$  in. from the raw edge. This is done all the way around on both the top and bottom surfaces. The cover then is turned right side out, as explained before. Figure 11 shows how this seam looks when finished and turned.

The stuffing is pushed through the opening left at one edge. Take a small amount each time and work it well into all the corners with a long narrow stick or by putting your arm through the opening and using your fingers.

Fill the cushion until the center is about twice as thick as you really want it. You are then ready to tie

(Continued on page 122)



Details of seams and tufting





# CELORON

## BAKELITE RADIO PANEL

Size 7 x 12

MANUFACTURED BY  
**DIAMOND STATE FIBRE COMPANY**  
BRIDGEPORT (Near Philadelphia) PENNSYLVANIA, U. S. A.

MAKERS OF  
**CELORON-Diamond-Fibre-VULCAWOOD**  
Offices in Principal Cities  
IN CANADA: DIAMOND STATE FIBRE COMPANY, OF CANADA, LTD., TORONTO, CAN.  
Made and Printed in U. S. A.

**How to Work and Finish Celoron Bakelite Panels**

**D**RAW full size layout of the holes to be drilled on a sheet of heavy paper, cut to exact size of panel. Transfer centers of holes through the paper to the Celoron panel with a pointed instrument.

The drilling can be done with a carpenter's brace or a hand drill, but metal-cutting twist drills should be used, not ordinary wood bits. Begin to drill from the front side of the panel. To avoid chipping on back, clamp panel to a board or work bench. Counter-sink holes with a larger size drill. Holes can be threaded with standard machine taps.

If a dull or mat finish is desired rub down the panel with No. 00 sandpaper. The sandpaper should be wrapped around a wooden block and the rubbing all done in one direction, not with a circular motion.

Wipe off the panel with an oiled cloth.

## As popular as radio itself

**A**S more and more radio novices become seasoned fans, the popularity of Celoron Panels multiplies.

Today Celoron is the accepted standard for radio panels. Sets of many foremost makes are equipped with Celoron panels and parts.

Celoron does not chip or crack. It does not soften, warp or buckle. It is infusible and will stand up under atmospheric changes.

Look for Celoron Panels where you buy your radio supplies. Insist on Celoron insulation in the parts you buy.

Celoron is also made into tubing that has all the insulating qualities of sheet Celoron. It is used extensively by manufacturers of the best radio instruments. It is made in all sizes.

**DIAMOND STATE FIBRE COMPANY**  
Bridgeport, Pa., and Chicago, Ill.

*The oldest and largest manufacturer of vulcanized hard fibre and laminated technical materials in the world.*

*Wherever you see a factory chimney, there are countless electrical and mechanical uses for Celoron and Diamond Fibre.*



*Celoron tubing holds its shape. It is made in standard lengths and diameters—all accurately cut to size.*



*This rack on a merchant's counter means that he wants to give you the best in radio parts.*



# Better Shop Methods

How Expert Mechanics Save Time and Labor



## Secrets of Success in Grinding

What Every Machinist Should Know about Abrasives



H. L. Wheeler

**T**HE art of finishing metal surfaces by grinding is a branch of metal working with which you should be familiar if you are connected in any way with machine-shop work.

While grinding has been in use almost as long as the practice of hardening of metals and tools, and probably was first used in connection with the reduction of metal that had been hardened, such as axes, tools, and machine parts requiring to be finished after hardening, the practice has grown enormously. Today machine parts of various metals, whether hard or soft, are finished by the grinding process.

The finish produced by grinding is a superior one. The grinder is in a class by itself, when compared with the lathe, milling machine, shaper, or planer. For rapid production of finished surfaces, the grinder cannot be excelled by any other machine. And so it is that the grinder is becoming a real factor in machine-shop practice.

The amount of metal removed by grinding is, of course, small. The advantage lies in the fact that very little pressure is required to remove the metal. The liability of distorting the finished

By H. L. Wheeler  
Machine-Shop Foreman

lasting finish. A good grinding-machine operator acquires the ability to do first-class work only through several years' experience with the various kinds of grinding machines. And in many cases

knew just how to "baby" it to turn out a good roll. As he was a man well along in years, several attempts had been made to break in new men, but they all gave it up in disgust. This was, of course, an exceptional case.

As this is the day of specialists in the machine business, there are specialists in grinding—men who make it their life work. And with constant practice they get to know all about speeds and feeds, grind-wheels, and all the ins and outs of the grinding business. But almost every machinist is called upon occasionally to tackle grinding jobs. If his knowledge is well founded, he need not feel nervous about going ahead.

Perhaps the most puzzling problem is the selection of the proper wheel for the job in hand. Wheels are made in many grades, sizes, and shapes. The grade or grit is designated by a letter or number, with reference to size of the grit of which the wheel is composed and the hardness or softness of the bond that holds the grit in place.

The particles of grit represent many thousands of cutting points. A grinding machine that is equipped with the right wheel for the work

in hand and working under normal conditions will remove a given amount of metal more rapidly than any other process.

The manufacturers of grinding wheels are experimenting constantly to improve

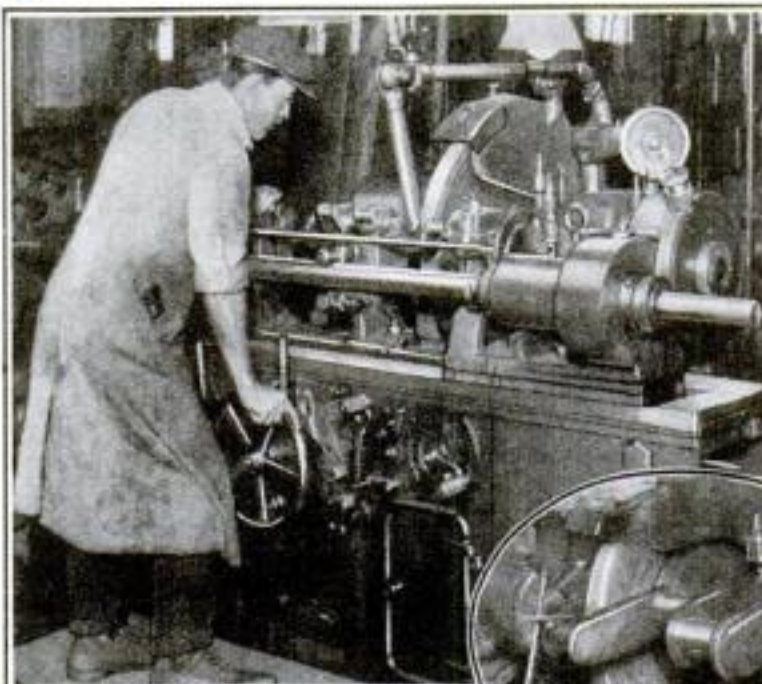


Fig. 1. A heat-treated nickel steel crankshaft on a grinder

the man must be "acquainted" with the machine. Grinding machines develop certain peculiarities that often result in spoiled work until the operator has learned all of the little weaknesses inherent in the machine, if it be an old one, or the stiffness that is often noticeable in a new machine.

I remember a job of grinding rolls for paper machines in a shop I was connected with a few years ago. The machine was designed for this particular job, but had been in service many years and was badly worn. There was just one man in the shop who could turn out satisfactory work on the machine. He had become so accustomed to the old grinder that he

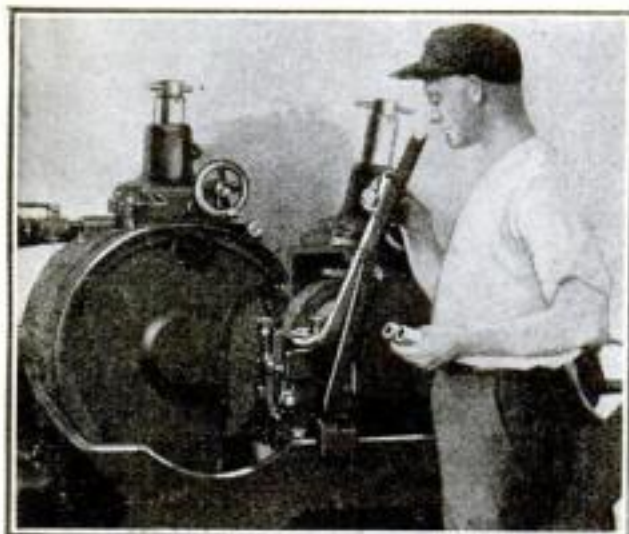


Fig. 2. Feeding bushings into a new centerless grinder. The work passes between two wheels

piece is thus reduced to a minimum.

This is well demonstrated in finishing a very long shaft by the grinding method and finishing a similar shaft by turning in a lathe. Careful inspection of the two shafts will reveal the fact that the ground shaft is straighter and more uniform in diameter, and has a brighter and more

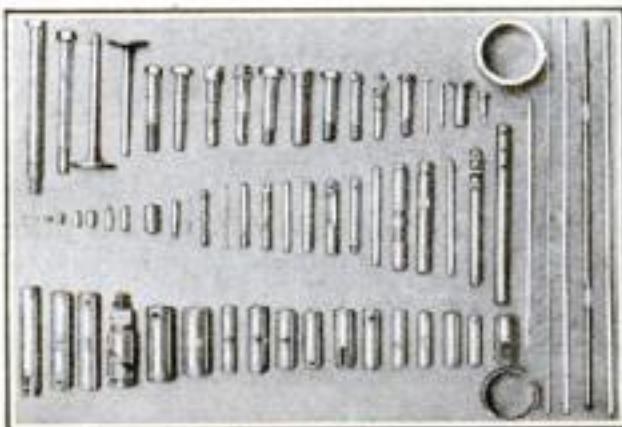


Fig. 3. Samples of the work done by the recently developed method of centerless grinding

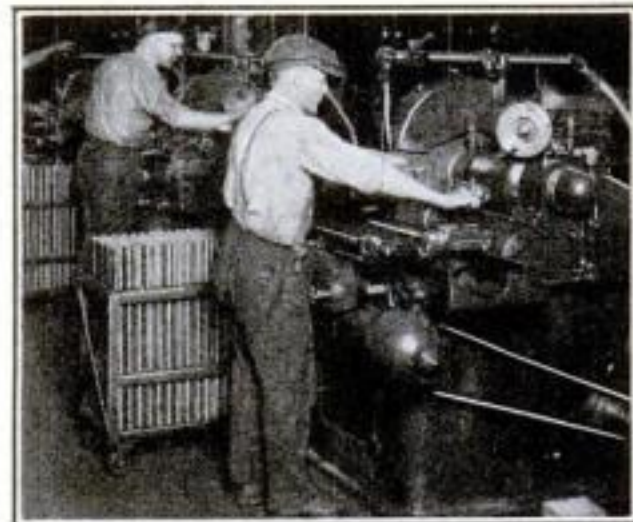


Fig. 4. A modern hydraulic traverse grinding machine used for finishing long work

their product and are discovering new and better ways to grind. Careful records are kept of each experiment and

(Continued on page 140)

**D**ON'T fail to turn to pages 136-146, where you will find the continuation of the Better Shop Methods Department.





# Starrett

## Fine Precision Tools—2200 from One

In something over forty years the Starrett Line has increased from a single tool, the famous Combination Square, to include over 2200 different Precision Tools, Hacksaws and Steel Tapes. Those years have seen the growth of a business that now requires the largest plant in the world devoted exclusively to the manufacture of fine mechanical tools.

From the first mechanics to whom Mr. L. S. Starrett sold his Improved Squares and Rules, the roll call of Starrett Users has grown year by year until today every country in the world which uses machinery and precision tools knows Starrett as the standard of accuracy.


What is the cause of this world-wide preference for the Precision Tools that are made in Athol, Massachusetts? If you use Starrett Tools you know.

Shown in the group at the right are the following popular Starrett Tools: Micrometer Depth Gage No. 440, Improved Firm-Joint Calipers, No. 26, Fay Spring Dividers, No. 77, Quick Reading Steel Tape, No. 510 (with Leather Case and Patented Push Button Handle Opener), Micrometer No. 224 A (with interchangeable Anvils giving range of 2" to 6"), Combination Square No. 11, and Thickness Gage No. 72. Write for Catalog No. 23 "W" for description of the complete Starrett Line.

**THE L. S. STARRETT CO.**

*World's Greatest Toolmakers*  
Manufacturers of Hacksaws Unexcelled  
**ATHOL, MASS.**


*Why are  
Starrett Tools  
Standard  
in every Shop*

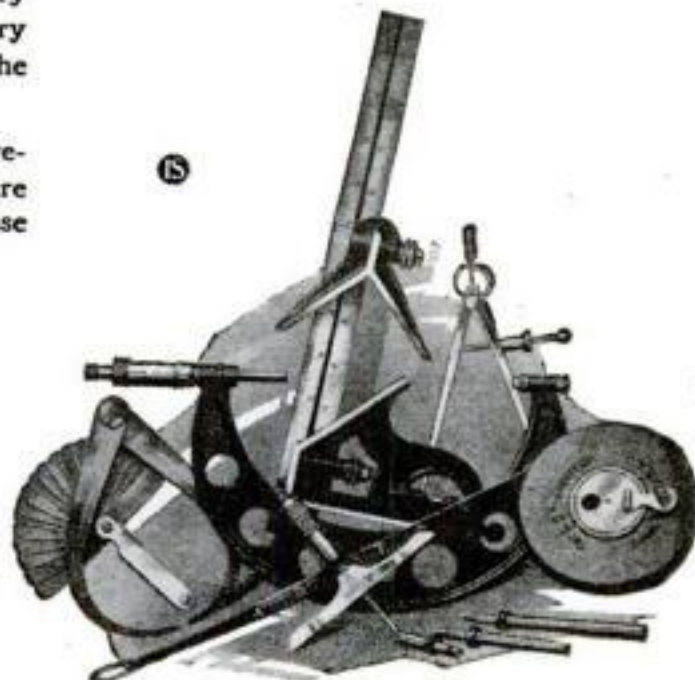







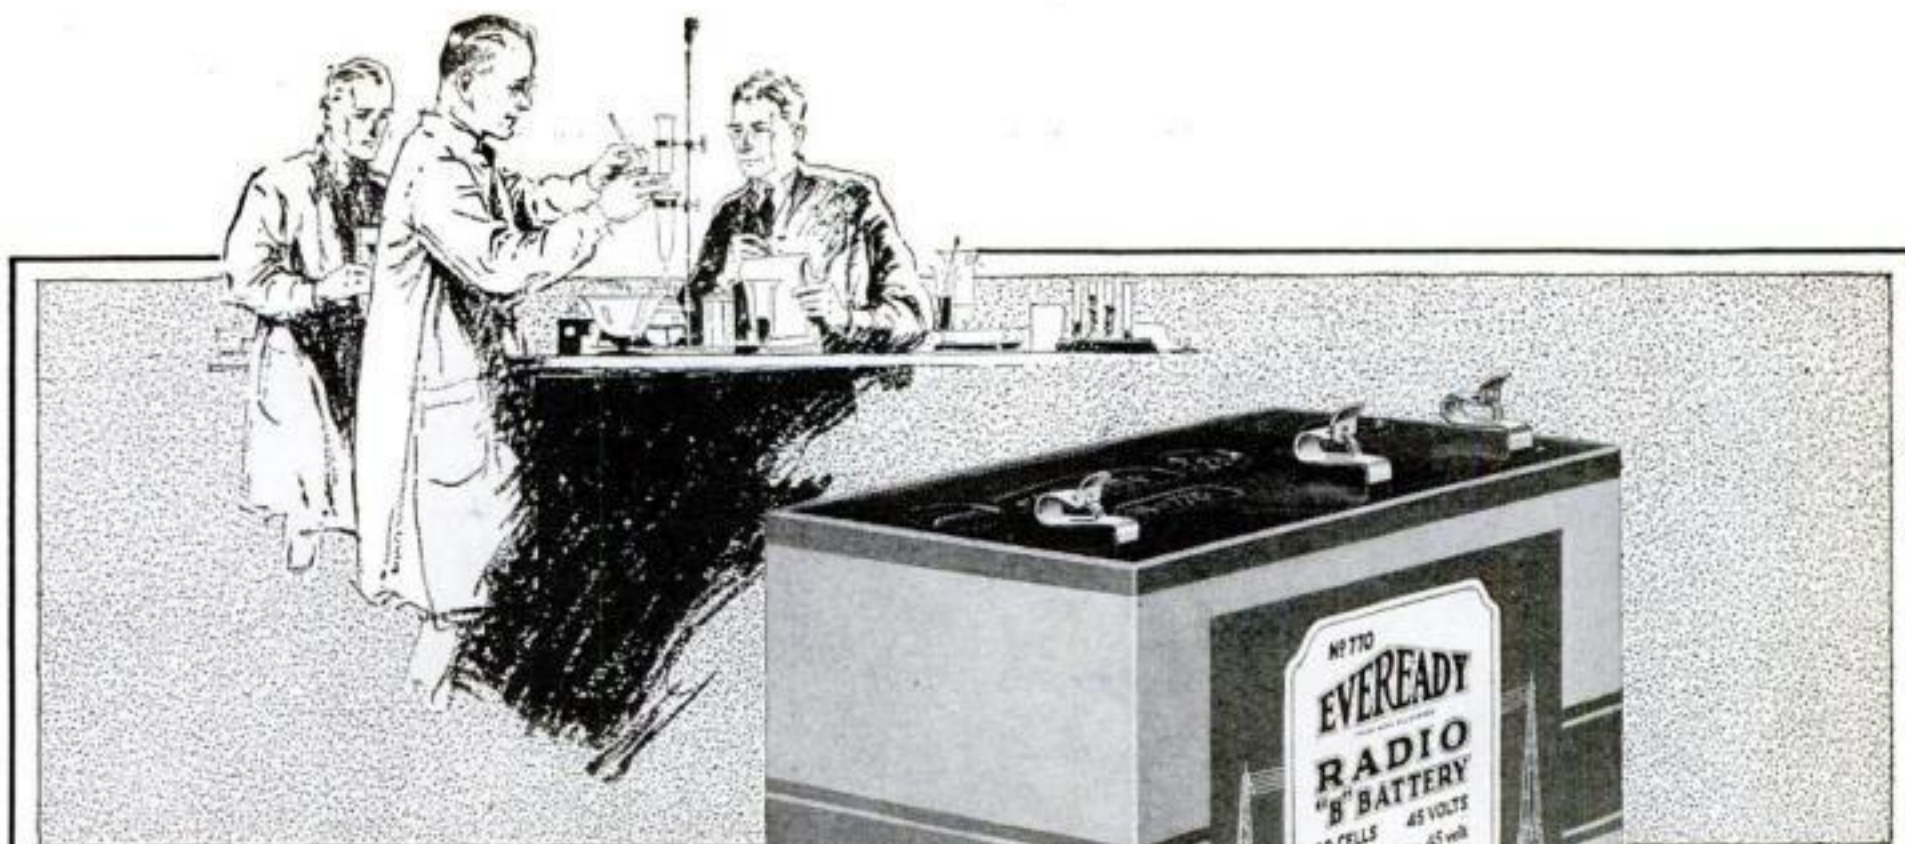

*Dry "B" Batteries  
are an economical,  
dependable and  
convenient source  
of plate  
current!*



*No. 770. 45-volt  
extra large ver-  
tical. For heavy  
duty only. The  
ideal "B" Bat-  
tery for use on  
multi-tube sets.  
Price \$4.75.*

## Scientists constantly improve battery quality

EVEREADY "B" Batteries today contain more electricity, more service, more satisfaction than ever before.

Processes evolved by the scientists of the Union Carbide and Carbon Research Laboratories, Inc., when put in effect in the Eveready factories, are responsible for this great accomplishment.

At the same time the factories have effected a still higher standard of workmanship. A system of inspection that is a marvel of efficiency was inaugurated. The results, gratifying beyond measure, were accomplished with a speed and completeness that have few parallels in industry.

The final tests showed more electricity, more battery service, greater Eveready satisfaction without increasing battery sizes and with a substantial reduction in price. "B" Battery operating costs, using the new Evereadys, in most cases show a reduction of at least one-half.

There is an Eveready Radio Battery for every radio use.

Insist on Eveready "B" Batteries.

Manufactured and guaranteed by  
**NATIONAL CARBON COMPANY, INC.**  
Headquarters for Radio Battery Information  
New York San Francisco  
Canadian National Carbon Co., Limited, Toronto, Ontario

IS

# EVEREADY


## Radio Batteries

*-they last longer*

EVEREADY HOUR  
EVERY TUESDAY at 9 P.M.  
(Eastern Standard Time)  
Broadcast through a chain of prominent  
interconnected radio stations.



# You have the

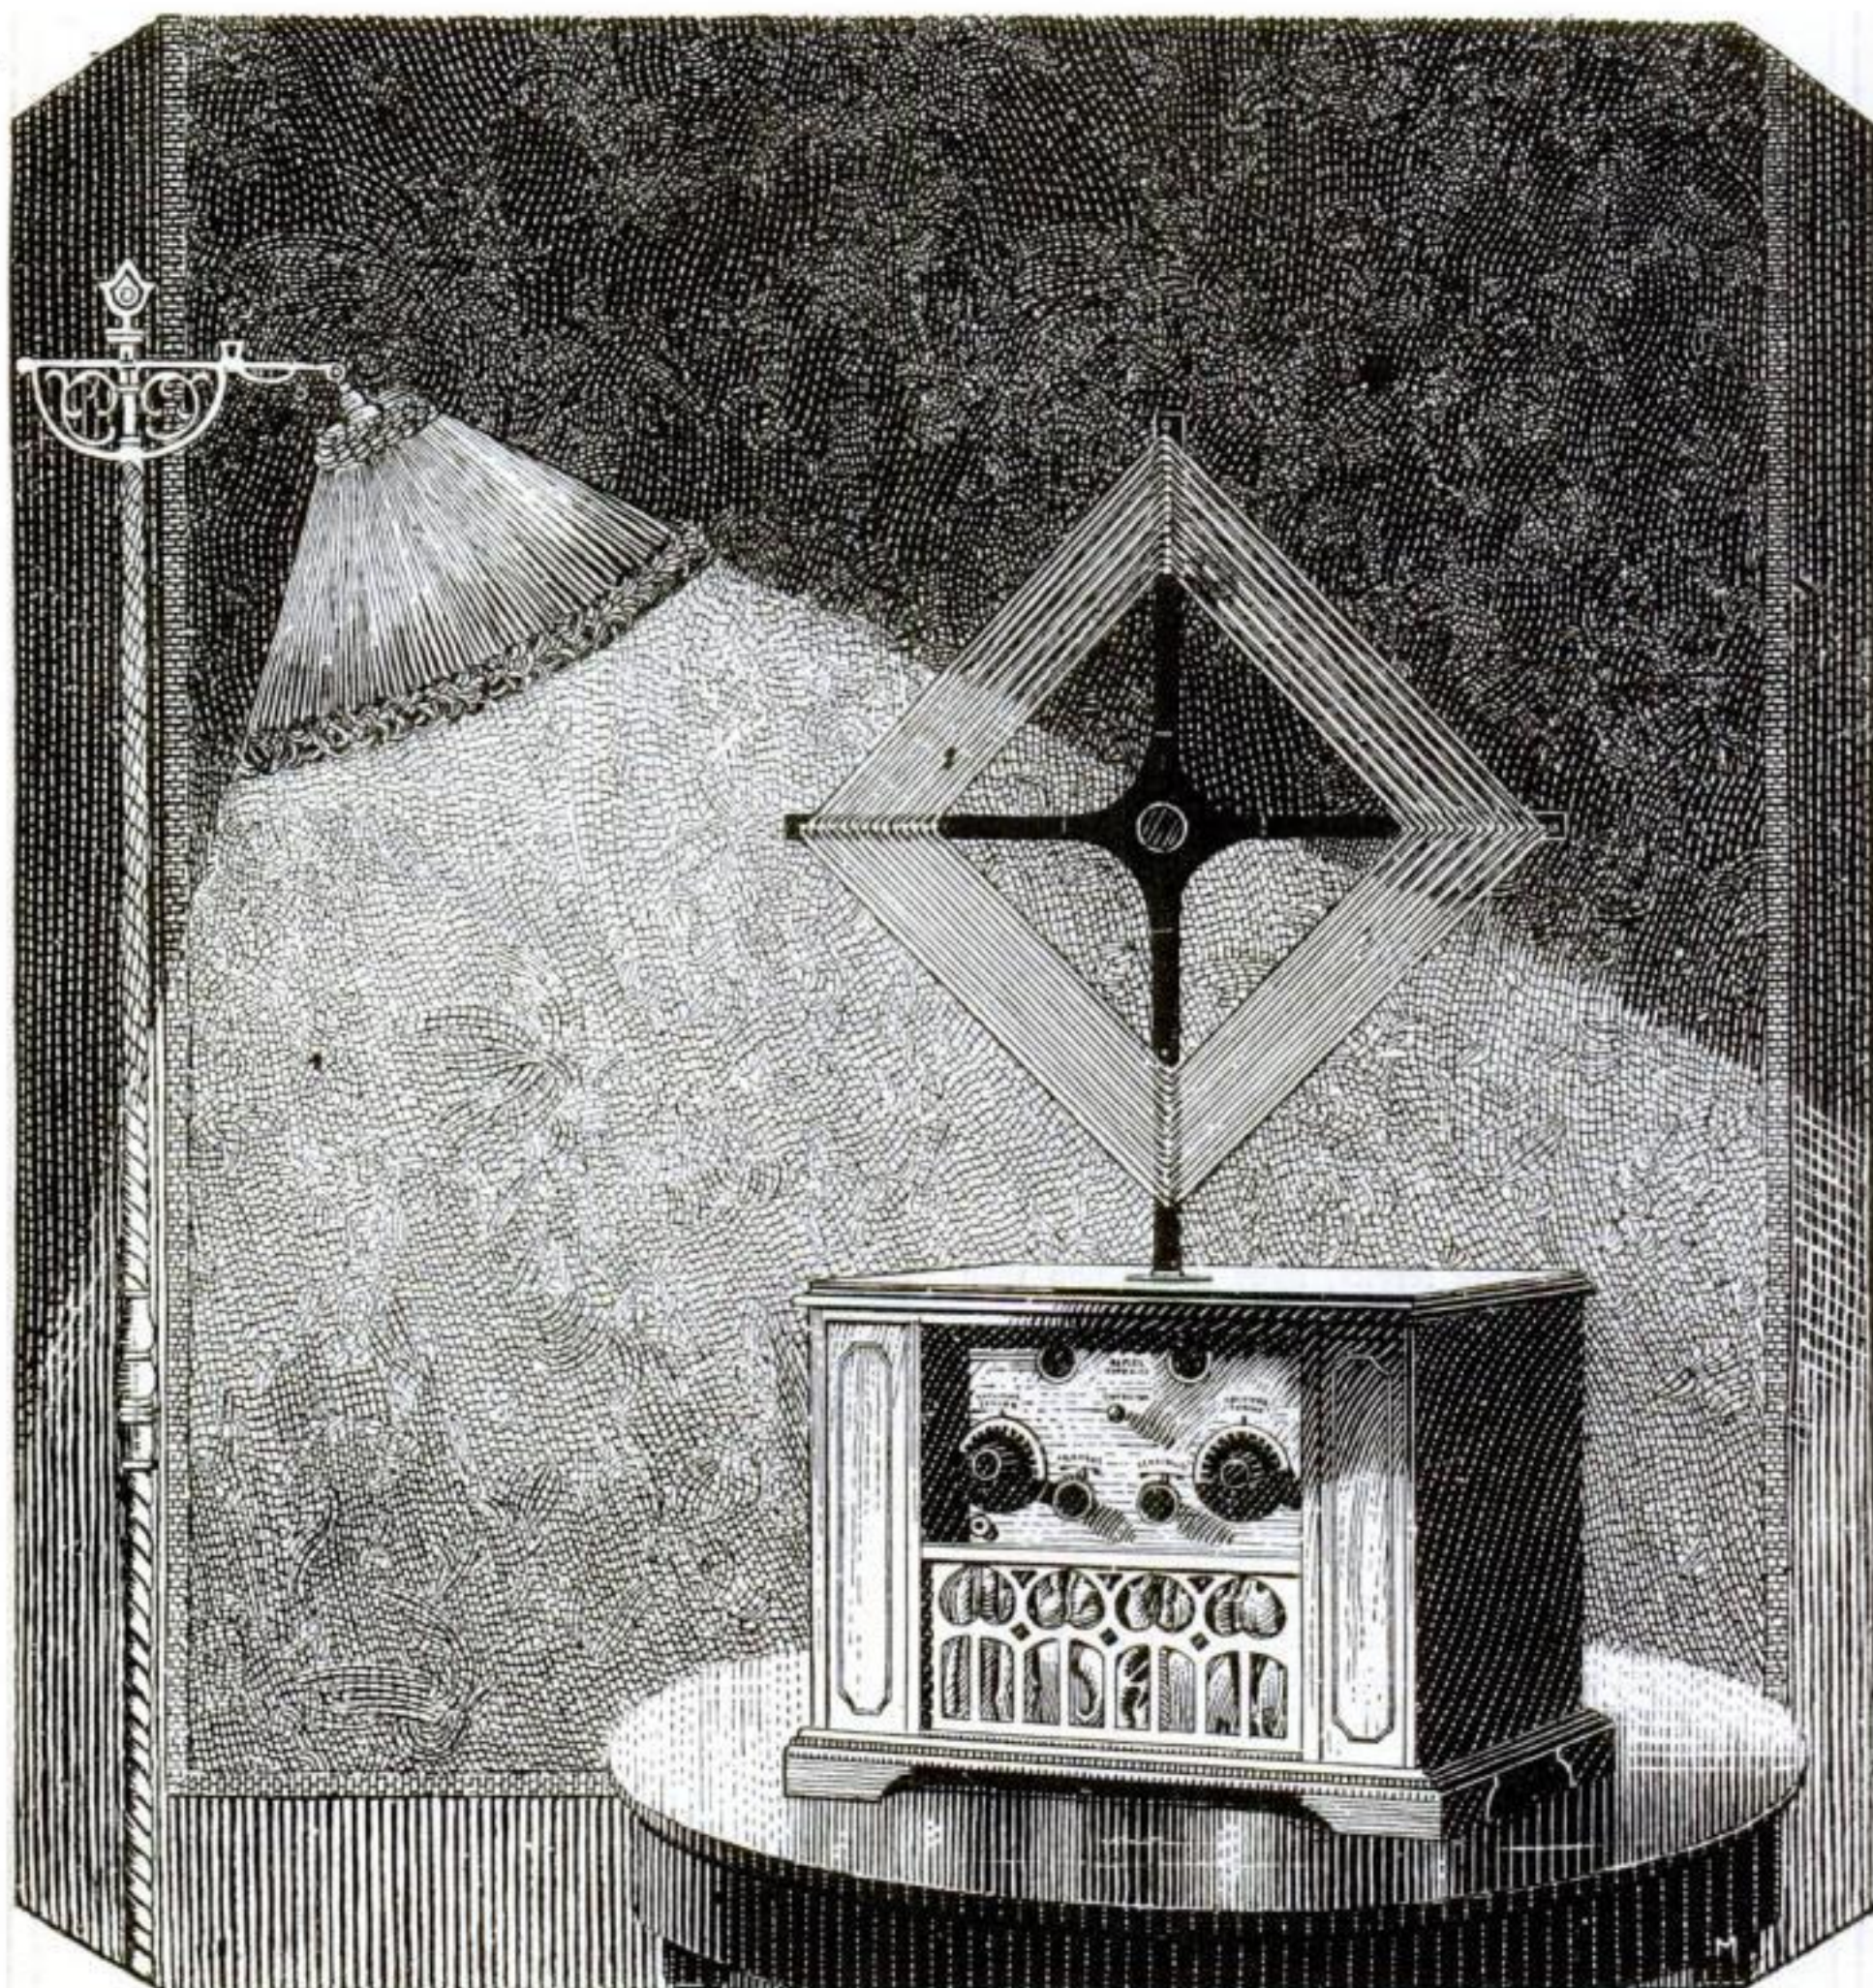

## De Forest Radiophone

*Requires no aerial — no ground wire*

Batteries, De Forest Loud Speaker and Tubes complete within cabinet. Ready to operate within five minutes

after delivery. Easily movable from room to room. Unsurpassed in purity of tone quality. Hear it and know.



# radio habit now!

## *You'd better have a De Forest*

**W**HETHER you have an instrument or not, whether you know it or not, you have the radio habit already. Do you go to the theatre? Do you go to political meetings? Do you read the day's news? Do you seek contact with people who offer either amusement or information? Then you're essentially a radio fan, for many of the best of these things radio is giving in a way that they cannot be obtained elsewhere.

Do you know what Lee De Forest means to radio? He is to it what Edison is to electricity. Naturally the De Forest Radiophone is considered standard—and its definite advantages justify its popularity.

The De Forest Radiophone is a complete and self-contained instrument with a loop the size of a picture frame instead of an aerial wire, with batteries, tubes and De Forest Loud Speaker complete in one artistic cabinet. Here is an instrument that can be easily moved from room to room. It has a remarkable tone quality. It brings out the voice or instrument as sincerely and truthfully as the performer himself does—and clears itself

(with the right dial settings) from disturbing or metallic noises. Its range is unexcelled by anything in the radio-ways! And it is an immediate result-getter that is simple to operate!

Whatever there is in radio, De Forest can give it to you. It yields good results from the beginning and gradually increasing results as your skill grows.

*It will pay you to look up  
a De Forest Agent*

De Forest from first to last stands for all that is substantial and thorough and fundamentally right in radio. De Forest agents are qualified to give sound and practical advice and help in radio. When you find the De Forest agent in your vicinity you find a man who knows radio—a man who has given us his word that he will see that every instrument he sells is thoroughly inspected and properly serviced after the sale. Avail yourself of his help. He desires, as do we, that you should get the fullest enjoyment and satisfaction from your instrument.

**DE FOREST RADIO CO.**  
Jersey City, N. J.

### **Your Tubes are the key to your radio reception**



**DV-2**

If you know what the tubes do in a radio set, you'll know why nothing but De Forest Tubes will do.

Used as detectors or amplifiers, these tubes combine ideal operation with long life, sturdy strength and freedom from microphonic noises.

DV-2, for storage batteries, requires a filament potential of  $4\frac{1}{2}$  volts, and has a current consumption of 25/100 of an ampere.

DV-3, for dry batteries, requires 3 volts on the filament, and consumes 6/100 of an ampere.



**DV-3**

The "Magic Lamp" of Radio

# DE FOREST

REG. U.S. PAT. OFF.

# RADIOPHONE

REG. U.S. PAT. OFF.



# SAND'S LEVELS



## Accurate and Light

THIS is the level you want for overhead work. It's so light you can use it all day without tiring. And it's handier to get hold of, too.

You can read it from any angle, even in dim light.

It's accuracy is permanently built in at the factory—you can depend on it, year in and year out.

### Favorites Everywhere

Sand's Levels have made good on the job for thirty years. If you like good tools you'll appreciate the many advantages of a Sand's Aluminum Level.

**24" 6 Glass Aluminum \$5.50**  
Others proportionately low.

Also a complete line of wood levels for every purpose.

Look for the Name on the Genuine

At Good Hardware Stores Everywhere,  
or sent direct upon receipt of price  
and your dealer's name and address.

**SAND'S LEVEL  
& TOOL CO.**

5849 Fischer Ave., Detroit, Mich.

## The Home Workshop

### How to Cut an Attractive Archway

By Edwin M. Love

IN MANY sections of the country, especially where architects of the first rank have influenced the design of small homes, it is now the custom to connect the living-room with the dining-room by means of a large plastered opening without doors or portieres.

If properly designed, such arches lend simple dignity to the rooms. They make more convenient the handling of guests at entertainments and give the effect of a single large room, while affording corners for the gathering of small, congenial

or else the "spring"—the beginning of the curve—will be on a level with the doors and windows of the two rooms involved.

The design and location being settled upon, lay out plumb lines on the partition. Cut the plaster to the line with a cold chisel and hammer and remove to a point 2 in. below the ceiling or 1 in. below the picture molding. Then cut away the lath with a compass saw. For structural reasons it is best to make these side cuts 2 in. inside the side studs.

Remove the debris, carefully punch a hole in the plaster on the opposite side near the floor, and repeat. Next, determine if the ceiling joists bear on the partition; if they do, shore them up in both rooms by forcing smooth planks against the ceilings with two-by-fours that rest on suitable blocks on the floor.

Cut the studs off on a level  $4\frac{1}{2}$  in. above the finished height of the opening




Plastered archways like this are becoming increasingly popular in well-designed small homes

groups. They also afford better opportunities for a unified scheme of interior decoration and an artistic arrangement of furniture.

By reason of their adaptability to a variety of shapes and sizes of rooms, and the ease with which they can be built, arched openings can be constructed by any man reasonably familiar with the use of carpenter's tools. The procedure is largely the same, whether sliding doors, French doors, or single doors are to be removed in favor of the arch.

In designing the opening, attempt to center it on one or both of the rooms, although this may be impossible. Balance is the thing to consider, as well as the relation of the archway to doors, windows, and furniture.

The arches best suited to this work are illustrated. Simplicity should be the keynote, as any attempt at elaboration is almost certain to result in poor design. For most houses the ellipse is preferable. Try to make the opening noticeably narrower or wider than it is high; and take care that either the top of the arch

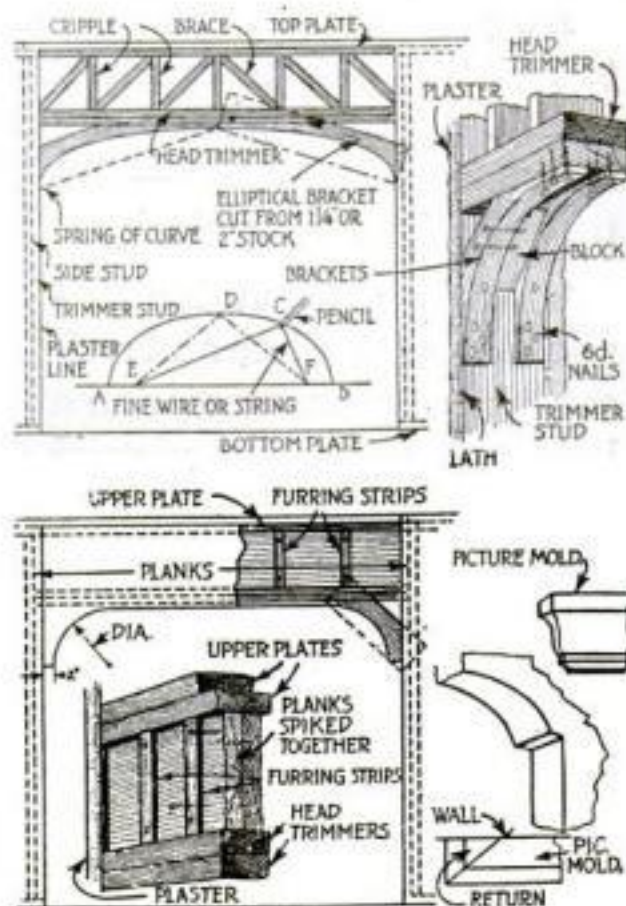


Two methods of framing an arch, how to lay an ellipse, and some other helpful details

and remove them. Cut two trimming headers out of stock the same size as the studding, making them equal in length to the distance between the side studs. Spike them solidly together and drive up against the "cripples," or short studding above. In case these cripples are less than 1 ft. long, it is advisable to remove them also and substitute two planks of suitable width spiked together and forced up against the plate edgewise, the trimmer in turn being secured to it. Spike the ends to the side studs and double the latter by cutting extra studding to a driving fit under each header end. Nail all securely.

The ceiling shores now may be removed. Using  $1\frac{1}{4}$ -in. or 2-in. pine stock, lay out the necessary curves,

(Continued on page 126)



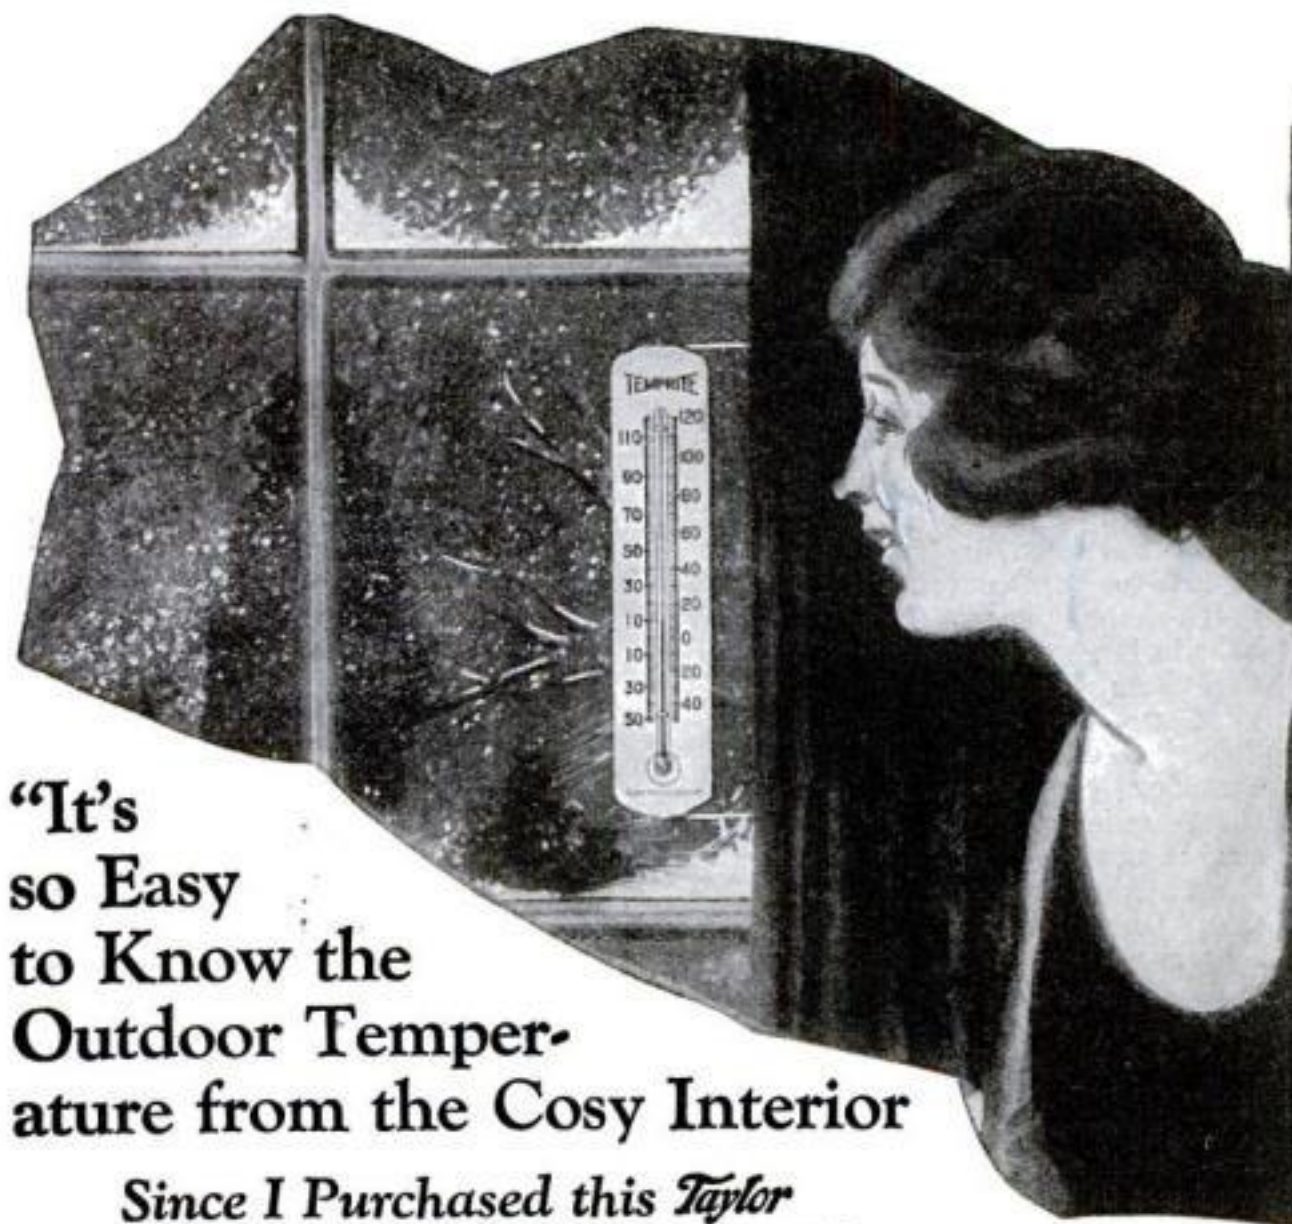

**"It's  
so Easy  
to Know the  
Outdoor Temper-  
ature from the Cosy Interior**

*Since I Purchased this Taylor  
Temprite Window Thermometer*

**N**O DRAUGHTS on Grandad or the baby crawling on the floor, caused by opening the doors, stepping out in the shivery weather to read the thermometer the old fashioned way, suddenly lowering the room temperature—I just glance through the window at my Temprite. I keep the cold outdoors where it belongs. It means comfort and convenience. We all dress for the weather. I dress the children accordingly for school. It's a health factor, I feel, for the whole family. And it adds a cheery touch to our home."

The illustration at right shows this superior Temprite Window Thermometer full size. The printed page cannot convey the attractive appearance. Metal, white enameled back. Weather proof. Can be read at a distance of 15 feet. Large clear numerals and markings, fadeless colored liquid in a magnifying glass tube. Comes with window brackets and nails for easy attaching to outside window frame. Adjustable to proper angle for reading the temperature from inside—and outside as well.

Possesses three essentials of thermometer character, ACCURACY, SERVICEABILITY AND ATTRACTIVENESS.

In it we have accomplished our desire to create a reliable Window Thermometer for the multitude to sell for \$1.00. The Taylor Temprite is readily distinguished from the mediocre.

*Don't deny yourself the use of this distinctive thermometer another day!*

Others are enjoying the comforts and convenience it brings. Why not

you? Easy of accomplishment—stop at your dealer's on that shopping trip, or phone the "Mister" to bring one home tonight.

You can now own this reliable Thermometer for a dollar—a small purchase that adds a touch of completeness to the home.


If not obtainable through your regular dealer, we will ship one postpaid east of the Rockies, upon receipt of \$1.00. West of the Rockies, \$1.10; Canada, \$1.35. Safe delivery guaranteed.

To test for readability pin this advertisement up across the room. This illustration is full size.

**Taylor  
TEMPRITE  
DOLLAR  
WINDOW THERMOMETER**

Canadian Plant:  
Tycos BUILDING  
TORONTO

**Taylor Instrument Companies**  
AMES ST. at WEST AVENUE, ROCHESTER, N.Y. U.S.A.

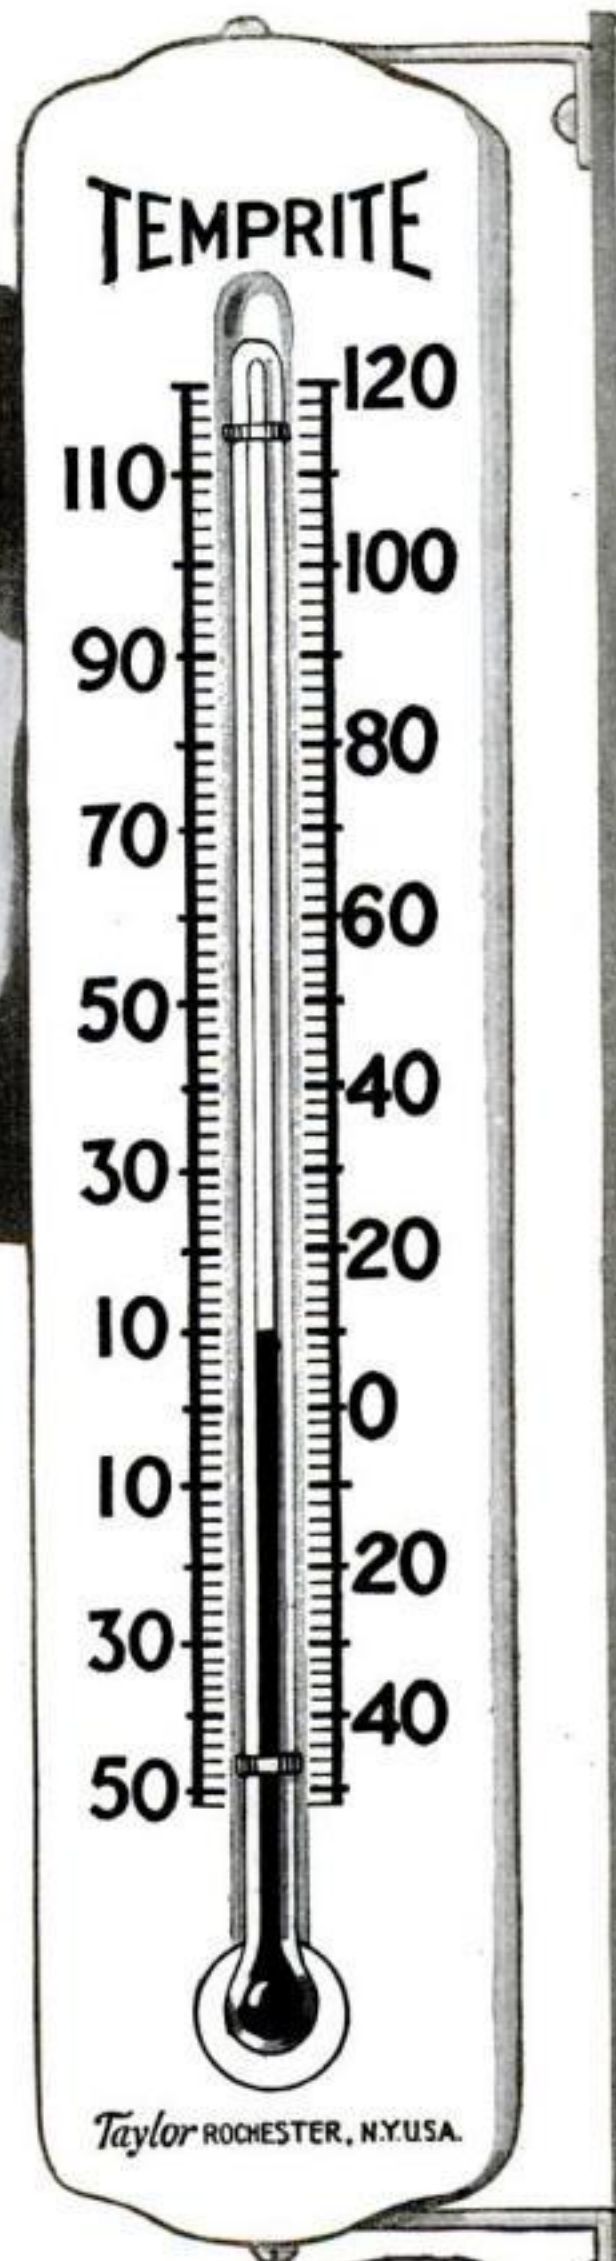

**Taylor Instrument Companies**  
Ames St. at West Ave., Rochester, N. Y.

Please send me at once one Taylor Temprite Window Thermometer for which I enclose \$\_\_\_\_\_ I understand you guarantee safe delivery.

Name \_\_\_\_\_  
Address \_\_\_\_\_ State \_\_\_\_\_  
City \_\_\_\_\_  
Dealer's Name \_\_\_\_\_

PS-2

THE SIXTH SENSE OF INDUSTRY  
**Tycos Temperature Instruments**  
INDICATING • RECORDING • CONTROLLING





Ask  
such men  
as these



In 1843 David Maydole, the founder of the business said, "I make the best hammer." And throughout the history of the manufacture of Maydole Hammers the standard established by the founder has been adhered to.

—Men whose livelihood depends upon the quality of their tools almost as much as on their personal skill. They'll tell you —almost without exception—that they prefer

## MAYDOLE HAMMERS

Here's why! There's "hang" to a Maydole Hammer. There's just enough crown to its face; there's a grip to the claws that only a Maydole has; and, there's the material and workmanship that have made Maydole Hammers famous since 1843.

The head of every Maydole Hammer is of finest, press-forged steel. It costs more to make, but it gives the metal a toughness that can't be had by other methods. Take a look at the claws—see how they're backed off to give a perfect grip on the nail and the maximum of strength. You can "pull" anything with a Maydole. Then look at the handle—perfect, clear, second-growth hickory, air dried for years.

And up on the head, you'll find this stamped, "D. Maydole"—a pledge that it's the best hammer we've learned to make in our 80 years.

Ask your hardware dealer—he knows Maydole Hammers. Write us for useful handbook and catalog 23-B.

THE DAVID MAYDOLE HAMMER CO.  
NORWICH NEW YORK

7543



# The Home Workshop

## Snowball Press for Winter Battles

WHEN sides are lined up for a good, old-fashioned snowball battle, the team that usually wins is the one best able to hurl over the ammunition. This depends upon the supply as well as the accuracy of throwing.

The press illustrated has been designed to turn out rough-shaped snowballs in large quantities. As they are piled up, the men doing the actual throwing can press them quickly into sizable use and hurl them at the opposing side. One man with a press can keep half a dozen combatants supplied with potential snowballs for defense.

To make a press, first choose three round cocoanuts and saw them in half. Remove the meat and set the shells aside to dry thoroughly. Meanwhile make two levers from hard wood  $\frac{3}{8}$  in. thick and 3 in. wide. Handles

should be shaped at one end of each and a hardwood block screwed to the opposite end. The total thickness of the two blocks should be slightly greater than the diameter of one of the cocoanuts. Then hinge the blocks together as shown.

Drill a small hole in the exact center of each half coconut shell, being careful to keep the proper pairs of shells together. Then fasten three halves to the inside of one of the levers and the corresponding halves to the inside of the other lever so that when the levers are closed the halves will meet exactly. Use brass or galvanized screws. Oil the completed press with linseed oil. In preparing ammunition for battle it is advisable to pile up a heap of light snow in a position where the ammunition makers will be protected. They scoop up snow in their presses, squeeze the handles together, and turn out the snowballs.



The press "roughs out" snowballs very quickly

## Speedy Coaster Has Corrugated-Iron Bottom

COASTING sleds and double runners are always more or less expensive to build. The coaster I am going to describe, however, is one that can be constructed very cheaply.

The running surface is composed of a sheet of old corrugated-iron roofing nailed to a flat board surface with the seat mounted just above it on two blocks. It is steered by means of a "rudder" operated by a steering wheel mounted at the front. The wheel can be picked up for a few cents at any second-hand auto yard.

This coaster is especially fast and it must be steered with caution because of the long run of the bottom.

With four or five passengers, it will be found a steady and speedy conveyance and one that will furnish lots of fun for the builder.

The foundation for the iron is either one board 18 in. wide and 9 ft. long or, better and cheaper, two boards cleated together. Cut out four curved forms as indicated from good, strong wood about 10 in. wide. Cut a notch at the front end of each, as shown.

Nail the four forms to the edges of the bottom boards and connect them in the notches at the front by means of a cleat. Then turn the frame over and nail a sheet

of clean-surfaced corrugated iron to the under side so the corrugations run lengthwise. Use flat-headed nails and drive them through the hollows of the iron.

When it comes to turning the iron up the sweep of the forms, bend it gently and nail frequently as you go along so that it will not crinkle or have sharp breaks in the corrugations.


Next, spike two blocks to the frame as

supports for the seat board. These should be at least 12 in. high and well fastened. The seat is a plank 12 in. wide and 12 ft. long, with the corners beveled off as a finish. Nail it to the blocks so that the front end comes flush with the cleat across the

ends of the forms, to which it also should be nailed.

The coaster is steered by a "rudder" made of strong wood of the shape indicated. The bottom edge should be shod with strap iron and the back edge fitted with a shaft to fit in two holes, one in the bottom board cleat and the other in the seat. An iron tiller rod is forced through the center of the rudder.

Make a wooden drum and fasten it to the shaft of an old auto steering wheel. Then run strong lines from the tiller ends and after connecting them make several turns about the drum.

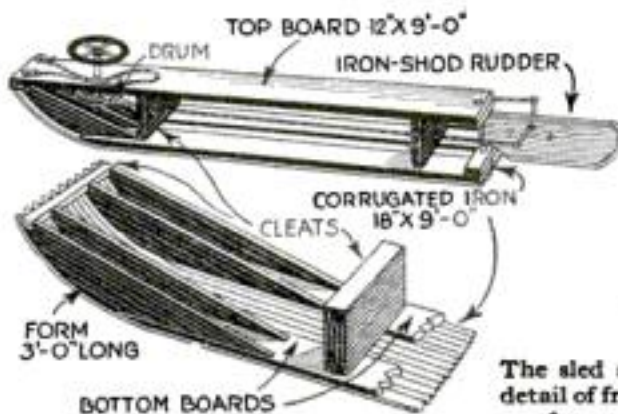


The sled and detail of front forms



*A New Star*

*The Eaglet* 3 Tube  
Dry Cell  
**Neutrodyne**

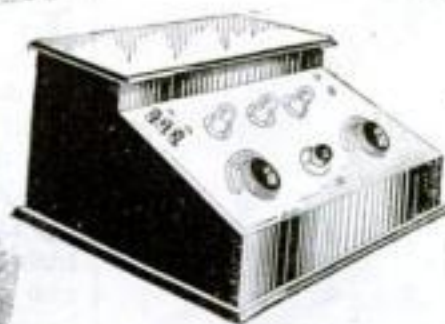

**\$ 75**

**The World's Wonder Set  
at a Popular Price**

*Manufactured and Guaranteed By*

**EAGLE RADIO CO.**

*Makers of*

**The Famous Models A and B  
EAGLE Neutrodyne Receivers**

Your protection for quality  
and unsurpassed

**VALUE**

Ask the dealer—he knows



**EAGLE RADIO CO.**  
16 Boyden Place, Newark, N. J.





# Power to Turn 'em



You can depend upon a sturdy Snap-On to turn the most tightly "frozen" nut.

There's a special Snap-On handle combination for fast work in every hard-to-reach place.



Snap-On engineers have made an individual selection of Snap-On handles and sockets for each individual make of car. This is the Ford Set. A diagram in the lid of the box shows the different nuts and bolts each wrench will reach and turn. Just follow the diagram and repairs on the Ford are made easy. Write for full information about the selected Kit for your car.

Look for the name—without it no wrench is a genuine Snap-On

**Snap-on**  
INTERCHANGEABLE  
Socket Wrenches

Snap-On Wrench Co., Mfrs.  
Milwaukee, Wisconsin

DISTRIBUTORS  
**MOTOR TOOL SPECIALTY CO.**  
14 E. Jackson Blvd., Chicago

Gentlemen:  
Please send me full particulars about Snap-On Kit for.....car. (If interested in Master Mechanic's Kit for all cars check here)

I buy tools from.....

Name.....

Address.....


## The Home Workshop

### Easily Worked Sheet Lead Used to Ornament Treasure Chest

IN THE studio of a certain New York artist, whose work is well known to the readers of POPULAR SCIENCE MONTHLY, there was a table that always had a rather bare and forlorn appearance amid its rich and colorful surroundings. "Do you know what I think that table needs?" the artist remarked to a friend one day. "It needs a pirate's chest, brimming over with old jewelry, coins, and stones."

Instead of going out and buying a jewel case or an ornamental box to carry

This gorgeous pirate's casket is an unusually brilliant table ornament

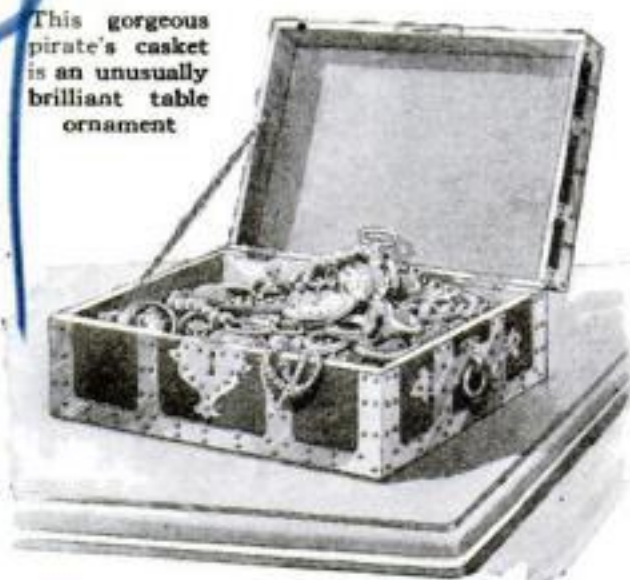

STUD-NAIL EFFECT WITH GIMP TACKS



SHEET LEAD TO IMITATE IRONWORK

The hand-wrought metal on this chest is sheet lead fastened with cut gimp tacks

out this idea, the artist hunted around and found an old oak sketching case of about the right size. He removed the partitions, cleaned out the inside, replaced a missing hinge, and fastened a heavy brass chain to hold the lid from flopping backward.

Next he visited a plumbing shop in the neighborhood and bought some thin sheet lead. At a hardware store he obtained a supply of gimp tacks. Returning

brown artists' oil colors were daubed on the lead itself in hit-and-miss fashion, and then rubbed partly off to give it an antique tone. The casket was lined with royal purple velvet and filled with old jewelry and trinkets, which were allowed to overflow onto the table.

So attractive and unusual was this ornament that visitors to the studio invariably exclaimed when they first saw it. Yet the work and cost amounted to very little, and the chest could be duplicated easily by a handy man.

Another method of decorating boxes and chests is to apply corners made as shown in the lower illustrations on this page. The design is worked out on paper full size and traced by means of carbon paper on thin aluminum, brass or copper.

One of the simplest ways of bringing out the design is to recess the background by hammering depressions of uniform depth into it with a punch. The metal should be firmly fastened to a waste piece of board while the hammering is being done.

The final step is to cut out the design and fasten the corner strips in place with brass or copper nails or escutcheon




Hammering down the background of four box corners, made in one piece for convenience

to the studio, he placed the box on the sheet lead and marked out the dimensions, as if he intended to make a metal case to cover the box.


On the lead he then sketched a design like that illustrated in the upper drawings on this page and cut out the openings with an old pocket-knife and scissors.

The sheet lead was laid over the box and hammered gently in place. Where the edges came together, the metal was peened to make an almost invisible joint. Gimp tacks were driven in to hold the lead.

The woodwork was painted a dull but glowing vermilion. Green, blue and

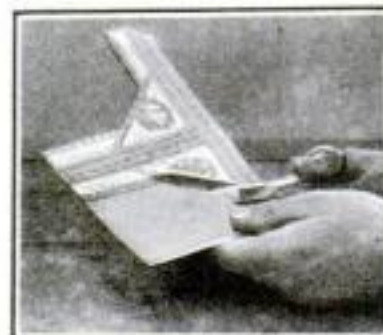

Fastening a chest corner of thin sheet aluminum in place with upholstery's small nails (at right). Sheet brass or copper may be applied in the same way

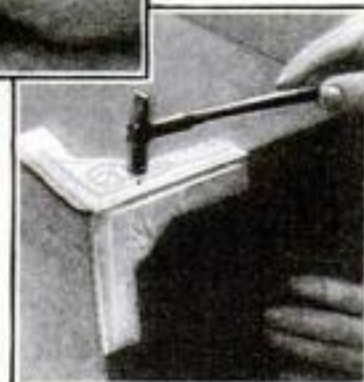

After the design is worked out with hammer and punch, the corners are cut with old scissors (at left)

pins. The corners then may be connected with longer strips, which bind the edges of the box. These may be combined with various types of central ornaments and bandings cut from the same metal.



LET the others have their card games—Grandpa settles down to real amusement—at the radio.

His dependable Brandes Headset shuts out the babble. Its *Matched Tone* gives him each word clearly—with identical tone and equal volume for both ears.

Grandpa's in a world of his own—and the game continues undisturbed. Everybody's happy!

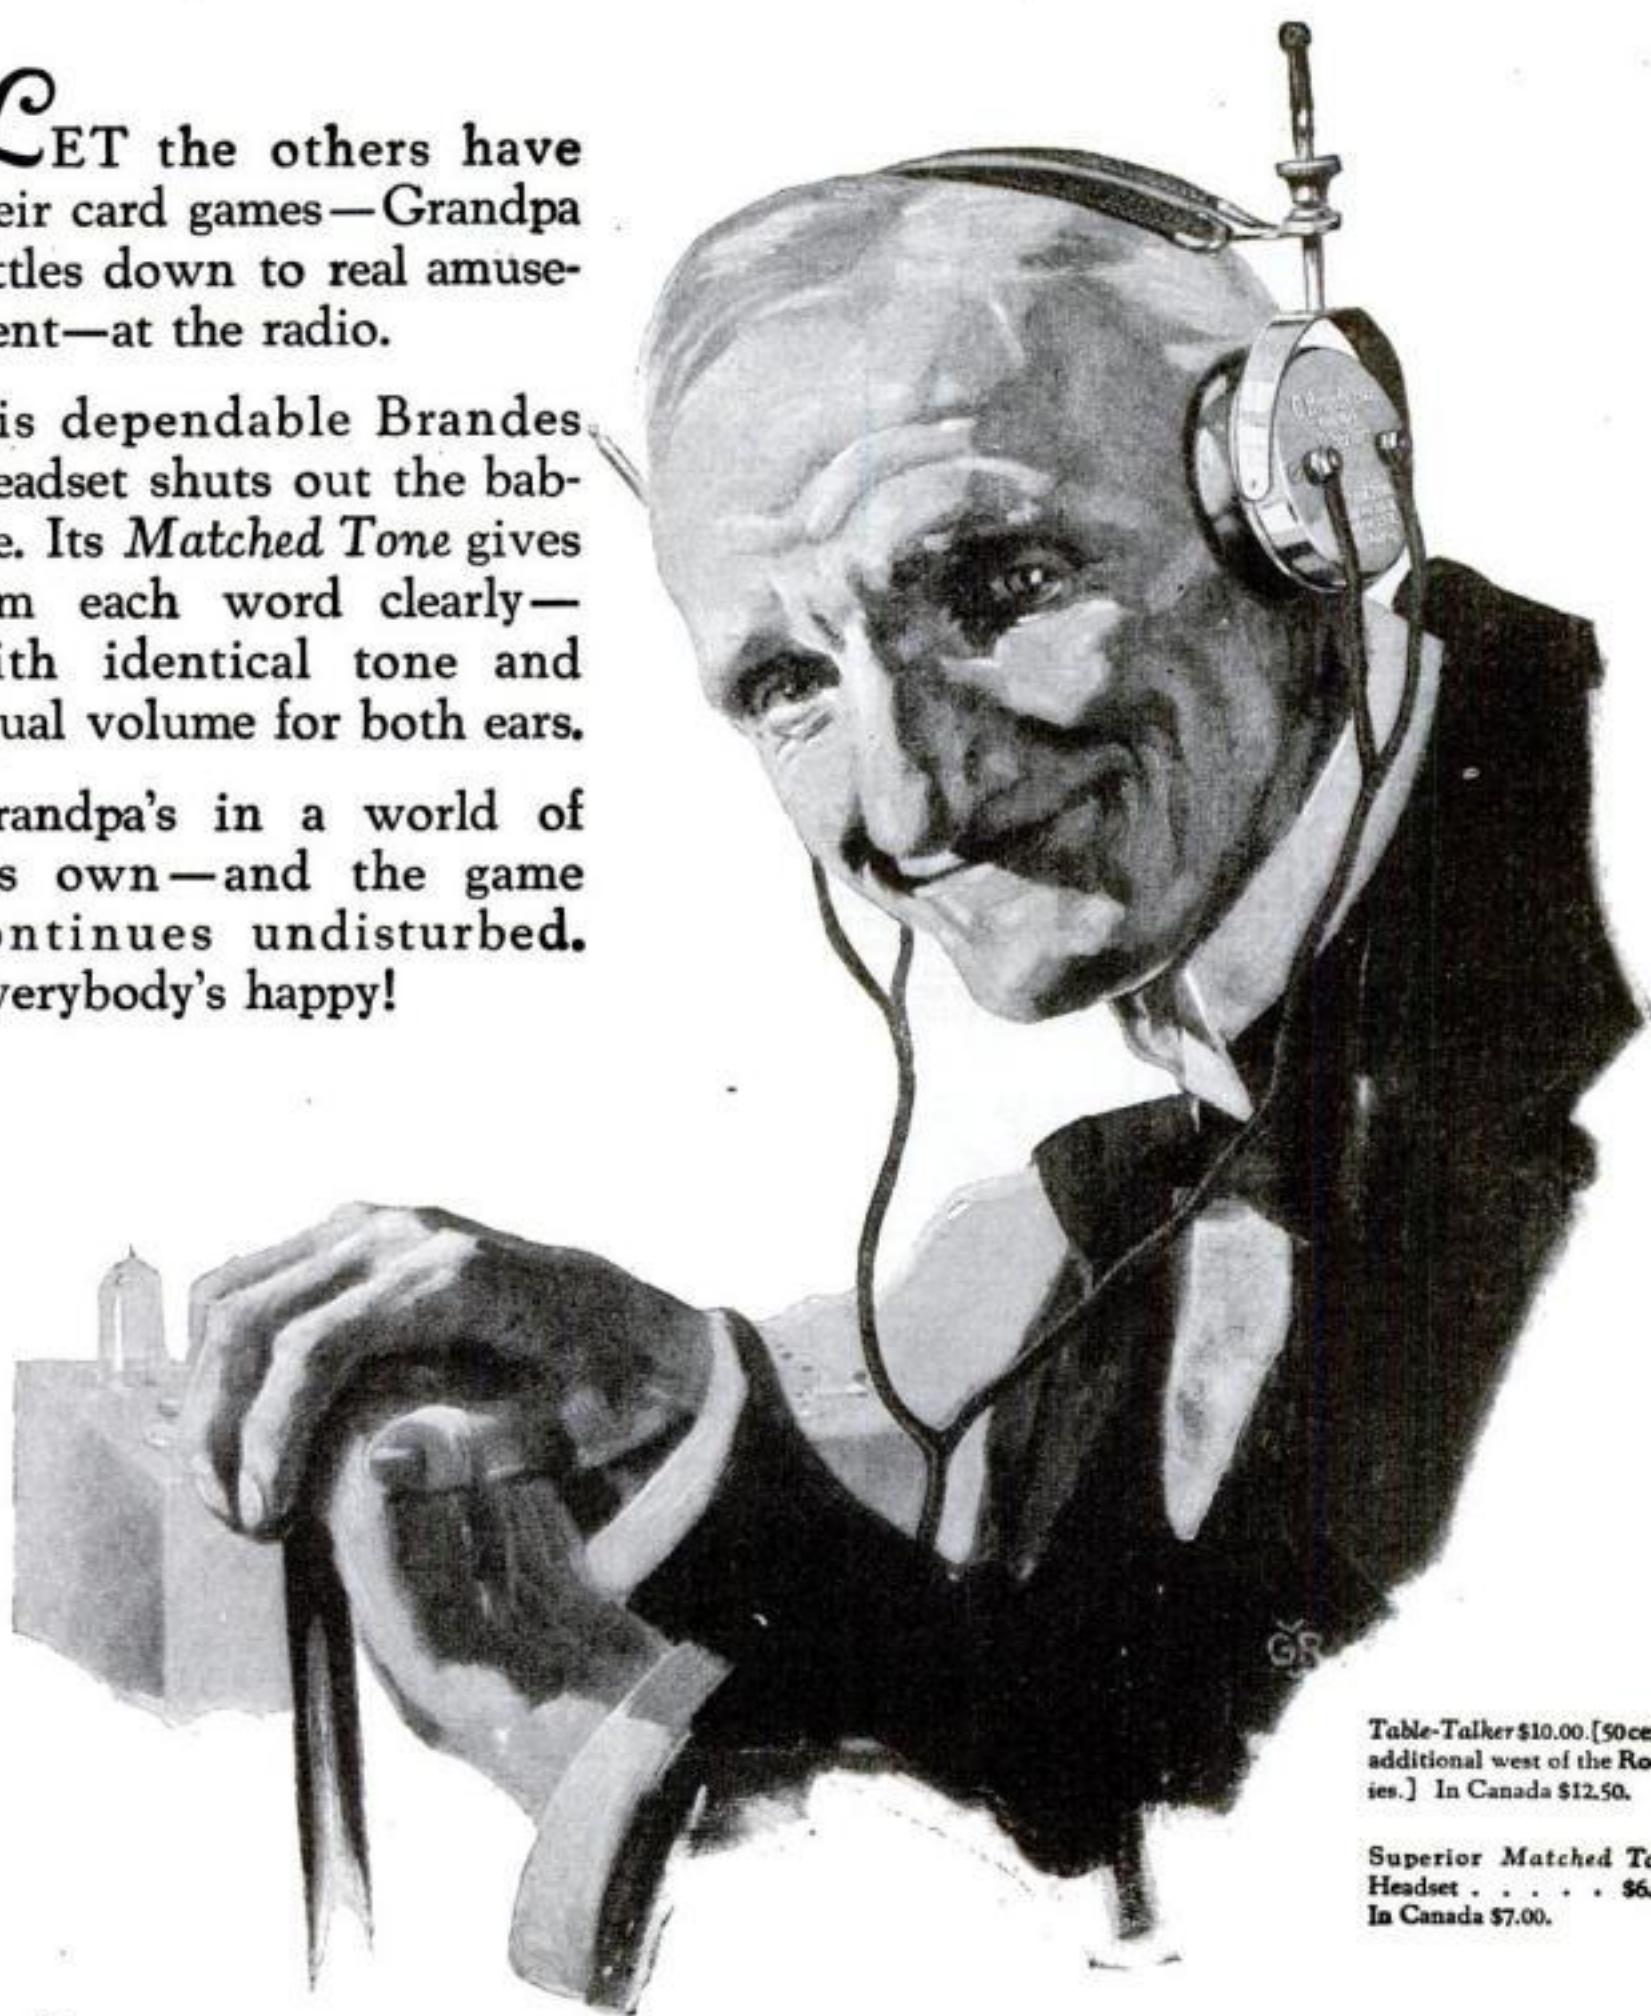


Table-Talker \$10.00. [50 cents additional west of the Rockies.] In Canada \$12.50.

Superior Matched Tone Headset . . . . \$6.00.  
In Canada \$7.00.

# Brandes

*The name to know in Radio*

© Copyrighted by C. Brandes, Inc., 1925



# Slow Machines Take the Count


Any machine that's running too slow or producing too slow gets "counted out" by a Veeder Counter.

Either the operator speeds up or the designer gets busy on improvements—and the VEEDER records the improvement.

Your machine must run well all the time, for its product must run into profitable FIGURES on a




The small Revolution Counter below registers one for a revolution of a shaft. Records output or operations of many types of light machinery; especially handy for counting the turns of radio coil winders.



Mechanism will stand a very high rate of speed. If run backward the counter subtracts. Price \$2.00. (Cut 4-5 size.) Small Rotary Ratchet Counter to register reciprocating movements of small machines, also \$2.00.

## Speed Counter

Here's the handiest instrument for finding revolutions-per-minute of a shaft or flywheel. You hold the tip of the counter against end of revolving shaft; press lightly when the second hand of your watch comes to 0; release pressure when minute is up. A spring clutch controls the recording mechanism.

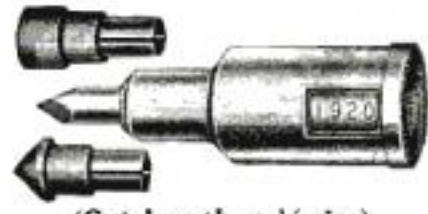

(Cut less than 1/2 size)

The Veeder Speed Counter enables you to keep motors, engines, generators, line shafting and machines operating at efficient speeds. Price, with two rubber tips, (as illustrated) \$3.50.

FREE—The 80-page Veeder booklet of counters you'd like to see—and set working.

The Veeder Mfg. Co.,  
44 Sargeant St. Hartford, Conn.

# The Home Workshop

## Making a Wash-Boiler Sport Sled

THIS sled, painted in red or yellow and black, will be the envy of every boy in the neighborhood. It requires a little skill in fitting the pieces, but there is nothing really difficult about the construction, and the cost for materials is small.

By Dale R. Van Horn

Above deck, the 3/4-in. pipe is threaded


(short enough to work easily when the dash or hood is in place) and a quarter-turn coupling turned on. A straight piece of pipe then is screwed in to form the tiller. After this is done, a hole should be drilled through the lower end of the coupling and the top of the vertical pipe and a small bolt put through.

The top of the frame is covered with 1/2-in. wainscoting. The hood is attached

There is a certain "snap" and class about this racer not found in most home-made sleds. It has a cowl or dash and a comfortable padded seat patterned after the seat of a sport car.

Here is a list of the materials required:

- One old wash-boiler, preferably copper.
- A Hickory, ash, or elm stick 14 ft. long and 1 1/4 in. square.
- Three cross pieces, 1 1/2 by 2 1/2 in., elm or fir, 24 in. long.
- Two cross pieces 1 1/4 by 1 1/4 in., elm or fir, 18 in. long.
- One pipe collar 1 in. in diameter and 2 1/2 in. long.
- A length of 3/4-in. pipe and a quarter-turn coupling.
- Two washers, some strap iron for the braces, a piece of canvas and rags for the upholstery.
- Some 1/2-in. ceiling or wainscoting (tongued-and-grooved strips of wood) for the floor.
- Three boards to make the runners.
- Some bolts and lagscrews of the sizes shown.
- Paint or varnish stain of the desired color.

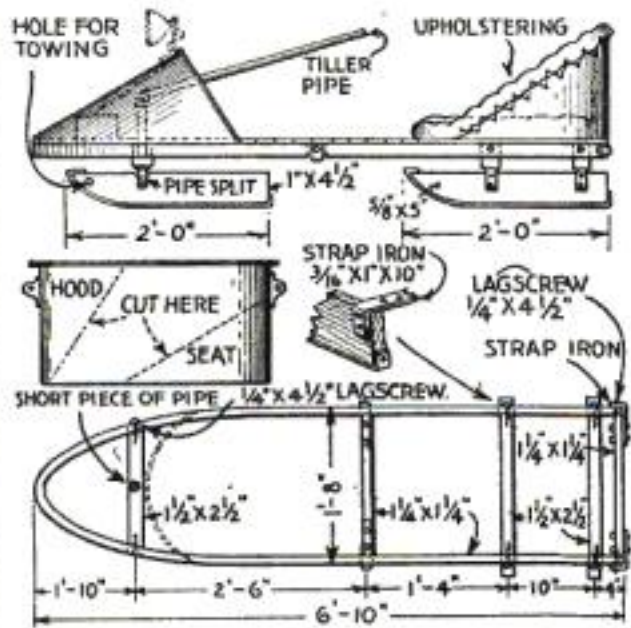

Working details of racing coaster, which has an upholstered seat and streamlined hood

The main outside strip is soaked for several hours or treated with boiling water and bent in the center to fit the curve formed by the end of the hood. This is found by cutting the wash-boiler as shown by the dotted lines to make the hood and the seat back. The rear ends of the strip are fastened by the last cross piece, which is notched to suit and held with lagscrews and strap-iron corners bolted in place.

THE middle cross piece is attached similarly, while the one in front is cut to fit snugly inside the curved sides. The upper edges of these three strips lie flush with the top of the outside frame.

The front runner is pivoted to the split pipe so that it will move freely up and down. This pipe extends through the 1-in. pipe collar, which is set through the center of the front cross piece. Two washers, placed between the split and spread end and the collar, reduce friction.

by tacking the cut edge to the sides of the frame. The original rim or flange on the boiler gives this piece a finished appearance.

The seat section is tacked down through the bottom. Small holes are drilled about the rim, 2 in. down and 2 in. apart. The sides and seat proper are padded with old rags and the canvas is cut to fit. The upper edge is laced in place. Drive nails at 2- or 3-in. intervals in both directions on the bottom to produce a real cushion effect. The nails can be clinched on the under side to prevent their pulling out.

The runners now should be put in place. Cut them as shown and cover the lower edges with light strap iron, held in place by countersunk screws. A hole is bored through the front runner for towing purposes. The two rear runners, which also are capped with strap iron, are parallel and attached by strap-iron braces bolted to the two special cross pieces as indicated. Finish the runners with a file until they are bright.

A SPOTLIGHT can be clamped to the top of the hood, if desired, with a small storage-battery set underneath the cowl.

No brake has been provided, but if one is desired, a simple strap iron, bent to the shape of a hockey stick with the end flattened and bolted to the left side, will give sufficient leverage.

If placing the feet under the hood is not comfortable, set another cleat under the frame and with the ends extending 5 in. on each side, the exact location to be determined by trial.

The canvas should be given a coat of shellac or non-injurious paint. Place a bicycle handle-bar grip on the end of the tiller, if you have an old one.





*Resonant Wood  
insures  
Tone Quality*

## Music Master Gives Life to Radio Voices

**W**ORLD fame comes to singers through a mysterious something in the voice—a personal quality that grips the hearers and holds them in a spell of delight.

When voices with delicate modulations and elusive sweetness of tone are broadcast, only a master instrument can reproduce them faithfully. Such an instrument is Music Master.

Two celebrated opera stars sing the Duet of the Flowers from Madame Butterfly. Hear the quality of greatness in their voices, as it can be heard only through Music Master.

Radio impulses entering the sensitive precision instrument in the base are translated into sound waves, undistorted and faithful to the original voice or instrument. In the tapered tone chamber of cast aluminum these sound waves grow clear and bell-like and, finally, the full, mature tones pour forth in rich resonance through the Music Master amplifying bell of natural wood.

Music Master is a musical instrument—the musical instrument of radio. Hear it at your dealer's; or, better still, have one sent to your home to prove with your own set.

*Dealers Everywhere*

**Music Master Corporation**

*Makers and Distributors of High-Grade Radio Apparatus*

10th and Cherry Streets

Chicago

PHILADELPHIA

Pittsburgh

**Music  
Master**  
RADIO REPRODUCER

Connect MUSIC MASTER  
in place of headphones.

No batteries required.

No adjustments.

MODEL VI \$30  
14 inch bell

MODEL VII \$35  
21 inch bell

MODEL VIII  
(Cabinet Type)  
with "Full Floating"  
Wood Horn \$35





Ratchet  
Shifter—  
Right,  
Left or  
Rigid  
Adjust-  
ment

It doesn't take long to put on door hinges, or to do any work where screws must be driven, if you use a "Yankee" Ratchet Screw-driver.

## Fast work with a "YANKEE" Ratchet Screw-driver

And easier work, too. One grip on the handle is all that is needed, then turn to and fro, and the "Yankee" Ratchet does the rest.

No tiresome grip-and-let-go. The Ratchet takes hold going forward, and releases coming back. It does the work and saves your muscles.

Once you have used a "Yankee" Ratchet Screw-driver you'll never be without it.

No. 10 (Illustrated) comes with 2, 3, 4, 5, 6, 8, 10 and 12 inch blades.

No. 11 is same as No. 10 except that Ratchet Shifter moves across instead of parallel with blade.

No. 15 has knurled thumb turn, comes with 2, 3, 4, 5, 6 and 8 inch blades. The knurled thumb turn lets you start little screws with thumb and forefinger.

### Some other "YANKEE" Tools

Spiral Screw-drivers  
Automatic Push Drills  
Ratchet Hand Drills  
Ratchet Bench Drills

Dealers everywhere sell  
"YANKEE" Tools

"YANKEE" on the tool you buy means the  
atmost in quality, efficiency and durability

Write for FREE "Yankee" Tool Book

NORTH BROS. MFG. CO., Philadelphia, U. S. A.

# "YANKEE" TOOLS

Make Better Mechanics


## The Home Workshop

### Steps and Stools for Household Use

FOR use around the home, office, or factory, portable steps made as illustrated are often useful. The handle saves stooping and makes it easy to carry the steps in one hand.

A small stool also has many uses. The legs of the one shown at the right are sawn out at one time from two boards tacked together. All the angles, except those at 45 deg., are laid out with one setting of a bevel square. The inner end pieces are cut with the grain at right angles to that of the legs and they are nailed to the

center piece and then to the legs. The top is nailed in place last of all. If plenty of nails are used, this construction is surprisingly strong.—C. F. GOLDTHWAIT.

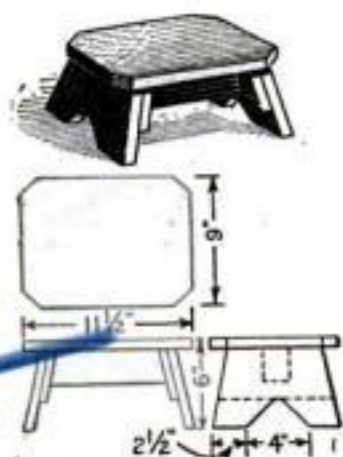

Portable steps (at left) and sturdily constructed stool (above)

### Toy Ice-Boat Sails as Fast as the Wind

SAILING a model ice-boat is a fascinating diversion from the more ordinary winter sports of skating and hockey.

To build a toy of this kind, construct a frame of two pieces of wood, one  $\frac{3}{8}$  in. by  $1\frac{1}{2}$  by 10 in., and the other  $\frac{3}{4}$  by  $1\frac{1}{2}$  by 24 in., lapped and nailed together to form a cross. Drill a  $\frac{1}{4}$ -in. hole  $\frac{9}{16}$  in. deep into the frame to take the mast. With two flat-head screws attach a wooden block 1 by  $2\frac{1}{2}$  by 7 in. to the frame at the rear and drill a  $\frac{1}{4}$ -in. hole for the rudder post.

A  $\frac{1}{4}$ -in. dowel stick, 16 in. long, serves as a mast. Two grooves are made in it as guides for the screweyes in the ends of the gaff and the boom. Three holes then are drilled near the top of the mast about  $\frac{3}{8}$  in.

apart from each other. These are for fish-line "ropes" and wire guys. The mast is fitted into place with carpenter's glue.

The runners are 1 by 2 by 7 in. wooden blocks. On each fasten a  $\frac{1}{16}$ -in. thick angle iron with a round-head wood screw. The angles should be attached to the runners with the base of the angles on the inside of the runners' center lines. The runners then are fastened with No. 6-32 round-head machine screws and

nuts to  $\frac{1}{16}$ -in. angle irons attached as shown to the crosspiece of the frame.


The rudder is a piece of sheet iron  $\frac{1}{16}$  by 1 by 5 in., with a brass shaft  $\frac{1}{4}$  in. in diameter riveted to it. The handle is fastened to the rudder shaft after assembling to the frame. The rudder is kept in a fixed position for steering purposes by the pressure of a pin in the rudder shaft against a rubber washer.

A tin cover about 4 in. in diameter is fastened to the frame to add to the realistic appearance of the toy.

To brace the mast, wire shrouds may be run from the mast top to the outriggers on each side, although these are not shown on the drawing.

The sail is made from linen, hemmed at the edges. A brass ring  $\frac{5}{16}$  in. in diameter is slipped on the gaff and another on the boom at the point indicated. A fishing line is tied to each ring and fastened to cleats. The fishing line that holds the sail in place is sewed through the sail at intervals of  $\frac{3}{4}$  in. and the ends are held in slots in the ends of gaff and boom.

Give the boat a coat of paint and a "snappy" name.—FRANK HARAZIM, N. Y.

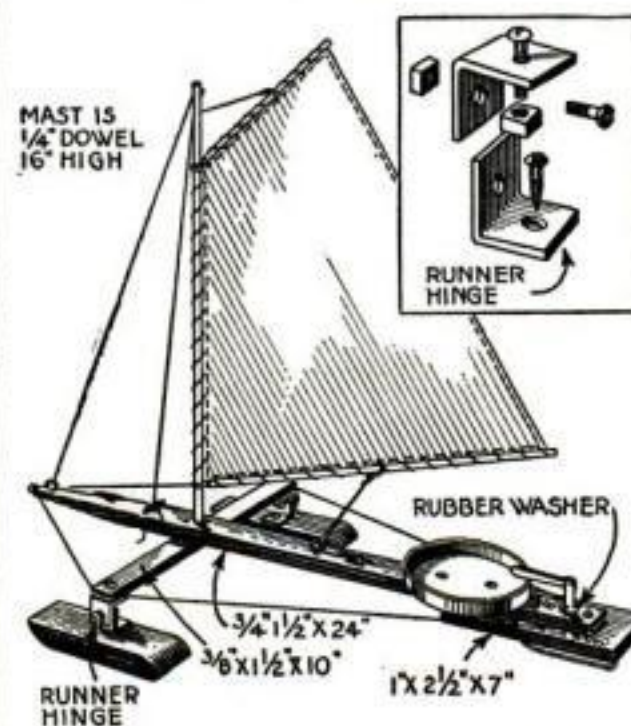

The completed toy ice-boat and detail of the angle-iron connection for each runner





# Electricity Needs You

## I Will Train You At Home

Stop right here. This is YOUR BIG OPPORTUNITY. Electricity is calling you. The Electrical Industry is the fastest growing thing in the world. It is expanding at the rate of a billion dollars a year. But it needs more trained men—big pay men. With my Home Study Course in Practical Electricity I can quickly fit you to fill one of these big-pay jobs.

### "Cooke" Trained Men Get the Big Jobs in Electricity

They get the big jobs because they are trained to fill big jobs, by a practical man who has been through the hard mill of experience himself. Here are some of the things that my "Boys" get when they enroll for my course—The lowest priced, and very best home-study Course in Electricity ever offered by any one. Any course that does not give you all these things is not a complete course.

1. Practical instructions by a practical engineer—a college trained man backed up with many years of practical experience.
2. Simplified instruction—Lessons so easy to master that lack of education or experience is no drawback.
3. Free employment service, supervised by an expert employment man, that actually gets you the job you want.
4. Special instruction that helps you earn extra money in your spare time right from the start.
5. Free complete outfit of tools and electrical apparatus—not toys but real honest-to-goodness equipment that you can use in your work.
6. Free Unlimited Consultation Service that helps you with unusual problems while you are studying and afterward.
7. Free Subscription to monthly Engineering Magazine which keeps you posted on all new developments in electricity.
8. Free use of Electrical Laboratory where you can come for actual experience or to develop an idea of your own.
9. Free Accommodations for visiting students while working in laboratory.
10. Free special courses on Radio, Auto Electricity, Electrical Drafting and a splendid Business Course for men who want to go into business for themselves.
11. Guarantee of absolute satisfaction or your money refunded.

Be a "Cooke" Trained man and get into the Big Pay class yourself. Earn \$3,500 to \$10,000 a year.

## Earn \$70 to \$200 a Week

You've always had a liking for Electricity and a hankering to do electrical jobs. Now is the time to develop that talent; and make big money out of it. Even if you don't know anything at all about Electricity you can quickly learn it through my simplified and practical method of teaching. I have trained thousands of men and put them in big-pay jobs, in all parts of the country. I can place thousands more in similar positions. As Chief Engineer of the great Chicago Engineering Works, a million dollar institution, I know where the big jobs are and what you must know to fill them—that's what I give you in my Course. Get ready now—let me train you to earn \$3,500 to \$10,000 a year.

## Be a Big Paid Electrical Expert

What are you doing to prepare yourself for a real success? At the rate you are going where will you be in ten years from now? Have you the specialized training that will put you on the road to success? Have you ambition enough to prepare for success, and get it?

You have got the ambition and I will give you the training, so get busy. I am offering you success and all that goes with it. Will you take it? I'll make you an ELECTRICAL EXPERT. I will train you as you should be trained. I will give you the benefit of my advice and 20 years of engineering experience and help you in every way to the biggest possible success.

### Valuable Book Free

My book, The "Vital Facts" about Electricity, has started many a man on the way to fortune. It shows how you, too, can quickly become a highly paid Electrical Expert. I will send a copy; free and prepaid, to every person answering this advertisement.

**Act Now!** Good intentions never get you anywhere. It is action, alone, that counts. NOW IS THE TIME TO ACT. Mail the coupon NOW.

**L. L. Cooke, Chief Engineer**  
**CHICAGO**  
**ENGINEERING WORKS**  
 2150 Lawrence Ave., Chicago, U. S. A.  
 Dept. 532

**CHIEF ENGINEER COOKE**

Chicago Engineering Works  
 Dept. 532, 2150 Lawrence Ave.  
 CHICAGO, ILL.

Dear Sir:

You may send me, entirely free, and fully prepaid, a copy of your book, The "Vital Facts" about Electricity, and particulars about your Home Study Course in Electricity and your special free features.

Name.....

Address.....

City..... State.....

# The Cooke trained man is the "Big-Pay" man



**Red Devil Tools**  **Better Made**

## "Red Devil" Pliers —Your First Choice



There are many different styles of pliers, and many different makes. You want to be sure you get the styles best adapted to your purpose, that you get properly made pliers, that

they will do exactly what you want them to do, and will last for years.

Look at the workmanship—see that the handles fit the hand snugly, and do not pinch—try the wire cutters, and see if they are properly set.

The "Red Devil" trade mark is your assurance that every one of these points has been properly looked after, in the design and manufacture.

"Red Devil" Extra Heavy Slip Joint Plier No. 1226, 7 inch size, \$1.25 each.

No. 1226

## "Red Devil" Adjustable Wrench



forged steel jaws will not spread. No. 90—sizes 4, 6, 8, 10 and 12 inches. 8 inch size, 80c each.

"Red Devil" Tools are on sale at all hardware dealers—if not in stock send dealer's name and order from us.

**Mechanic's Tool Booklet**  
**FREE**

**Smith & Hemenway Co., Inc.**  
Mfrs. of "Red Devil" Tools  
264 Broadway, New York, N. Y.

IS

No. 90



"Red Devil" Rapid Boring Auger Bits are 33 1/3% easier boring, have 10% greater clearance, and bore with or against the grain of any wood. Style 2400—10/16 in. shown here. 80c.

# The Home Workshop

## Tool Cabinet Combined with Bench


"THE bench in my garage isn't of much use," Frank Robey, a neighbor of mine, remarked one day. "It always seems to be on the wrong side or end of the car. It gets in my way when I am washing the car with the hose, and whenever I work outside, under the oak tree, the bench might as well not exist at all."

"Why don't you make yourself a portable bench?" I suggested.

As a result, Robey designed and built the tool-cabinet bench illustrated. It is



The portable bench and details of its construction

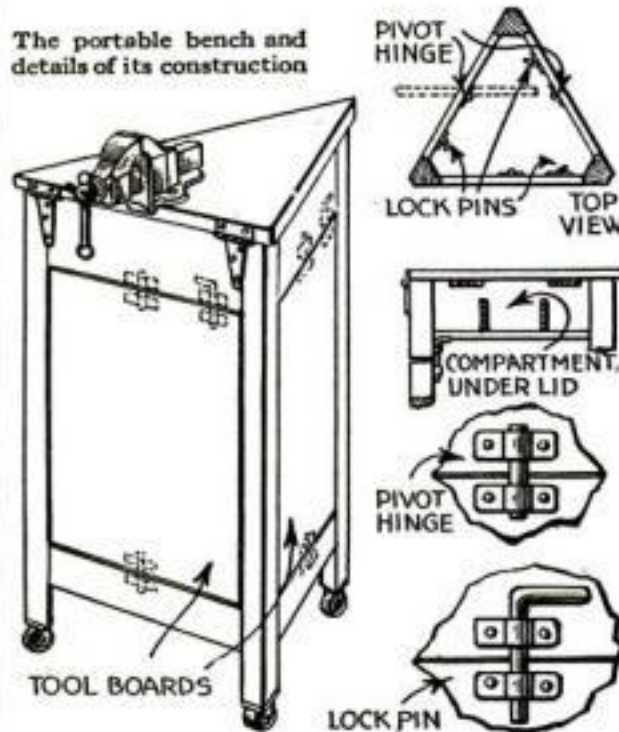

portable; it has a small but serviceable working space on top that can be reached from every side, and the tools, while instantly accessible, can be locked up.

One advantage of the bench's triangular

shape is that the casters find an even resting place on the floor or ground anywhere.

The tool boards, which form the sides of the cabinet, are pivoted at their centers so that they can be turned completely around to expose the tool equipment. The top is hinged to allow access to a compartment underneath for small tools and parts. Under the lid are three small lockpins, which hold the tool boards shut. When these pins are in place and the top is locked, the cabinet cannot be opened.

A small bench vise is placed at the hinged edge of the top so that it does not have to be lifted any considerable distance when the top is raised.—G. A. L.

## Neat Case Camouflages Alarm Clock


OCCASION recently arose in a technical laboratory to install an alarm clock. Although the best grade of alarm clock was purchased for the purpose, its nickel finish did not harmonize well with the elaborate mahogany fittings of the balance of the apparatus.



The clock was an eyesore until

the chemist in charge designed a mahogany case to hold it. The back is fastened to the wall by two wood screws. The front is hinged to the back and carries a spring catch. When the case is closed, the clock is held firmly in place by the pressure of two small felt-covered blocks.

Both the alarm feature and the excellent timekeeping qualities of the clock, together with its moderate cost, are combined in an article that at a short distance would be taken for a high priced chronometer in its case.—CAPT. S. P. MEEK, U. S. A., Philadelphia, Pa.

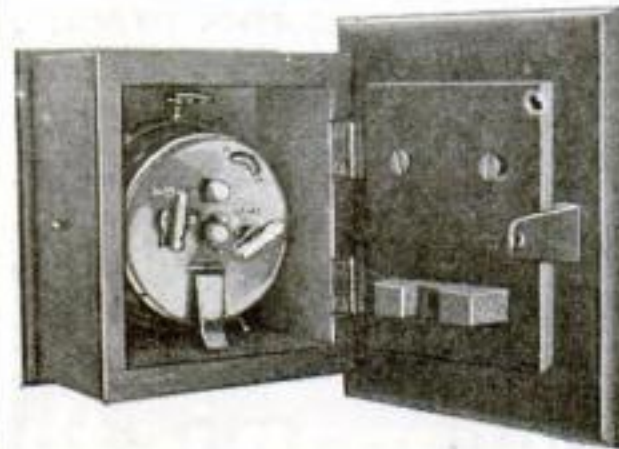

This homemade mahogany case is designed so that the clock may be wound and set easily

## Ornamental Desk Eraser

AN ORNAMENTAL eraser holder can be made from your favorite pocket knife after its ordinary usefulness is over. Remove the rivets, lift out the old or broken blade ends, the springs and the compartment dividers, and fasten a round typewriter eraser at each end.—J. E. N.





Write today for your **FREE** copy of—

# Ward's New Radio Catalogue

**T**HIS advertisement is published to tell you three things everyone interested in Radio *should know*.

That we believe Ward's is today the greatest Radio store in the world—that it is the real Headquarters for Radio.

Second, that at Ward's you can buy everything in Radio without paying the usual "Radio Profits."

Third, that this big 68 page book—a genuine reference book on Radio—is yours free for the asking.

## Our Radio Experts

This Catalogue is a book gotten up by experts. It shows all the best hook-ups, everything in parts and com-

plete sets—so simple that you yourself can easily install them.

And it shows only tested and approved Radio equipment—selected by our Experts who are up-to-the-minute in Radio.


You can just as well have the benefit of our expert knowledge of Radio. Write for Ward's free 68 page Radio Catalogue and see the low prices.

## Our 52 Year Old Policy

In buying Radio from Ward's you are buying from a house whose reliability is above question. For 52 years we have sold quality goods only. Address our house nearest you. Dept. No. 5-R.

## Headquarters for Radio

*Satisfaction guaranteed or your money back.*

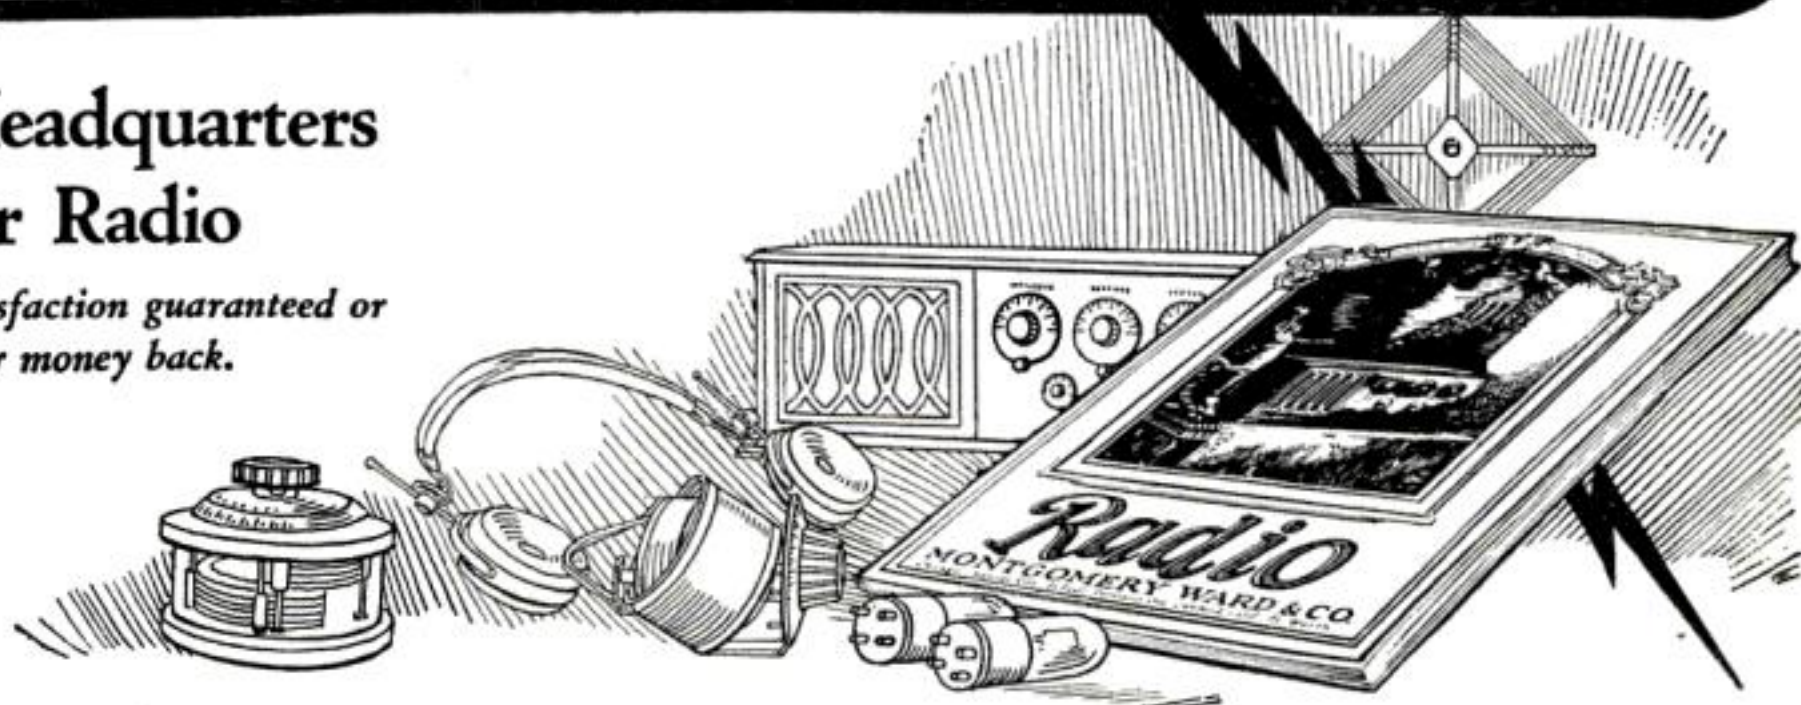

ESTABLISHED 1872  
**Montgomery Ward & Co.**

*The Oldest Mail Order House is Today the Most Progressive*

Chicago

Kansas City

St. Paul


Portland, Ore.

Oakland, Calif.

Fort Worth



# ALL-AMERICAN

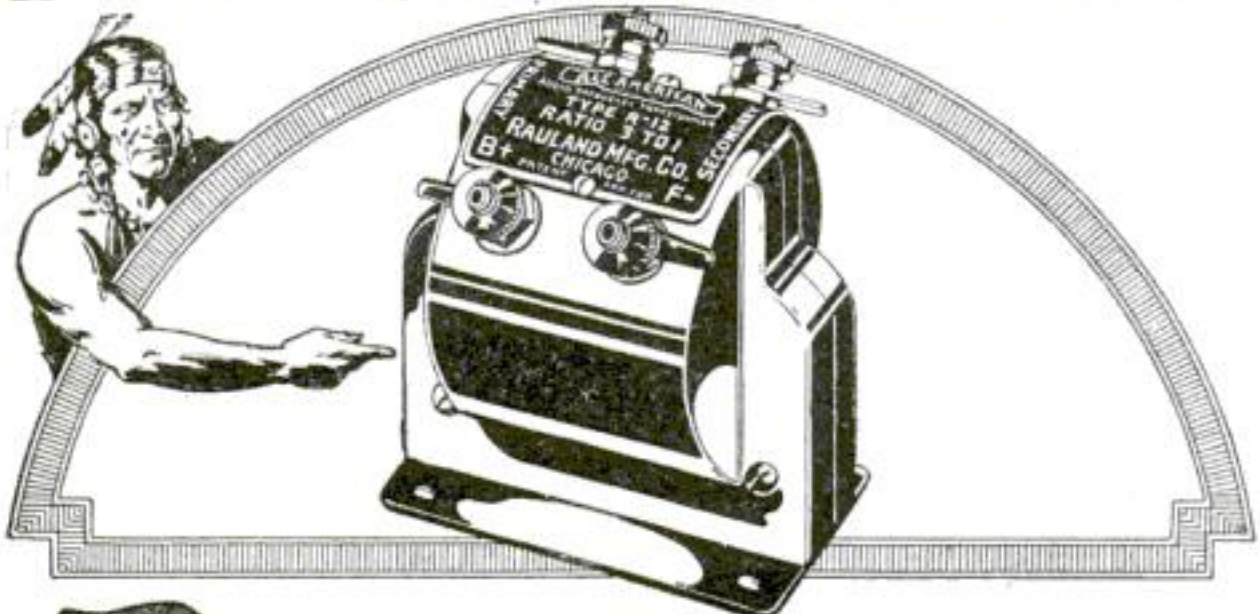

# Reliable!

## Other ALL-AMERICAN Guaranteed Radio Products

**Power Amplifying Transformers (Push-Pull)**  
Input type R-30.....\$6.00  
Output type R-31.....6.00

**Rauland-Lyric**  
A laboratory grade audio transformer for music lovers. R-500.....\$9.00

**Universal Coupler**  
Antenna coupler or tuned r. f. transformer. R-140.....\$4.00

**Self-Tuned R. F. Transformer**  
Wound to suit the tube. R-199 \$5.00. R-201A \$5.00

**Long Wave Transformer (Intermediate Frequency)**  
(15-75 kc.) R-110.....\$6.00

**10,000 Meter (30 kc.) Transformer**  
Tuned type (filter or input). R-120...\$6.00

**Radio Frequency Coupler (Oscillator Coupler).** R-130 \$5.00



**Super-Fine Parts**  
Consisting of three R-110's, one R-120 and one R-130 \$26.00

**The Radio Key Book**  
The most valuable book of radio facts ever published, contains practical helps and tested hook-ups. Sent for 10 cents, coin or stamps.

**RAULAND MANUFACTURING CO.**

PIONEERS IN THE INDUSTRY

2668 Coyne Street

Chicago, U. S. A.


## The Largest Selling Transformers in the World

ALL-AMERICAN Standard Audio Frequency Transformers in any radio receiving set mean but one thing—assured efficiency in amplification. Since 1919 ALL-AMERICAN Audios have answered the demand for an instrument that could be relied upon for maximum amplification and faithful tone reproduction. Set builders who know radio do not experiment—they specify ALL-AMERICANS.

## Precision-Made

ALL-AMERICAN reliability is a natural result of ALL-AMERICAN precision manufacture. Special machinery and testing equipment assist in achieving perfection. When you are buying a new set, look under the lid for ALL-AMERICANS—or install them in your present set if they are not already there. You'll appreciate the difference in amplification. 3 to 1 Ratio, \$4.50. 5 to 1 Ratio, \$4.75. 10 to 1 Ratio, \$4.75.

## All-American Reflex

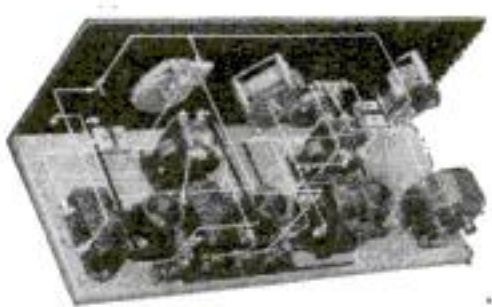

Complete receiving sets, with all instruments mounted on panel and baseboard ready to be wired. Clear photographs, blueprints and a 48-page instruction book make wiring so easy as to be the work of only one delightful evening.

All-Amax Junior is a one-tube set with remarkable selectivity and volume. It tunes out the locals and gets real distance, or it brings in the local stations on the loud speaker.

All-Amax Senior is a three-tube set with three stages of r. f. amplification, crystal detector and two stages of audio. It is highly selective and brings in the far-distant stations on the loud speaker.

All-Amax Junior (semi-finished) . . . . . \$22.00  
All-Amax Senior (semi-finished) . . . . . 42.00

## The Home Workshop

### Tricky Quebec Ski Coaster



THIS tricky coaster seems to be a purely French-Canadian invention, seldom seen outside Quebec Province. It is made of the front half of a ski, usually found among winter equipment in the cellar. Its length will depend upon the size of the user—4 ft. as a rule. The upright is a bit of soft wood about 3 by 4 by 16 in. screwed on through the bottom of the ski about 1 ft. from the back. A piece of smooth board about 14 in. long then is screwed crossways on the top of the upright. A coat of varnish greatly improves the appearance.—EDMUND L. NESBITT, Quebec, Can.


### Small Soldering Copper Useful in Radio Construction



FOR radio work and other small soldering jobs many makeshift soldering coppers are used. Most of them are open to the objection that the tinning burns off too easily. I find this difficulty is overcome by making a copper, as shown above, from a disk about the same diameter as a Canadian penny. The disk is folded along its center over the piece of wire and fastened with a small rivet. The other end of the wire is inserted in a suitable handle. The copper then is pointed, smoothed with a file, and tinned.—W. E.

### Bicycle Spoke Forms Substitute for Jeweler's Screwdriver

FOR tightening the bows of spectacles or the screws that hold a watch movement in the case, or other small screws, it is necessary to use a jeweler's screwdriver. If one of these is not at hand, a substitute may be made from the spoke of a bicycle wheel.

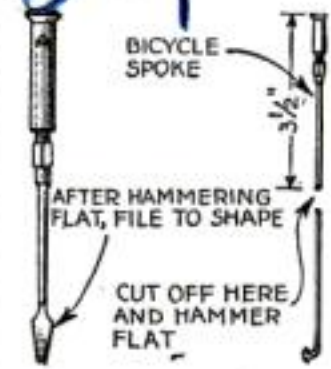

Cut it off as shown, hammer the wire end flat, bevel it back about 3/8 in., then file to the desired shape and size. No heat is necessary, as bicycle spokes are a good grade of steel. — ROY C. BRADBURY, Elizabeth, La.

A screwdriver for minute work



## The Home Workshop

### Comical Boxing Dolls Made of Putty, Lead, and Wire

By Kenneth B. Murray



**BOXING** dolls that are comical in action and certain to cause hilarity in any company of children or grown-ups, can be made quite easily.

A white and a colored boxer, possibly representing

Dempsey and Wills, make a lively and mirth-provoking pair. Because they are made with spring-steel wire, their arms

swing back and forth in a menacing manner for half a minute at a time whenever the two fighters are pushed together.

To make the dolls, you will need putty, lead, spring wire, eyebrow pencil, and



Fig. 1 (above): Inserting springs into the putty



Fig. 2. The features are modeled with a knitting-needle

lipstick. The putty is molded into the shape of the trunks, gloves and heads. The wire should be cut to suitable lengths, bent, and inserted into the putty while the latter is soft (Fig. 1).

To shape the features, use a pointed instrument such as a



Fig. 3. A pair of boxers and four heads colored with lipstick and eyebrow pencil

knitting-needle (Fig. 2). The lipstick and eyebrow pencil are used to give color to the lips, cheeks, hair and eyebrows.

The feet, to keep the figures upright, are made of lead. A chunk of this soft metal can be pounded and squeezed to a suitable shape with hammer and pliers.

Figure 3 shows the completed figures and several types of heads.

# The Drill with the unbreakable Ratchet

**HUSKY**, handy, compact, easy-working, trouble-proof—that's this Goodell-Pratt ratchet hand and breast drill.

The big feature is the perfected, never-fail ratchet mechanism. The strength of the ratchet is due chiefly to the fact that the teeth are broached on the inside of the drop-forged crank hub, then case-hardened. The dogs are of hardened steel and so located that the force is almost entirely compressive—there is almost no shearing action. Ratchet is both right and left hand—operated by turning the knurled ratchet dial.

This drill has two speeds, controlled by turning the shifter knob. Steel spindle runs in ball bearings. Polished hardwood handle, and side handle.

The all-steel chuck has three hardened jaws for holding round shank drills 0 to  $\frac{3}{8}$  inch.

Other tools  
for the home workshop


In the Goodell-Pratt Catalog No. 15 are shown many other essential tools for the mechanic. Write for it.

GOODELL-PRATT COMPANY


GREENFIELD, MASS., U. S. A.

*Toolsmiths*

Makers of Mr. Punch

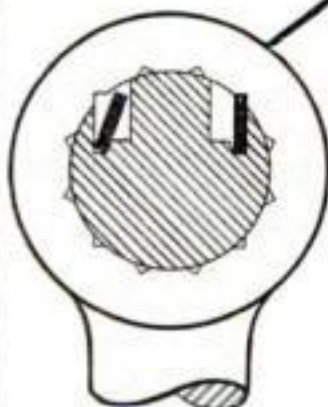


Here is a diagrammatic illustration of the Goodell-Pratt Improved ratchet mechanism patented September 16, 1924. The teeth are broached on the inside of the drop-forged crank hub. The hardened steel dogs are so located that the pressure is almost entirely compressive, rather than shearing.

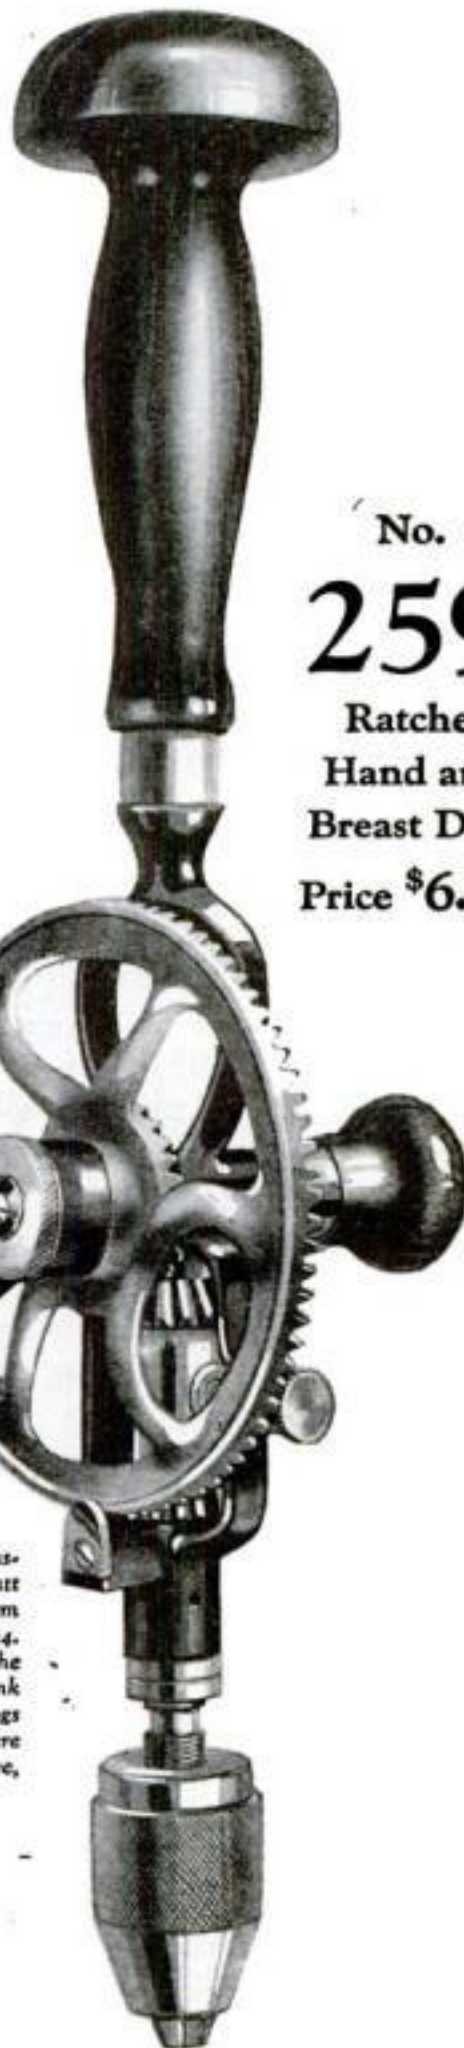

No.  
**259**  
Ratchet  
Hand and  
Breast Drill  
Price \$6.00

**GOODELL-PRATT**  
**1500 GOOD TOOLS**



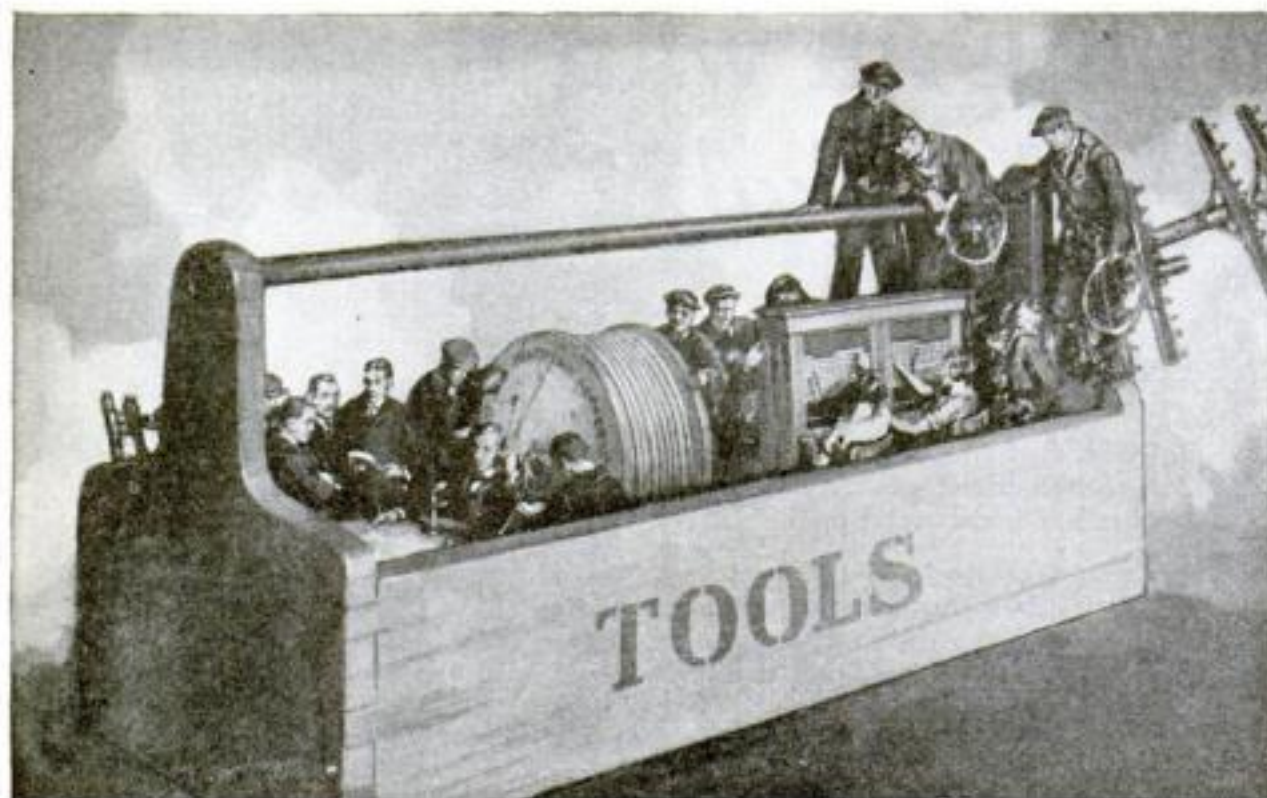

## The tools of national service

The American people lead the world in the efficiency of industry. Who can say what part of their success is due to the superior implements they use. This much we know. They have the world's best telephone system as an instrument of communication, and they use it without parallel among the races of the earth. To this end our telephone service must be equipped with proper tools.

The tools of management. Bell System executives, rising from the ranks of those who know telephony, must share our responsibility to the public, most of whom are telephone users, shareholders or workers.

The tools of service. The national, two-billion-dollar Bell System, handling fifty-eight million telephone calls a day, must be enlarged and extended while in use.

The tools of forecast. We must continue to know the rapid and complex growth of communities and make provision in advance, so that the telephone will be ready when needed.

The tools of supply. The Western Electric Company, our manufacturing and purchasing department, its factories manned by 40,000 workers, assures us that extension of facilities need never be interrupted.

We must have the best tools of finance, of invention, of everything else, in order to continue serving the American people.



AMERICAN TELEPHONE AND TELEGRAPH COMPANY  
AND ASSOCIATED COMPANIES

**BELL SYSTEM**

*One Policy, One System, Universal Service*

**SAVE at factory SALE**

Combination Ranges Save 1-4 to 1-2 on stoves, ranges, furnaces, and household goods during the greatest sale in our 25 years' history. Cash or easy payments—terms as low as \$3 monthly. Money-back guarantee, 24 hours.

**\$59.90 Up**

781 Stove Co., Rochester Ave., Kalamazoo, Mich.

Send for FREE BOOK "A Kalamazoo Direct to You"

**Graham Made \$100. a Week Part Time**

Two previously inexperienced men in widely separated parts of the country make this extra money for themselves only by fast sales and good profit on each sale. Then there is F. Depries, who averages \$7,000 a year, Robert of Va., whose \$500 a month is very different from the \$40 a week he made at a poorly paid clerking job. We have clerks, factory workers, salesmen and others on the Fyr-Fyter sales force cashing in on one of the most lucrative propositions. Fyr-Fyters sell like the proverbial hot cakes. We have a vacancy for you if you have enough ambition and determination to write us. No experience or investment necessary. Address The FYR-FYTER CO., 648 Fyr-Fyter Bldg., Dayton, O.



## The Home Workshop

### How to Make a Simple Clamp for Cylindrical Parts

IN MAKING up some store fixtures for display purposes, the owner of a small sheet-metal shop had to devise a method for adjusting the stands up and down. The standards were of brass tubing and a



A clamp useful for many purposes

setscrew was not practical. The mechanic finally adopted the means illustrated.

He slit the exterior section of the tubing, cut a sleeve from pipe, tapped it for a setscrew and attached it to the tubing with solder at the side opposite the setscrew.

The same method could be used for holding drills when a chuck is not available, or in connection with a tool handle for miscellaneous uses.

### Extra Water Pan Improves "Pipeless" Heating Plant

IN A hot-air heating system, especially the pipeless type, the usual water pan seldom supplies sufficient moisture. Realizing this, the writer tried out various schemes for increasing the moisture in the heated air. The method eventually adopted gives a maximum of moisture and the water pan is filled without going down cellar.

The humidifier can be installed quickly by any one handy with plumber's tools. It will prove a paying investment in better living conditions and reduced fuel expense, because a high humidity means that less heat is required to keep warm.

Lift the center of the floor register so the heat radiator of the furnace is exposed. With an iron strap fasten a good-sized water pan over the center of the radiator by means of machine screws. These can be threaded into holes tapped in the top of the register. Placing a bit of furnace cement on the screw before threading it in will check any possible escape of gas.



An extra large furnace humidifier

Next, cut two small holes through the two casings of the furnace, close under the floor. Attach a  $\frac{1}{8}$ -in. pipe to the main water pipe, run it through the casing and lead it down to the pan as shown, by means of elbows and short lengths. Insert a valve in the line at a point where a turning rod can be brought conveniently through the floor and operated from above. Be sure and provide a key or other safeguard so the valve cannot be turned on accidentally and the furnace pit flooded. The pan can be watched during filling by looking down through the floor register.—L. R.




## The Home Workshop

### Clamp Holds Voltammeter on Face of Radio Panel

IF YOU use a voltammeter in connection with your radio set, you can keep it handy by mounting it on the panel as shown below.

271399  
Cut out the clamp with tinne's snips from 1/16-in. sheet brass and drill the center hole, countersinking it to take a flat-head machine screw. Bend the arms

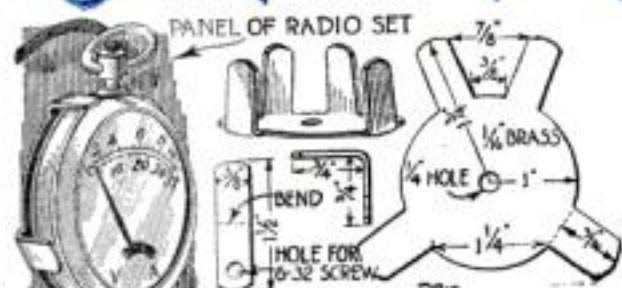


Pocket voltammeter on radio panel and details of the holder

so as to grip the voltammeter and fasten the holder to the panel wherever convenient.

Two binding posts and two small angles are used for making contact with the volt and ampere terminals; the third binding post, which is common to both sides of the meter, is connected behind the panel with the screw that holds the clamp.—PHILIPPE A. JUDD, Portsmouth, Ohio.

### Light, Handy Nail Box Made from Old Tobacco Tins

MADE from empty 1/2-lb. tobacco tins with rolled edges, the combination nail box illustrated is a handy and time-saving container for the home workshop. It is useful also for carpenters, especially finishers on trim and interior wood-work.

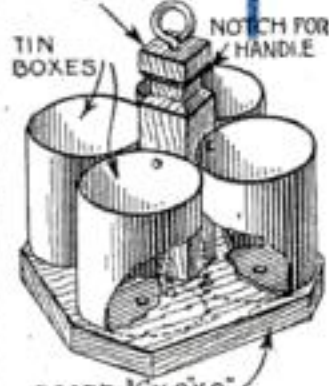

An aid in keeping nails sorted

The baseboard is nailed to the handle stick, as shown, and the tins are nailed or screwed to the base. A nail through the top of each tin into the handle further reinforces the construction.

Several of these containers may be made, or more


than four tins can be placed on a single base if preferred. Provide a convenient place to hang up the nail boxes when not in use and don't leave them out in the rain.—R. M. REKERT, Regina, Sask., Canada.

### Fitting Tool Handles Quickly with a Grinding Wheel

MUCH laborious whittling and shaving on hardwood handles can be avoided and a snug fit easily obtained by cutting down the handle to size on a coarse grinding wheel. This method seems to be little known, judging from the number of men who use a slower method.

## Mechanics Know They Measure Closer With a BROWN & SHARPE —Accurate Graduations—

Examine a Brown & Sharpe Micrometer. Notice how accurately the graduations on the thimble line up with those on the barrel. Turn the thimble. See how easily and accurately the clean cut graduations can be read. Or study a Brown & Sharpe Vernier or Protractor,—the excellence of its graduations is instantly apparent,—visible evidence of the superior workmanship which goes into all Brown & Sharpe Tools.

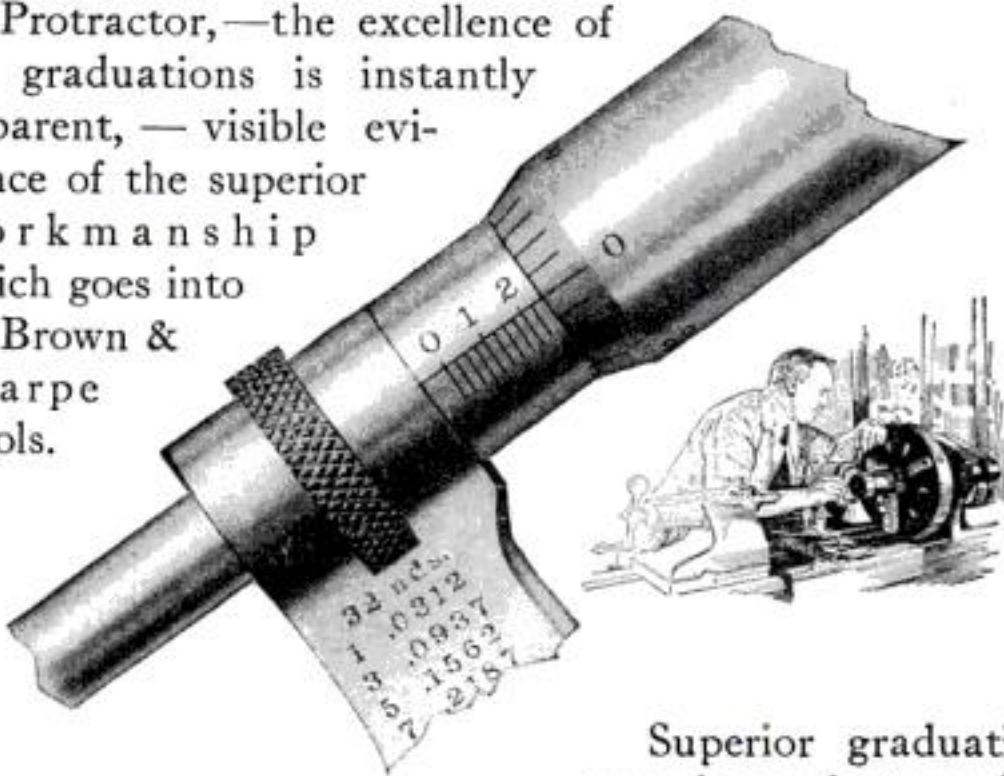

Superior graduations are only one feature of the mechanical excellence of Brown & Sharpe Tools,—a real excellence which makes them do better work for the man who owns them.


You ought to have Brown & Sharpe Small Tool Catalog No. 29 which lists over 2,000 of the best tools you can buy. It's sent free to any address.

**Brown & Sharpe Mfg. Co.,**  
Providence, R. I., U. S. A.

©

**BROWN & SHARPE TOOLS**  
"Standard of the Mechanical World"



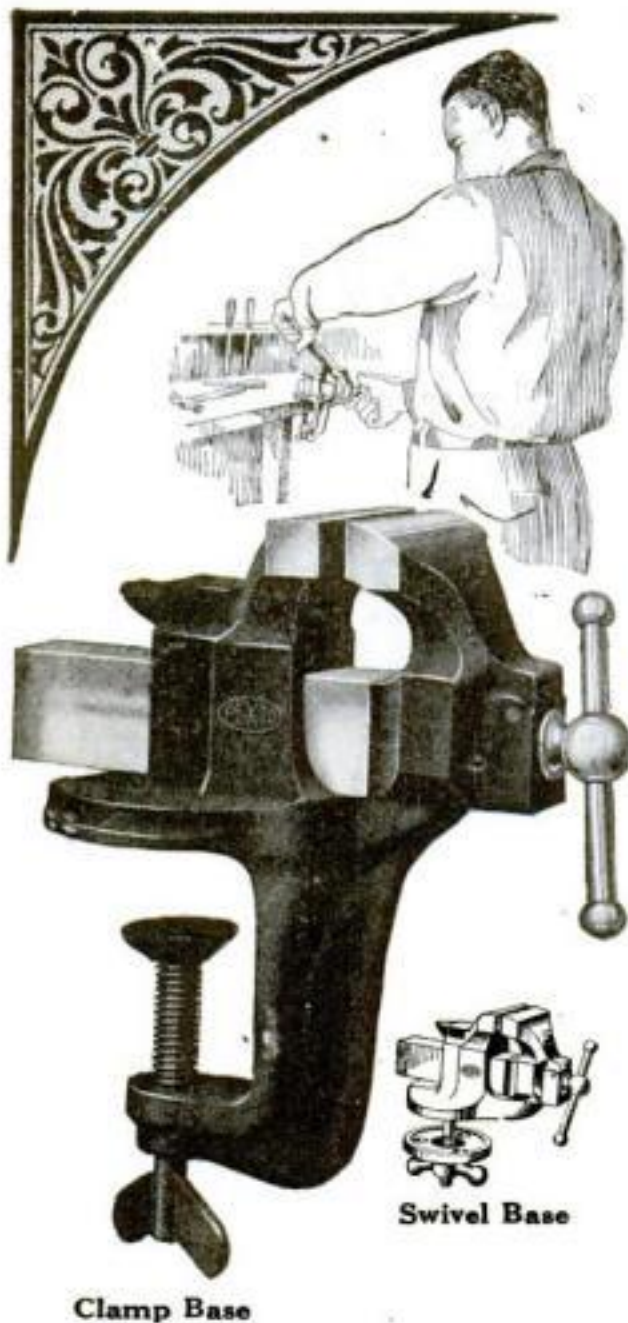

ASK your hardware dealer to show you these new Pexto Bench Vises—they have new patented construction and are made from new patterns thruout.

These Pexto Vises are made in sizes  $1\frac{1}{2}$ " to 3" jaws, with clamp or swivel base, iron or steel faced jaws—in fact you will find just the style and size to meet your requirements. They are attractively finished in gray with polished jaws and anvil.

Your dealer can show you these Vises along with other Pexto Mechanics' Hand Tools—tools that you need in the home or garage—such as Braces, Bits, Hammers, Hatchets, Pliers, Wrenches, Chisels, Draw Knives, Snips, etc.

Another thing—you can't go wrong on Pexto Tools as they are backed by a century of tool making experience and are a combination of skillful workmanship and materials of quality.



**Worth While Tools**

PECK STOW & WILCOX CO.  
SOUTHINGTON, CONN.



## The Home Workshop

### Building an Aerial Mast that Requires No Guy Wires

THE radio fan often can improve the volume and range of his receiving set to the equivalent of one or two additional tubes by constructing a fairly high outside aerial.

The only problem to be solved is in the erection of a neat, strong mast for supporting the far end of the antenna; the near end can be fastened to the house.

One of the best masts is that illustrated. Although 23 ft. high, it is easy to build, costs little for materials, requires no guy wires, and is much more workmanlike in appearance as well as cheaper than a solid wooden pole of similar height. The fact that it resembles in appearance the steel

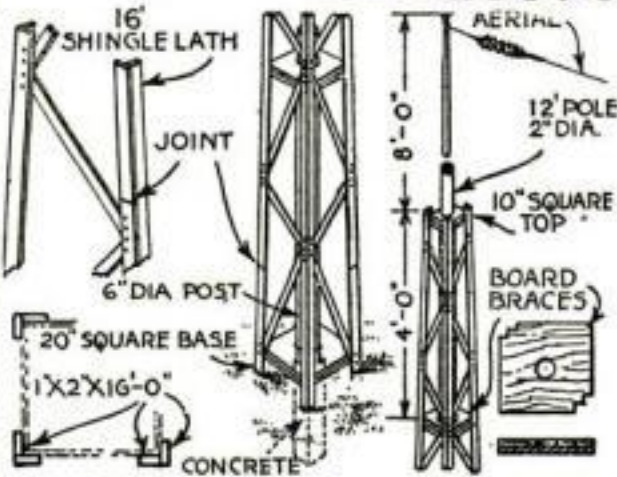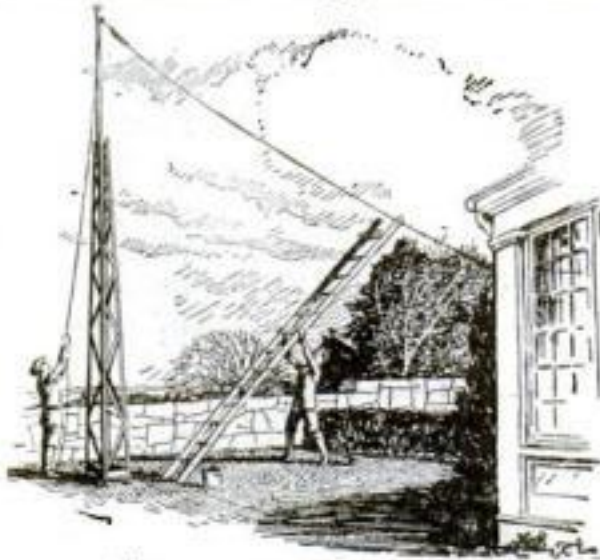

Rough spruce shingle laths, 16 ft. long, are used in constructing this rigid antenna pole

work commonly used for supporting the aerials of broadcasting stations is another point in its favor; it is distinctively a radio mast.

To build it requires 20 pieces (two bundles) of 1 by 2 in. by 16 ft. rough, common wood (tough spruce shingle lath preferred); a few odd boards  $\frac{3}{8}$  in. thick; one stock flagpole about 2 in. in diameter at the base and 12 ft. long; one stock 6-in. fence or laundry post about 10 ft. long, of chestnut or other wood that will not rot readily in the ground; 3 lb. eight-penny common nails, bottle-green paint sufficient for two coats, one small galvanized iron pulley (if the flagpole is not equipped with a good pulley) and 50 ft. of sash cord.

On a sidewalk, floor, or level ground lay one 16-ft. shingle lath, and butt up against the end of it a piece 4 ft. long, skew-nailing the two together temporarily. This is to form one side of a sort of ladder that is to be 20 in. wide at the bottom and 10 in. wide at the top. For

(Continued on page 121)



EVERYWHERE about the home—from cellar to attic, from kitchen to garage—you will find need of a good Slip Joint Plier.

There is a style of Slip Joint Plier in the extensive Pexto line to meet your requirements—ask your dealer to show them to you—twenty styles in all and all practical sizes of each style. They are drop forged steel, carefully finished and can be had either Nickel Plated or Blued finish.

All Pexto Tools are backed by a century of tool making experience. The line consists of Bit Braces, Hammers, Chisels, Screw Drivers, Hatchets, Snips, Squares, Wrenches, Pliers, and many other small tools and it is easy to procure Pexto Tools as they are carried by practically all progressive dealers.

Ask for Plier Booklet.



**Worth While Tools**

PECK STOW & WILCOX CO.  
SOUTHINGTON, CONN.



## The Home Workshop

### Building an Aerial Mast

(Continued from page 120)

the other side of the ladder use two similar pieces, but put the 4-ft. length at the opposite end from the one on the ladder leg already made.

About 1 in. from the bottom nail a 4-in. batten (or two laths) at right angles to the center line. Cut the first diagonal brace about 3 ft. long, sawing the ends at the correct bevel and making both ends alike. Lay this brace on the frame at the bottom, keeping it back from the edges  $\frac{3}{8}$  or 1 in., according to the thickness of the wood. Do not nail this, but mark and cut the next one, maintaining the same bevel cut. Lay this in position and continue until all the pieces are cut.

If the same bevel is maintained, it will be found that each piece will be shorter than the preceding one. Before nailing these in place, mark three more sets. Two eightpenny nails at each end of each brace will be amply strong enough if the nails are well clinched.

All four frames are made exactly alike with the exception that the diagonals start from left to right on two of them and from right to left on the others. In other words, they are made in pairs. Nail three sides together on the ground, overlapping only one corner of each side, so that the mast will come square.

**C**UT from a  $\frac{3}{4}$ -in. board two pieces 9 in. square and nail them together so that the grain of one crosses that of the other. Fit the square in place at the top of the mast, cutting out two diagonally opposite corners to allow for the ends of the top braces. Then bore the piece to suit the flagpole and fasten it about 3 in. below the top of the mast.

Make a similar two-ply piece 11 in. square to fit within the sides of the mast about 4 ft. from the top. Only the upper of the two boards in this case should be bored for the flagpole, thus forming a socket or cup. Set the pole in place and fasten with a lag screw through the bottom board, but be careful not to split the pole. Also attach the pulley and line. It will save time to paint the mast before erecting it.

Set the heavy 10-ft. fence or laundry post in the ground, preferably with cement. Then you may erect the three-sided mast around the post, seeing that it stands quite plumb. Nail short braces from the four corners of the mast to the post near the top of the latter; do the same at the bottom. Also make a shelf at the bottom upon which heavy stones may later be piled for added security. The last side then may be raised and nailed in place.

The mast, if properly built, will stand firmly enough to allow a ladder to be placed against it, so that it can be repainted whenever necessary. Wedges should be used to tighten the flagpole where it passes through the top of the mast.

Incidentally, the aerial can be lowered and a flag raised upon occasion. It is also possible to use the mast for supporting a long pulley clothesline, as the construction is astonishingly rigid.—A. E. E.



It is a significant fact that organizations that depend upon cutting tools most, invariably turn to Simonds—first, for saw engineering service and for general saw information and, finally, for the saws themselves. All Simonds saws are made from steel produced in Simonds plants from an exclu-

sive formula. Bring *YOUR* saw problems to Cutting Tool Headquarters.

*Simonds produces solid or inserted metal tooth cutting saws, slitting and slotting saws—made with any standard style tooth to fit any machine.*

# SIMONDS

Pronounced SI-MONDS

## SAWS FILES KNIVES STEEL

### SIMONDS SAW AND STEEL COMPANY

Fitchburg, Mass.

"The Saw Makers"

Established 1832

Branch Offices in Principal Cities





# A new Tungar!

The new Tungar does all the old Tungar did—and more. It will charge both radio A and B batteries, with no change except slipping the wire from one terminal to another. It charges 2, 4 or 6 volt A batteries—24 to 96 volt B batteries—and auto batteries, too.

It is simpler than ever to use. Just two clips and a plug. No need to disconnect your battery from your set, or make any change in the wiring. The Tungar charges overnight while you sleep. And it makes no disturbing noise.

It is more compact than ever. It has a new bulb, unchanged in principle, but more convenient in size and use. G-E research has made a good product better!

Keep your batteries charged with a Tungar—and get the most out of radio.



**300,000  
Tungars  
already  
in use!**

The new Tungar charges both radio A and B batteries, and auto batteries, too. Two ampere size (East of the Rockies) \$18

The Tungar is also available in five ampere size (East of the Rockies). \$28

60 cycles—110 volts

## Tungar

REG. U. S. PAT. OFF.

### BATTERY CHARGER

*Tungar—a registered trademark—is found only on the genuine. Look for it on the name plate.*

Merchandise Department,  
General Electric Company,  
Bridgeport, Conn.

# GENERAL ELECTRIC

**Start a Movie Show**

SMALL CAPITAL STARTS YOU  
Big opportunity to become independent. No experience needed. We show you how. Our easy payment plan makes it easy to start. We equip you complete. Our machines used and endorsed by government institutions. Write today for free catalog.

ATLAS MOVING PICTURE CO.  
586 S. Dearborn St., Dept. 11, Chicago

**A Gerstner CHEST**  
is valuable to  
**MACHINISTS and  
TOOLMAKERS**

Saves its cost many times in value of tools it saves from loss and damage. Write for free catalog.

H. GERSTNER & SONS  
514 Columbia St., Dayton, O.

**21 Jewels**  
Nothing less than 21 Ruby and Sapphire Jewels is good enough for Burlington masterpiece.

**Quality and Style**  
Adjusted to the second—temperature—Ischronism—positions. 25 year Gold Strata Case, in 100 designs. \$1 down. Balance in small monthly payments. Send for free book.

**Burlington** Watch Company  
19th Street and Marshall Blvd.  
Dept. 13-62 Chicago, Illinois

**"WONDER" COLD PIPE,  
TUBING & BAR BENDERS**  
HAND and MOTOR OPERATED

14 Sizes of Machines  
What it costs to bend pipe our way. Per bend.  
1" pipe 5 cents 4" pipe 25 cents  
2" pipe 10 cents 6" pipe 60 cents  
3" pipe 15 cents 8" pipe \$1.00  
Send for Catalogue.

**AMERICAN PIPE BENDING MACHINE CO.**  
51 Pearl St. Boston, Mass.

## The Home Workshop

### Removable Seat Cushions

(Continued from page 96)

the stuffing into place. The reason is the same as that for tying a quilt, only with a thick cushion such as we have made, we cannot take a stitch clear through. Besides, we need more strength, so we use tufting buttons, as in Fig. 7.

You may have any number of buttons you choose and locate them as you desire. Regular tufting twine or strong fishline should be used. Thread a long needle and force it through the cushion so that it comes through at a corresponding point on the opposite side. Run the thread through the eye of the tufting button and return your needle through the same holes you used before. Now thread on another button and remove your needle.

In order to draw the buttons together as shown in Fig. 7, a special knot must be tied. Figure 12 shows the method. The purpose is to form a slip knot that will allow you to draw the buttons up snugly to the covering on both surfaces.

How your twine will look when you are ready to tie the knot is shown at A. The short end is held in the left hand, the long end in the palm of the right hand, with the index finger reaching out to grasp or hook this strand. This strand is shown at B drawn under the first and an upward turn begun; C shows this turn completed, the loop being drawn over the top and to the left of the short end, which still is held in the left hand.

Now take this left end, move over the two strands and come up through the triangle already formed. Notice D. The loop held by the right index finger is released. Still holding the short end, slide the knot thus formed into place and draw the buttons together. When this is done, a sharp pull on the short strand will draw out the knot in such a manner as to make a secure job. A common square knot is then tied around the shank of the button and the ends of the twine are trimmed off short enough so as not to show beyond the edge of the button.

If you use buttons with a cloth shank, it will be necessary to stitch through this instead of through the eye of a hard button as described. The knot is tied in the same manner.

In making a wedge cushion, it is well to cut out the front, back, and end all in one long piece. Cut the triangular ends separately and do the stuffing from the narrow edge.

### Starting a Cold Engine

ANY one who has had the experience of cranking a Ford motor for half an hour or more when the thermometer is around zero should make a practice of leaving the emergency brake lever down in running position at night. This squeezes out all oil between the bands and the drums and prevents any from getting in until the motor is started again. In the morning draw the brake lever back in starting position and the motor will be found to turn over very much easier, because of the absence of congealed oil between the bands and the drums.—H. W.



## The Home Workshop

### Beautiful Chest Easily Made

(Continued from page 94)

- B End of frame under top (mitered),  $\frac{3}{8}$  by  $2\frac{1}{2}$  by  $21\frac{1}{2}$ , 2 required.  
 C Front of frame under top (mitered),  $\frac{3}{8}$  by  $2\frac{1}{2}$  by 41, 1 required.  
 D Back of frame under top,  $\frac{3}{8}$  by  $1\frac{3}{4}$  by 36, whitewood, 1 required.  
 E Ends of case,  $\frac{3}{8}$  by  $20\frac{1}{2}$  by  $30\frac{1}{4}$ , plywood, 2 required.  
 F Front stiles,  $\frac{3}{8}$  by  $2\frac{1}{2}$  by  $30\frac{1}{4}$ , 2 required.  
 G Top front fillings,  $\frac{3}{8}$  by  $\frac{3}{8}$  by  $1\frac{1}{2}$ , 2 required.  
 H Bottom front fillings,  $\frac{3}{8}$  by  $\frac{3}{8}$  by  $3\frac{1}{4}$ , 2 required.  
 I Quarter turnings (stock design),  $\frac{3}{8}$  by  $\frac{3}{8}$  by  $1\frac{1}{16}$ , 4 required.  
 J Quarter round moldings,  $\frac{3}{8}$  by  $\frac{3}{8}$  by  $23\frac{3}{4}$ , 2 required.  
 K Drawer rails,  $\frac{3}{8}$  by  $2\frac{1}{2}$  by  $36\frac{1}{2}$ , 4 required.  
 L Drawer-top division,  $\frac{3}{8}$  by  $1\frac{1}{2}$  by 6, 1 required.  
 M Top-drawer fronts,  $\frac{3}{8}$  by 6 by  $17\frac{1}{2}$ , plywood, 2 required.  
 N Second-drawer front,  $\frac{3}{8}$  by 6 by  $36\frac{1}{2}$ , plywood, 1 required.  
 O Third- and fourth-drawer fronts,  $\frac{3}{8}$  by 7 by  $36\frac{1}{2}$ , plywood, 2 required.  
 P Drawer-front backings (used with O),  $\frac{1}{2}$  by 7 by  $35\frac{1}{2}$ , whitewood, 2 required.  
 Q Drawer-front backing (used with N),  $\frac{1}{2}$  by 6 by  $35\frac{1}{2}$ , whitewood, 1 required.  
 R Drawer-front backings (used with M),  $\frac{1}{2}$  by 6 by  $16\frac{1}{2}$ , whitewood, 2 required.  
 S Third- and fourth-drawer sides,  $\frac{1}{2}$  by 7 by 18, whitewood, 4 required.  
 T Top- and second-drawer sides,  $\frac{1}{2}$  by 6 by 18, whitewood, 6 required.  
 U Third- and fourth-drawer backs,  $\frac{1}{2}$  by  $6\frac{1}{2}$  by  $35\frac{1}{2}$ , whitewood, 2 required.  
 V Second-drawer back,  $\frac{1}{2}$  by  $5\frac{1}{2}$  by  $35\frac{1}{2}$ , whitewood, 1 required.  
 W Top-drawer backs,  $\frac{1}{2}$  by  $5\frac{1}{2}$  by  $16\frac{1}{2}$ , whitewood, 2 required.  
 X Second-, third-, and fourth-drawer bottoms,  $\frac{1}{4}$  by 18 by  $35\frac{1}{2}$ , plywood, 3 required.  
 Y Top-drawer bottoms,  $\frac{1}{2}$  by 18 by  $16\frac{1}{2}$ , plywood, 2 required.  
 Z Back of case,  $\frac{3}{8}$  by  $38\frac{1}{4}$  by  $31\frac{1}{4}$ , plywood, 1 required.  
 AA Drawer runners,  $\frac{3}{4}$  by  $1\frac{1}{2}$  by  $18\frac{1}{2}$ , poplar (or other inexpensive wood), 10 required.  
 BB Drawer guides,  $\frac{1}{2}$  by  $\frac{3}{4}$  by  $18\frac{1}{2}$ , poplar, 10 required.  
 CC Center division between top drawers,  $\frac{3}{8}$  by 6 by  $19\frac{3}{4}$  (or 18 or thereabouts), poplar, 1 required.  
 DD Division under CC,  $\frac{3}{8}$  by  $2\frac{1}{2}$  by  $19\frac{3}{4}$ , poplar, 1 required.  
 EE Base front, mitered,  $\frac{1}{4}$  by  $1\frac{3}{4}$  by  $40\frac{1}{2}$ , 1 required.  
 FF Base ends, mitered,  $\frac{1}{4}$  by  $1\frac{3}{4}$  by  $21\frac{1}{4}$ , 2 required.  
 GG Feet (stock design), 4 in. long, 4 required.  
 HH Filling for all drawers,  $\frac{3}{8}$  by  $\frac{3}{8}$  by 36, whitewood, 12 required.  
 II Filling molding, quarter round,  $\frac{3}{8}$  by  $\frac{3}{8}$  by 36, whitewood, 12 required.  
 JJ Dowels or double-end screws for feet,  $5/16$  by 3, 4 required.  
 KK Drawer-back strips,  $\frac{1}{2}$  by  $\frac{1}{2}$  by 6, poplar, 10 required.  
 Antique handles,  $2\frac{1}{2}$  by  $3\frac{3}{4}$ , brass, 8 required (or glass knobs).  
 Escutcheons, brass, 3 required.  
 Locks,  $\frac{3}{4}$  to center, 3 required (if wanted).  
 Screws and nails; best glue.

**P**LYWOOD or veneered stock is used so widely now and is such a desirable material for the amateur craftsman that it will pay you to make every effort to obtain it for use where specified in this list. If, however, you cannot get it, or the price seems unreasonably high, you can substitute solid stock for the top, ends and drawer fronts, and tongued-and-grooved stock of any available kind for the back.

Lacking plywood for the top, you will find that you cannot get a single board wide enough to make the top in one piece. If your lumber dealer operates a planing mill, you will be able to have the top glued up and cut to size for you. This will save considerable work and be well worth while.

You can, however, do the same work yourself without much trouble. Match two or three of your best pieces to make the top and bore into the joining edges for about six  $\frac{3}{8}$ -in. dowels. Run a plane over the dowels so there will be a narrow

(Continued on page 124)

10 Shaves Free  
Send Coupon



## We've Won Millions

*to this unique shaving cream;  
please try it—5 new joys await you*

### GENTLEMEN:

Palmolive Shaving Cream is a national sensation. Men have flocked to it by the millions.

80% of its users once were wedded to other shaving creams. Only outstanding and superlative advantages could have won them over.

### 60 years of mastery

We are experts in soap-making. For 60 years we have been improving soap.

We asked 1000 men what they most desired in shaving lather. We spent 18 months in modern laboratory work. 130 formulas were discarded before we found the right one.

Then we offered men a test. And that test changed the shaving cream situation; made a new leader in the field.

### Find out—please

Palmolive Shaving Cream may or may not meet your ideals.

So in fairness both to you and us, won't you put your present cream aside a few days and give Palmolive Shaving Cream a trial? Simply mail the coupon.

We'll thank you for the courtesy, and you'll thank us, we believe, for the new conception of shaving comfort that it brings.

### Five remarkable results

**5**  
delights

- 1 Multiplies itself in lather 250 times.
- 2 Softens the beard in one minute.
- 3 Maintains its creamy fullness 10 minutes on the face.
- 4 Strong bubbles hold the hairs erect for cutting.
- 5 Fine after-effects, due to the palm and olive oil content.

To add the final touch to shaving luxury, we have created Palmolive After Shaving Talc—especially for men. Doesn't show. Leaves the skin smooth and fresh, and gives that well groomed look. We send a sample free with the tube of Shaving Cream.

THE PALMOLIVE COMPANY (Del. Corp.) Chicago, Ill.

## PALMOLIVE SHAVING CREAM



**10 SHAVES FREE**  
and a can of Palmolive After Shaving Talc

Simply insert your name and address and mail to Dept. B943, Address for residents of Wisconsin, The Palmolive Company (Wis. Corp.), Milwaukee, Wis., Address for residents other than Wisconsin, The Palmolive Company (Del. Corp.), 3702 Iron St., Chicago, Ill.



# Electrical Energy

## Columbia

EVEREADY

## Dry Batteries

—they last longer



for—

gas engine ignition  
telephone and  
telegraph  
doorbells  
buzzers  
motor boat  
ignition  
heat regulators  
tractor ignition  
starting Fords  
ringing burglar  
alarms  
protecting bank  
vaults  
electric clocks  
calling Pullman  
porters  
firing blasts  
lighting tents and  
outbuildings  
running toys  
radio "A"

Don't just ask for "a dry cell." Ask for Columbia Eveready Dry Batteries by name and get 100% battery efficiency. Columbia Eveready Dry Batteries are sold by electrical, hardware and auto accessory shops, marine supply dealers, radio and implement dealers, garages and general stores. Columbia Eveready Ignitors can be purchased equipped with Fahnestock spring clip binding posts at no extra cost to you.

COLUMBIA Evereadys furnish power and pep for a thousand and one tasks. Everything from workaday tasks like ringing the doorbell and starting the Ford, to running toys for the children and providing current for inventors and experimenters.

For more than thirty years Columbia Evereadys have been known for their abundance of electrical energy. They are better than ever—they last longer.

Manufactured and guaranteed by

**NATIONAL CARBON COMPANY, INC.**  
New York San Francisco

Canadian National Carbon Co., Limited, Toronto, Ontario




### Tool Cases

for Machinists, Carpenters and Tool Makers; none better; thirty styles. Quartered oak and metal covered. Ask for booklet.

"Built for Service"

The Pilliod Lumber Co., Swanton, Ohio



### Files Without Motor

The GETTINS OCTOPLANE  
Altitude Record 2020 Ft.  
Glide Record 5148 Ft.

Book giving detailed instructions and license under Pat. No. 1439252 enabling anyone to build one of these wonderful gliders 5 feet long, and information about contest in which you may win a silver cup, sent postpaid for 54 cents. Send for it today.

EDWIN G. GETTINS  
Aero-Mechanical Engineer,  
617 E. 107th St., Los Angeles, Calif.

### RADIO SETS — AUTO BODIES

SEND FOR THE INTERNATIONAL CATALOG



Our net price list. Full line of Radio Sets; and auto bodies for Fords at Wholesale Prices. Save big money by buying Direct from Factory.  
International Body Works, 914 W. Ohio St., Dept. 6, Chicago, Ill.

## The Home Workshop

### Beautiful Chest Easily Made

(Continued from page 123)

flat side on each to allow the glue and air to escape when the boards are forced together. Be sure not to have the dowels too long; they should be at least  $\frac{1}{8}$  in. shorter than the total depth of the holes on each side of the joints. Apply hot glue or first-class liquid glue warmed in a dish of hot water to the dowel holes and edges and force the pieces together between strips nailed on the bench or the workshop floor. Use wooden wedges to exert pressure. If you have regular cabinet clamps, so much the better.

YOU will have no difficulty in obtaining the quarter-round molding for the front corners of the case. The little turnings at the top and bottom are stock designs, but if you cannot obtain them or have them made specially, get turnings from a discarded piece of furniture or a new stair-baluster, or anything that you can adapt for use as the cap and base for the quarter-round pilasters.

The same suggestions apply to the feet. They are a stock design, but if you cannot buy them, get feet from a discarded piece of furniture; inquire at your local cabinet-maker's, in case he may have something to serve your purpose, or glue up blocks of the right size and carve them out yourself. If some of the chisel marks show and if the four feet do not match exactly—if they are not as perfect as machine carvings—it is just as well. From the viewpoint of the furniture connoisseur, they will be all the more attractive.

In other words, to build even so simple a piece as this requires a certain amount of ingenuity and perseverance, but that is half the fun.

To understand the construction, simply imagine the case with the drawers, the ends and the quarter-round ornaments all removed. You have left a framework made mainly of strips  $\frac{3}{8}$  by  $2\frac{1}{2}$  in., held together with glue and nails. If you cannot get a large sheet of 3- or 5-ply veneer for the back, you will have to strengthen the frame by adding back members, to which the back boards can be fastened.

AFTER the framework is complete, the end pieces are screwed on from the inside. The quarter-round pilasters then are glued in place.

A frame mitered at the front corners is made for the top of the case. To this frame the top proper is fastened by means of screws from underneath. All these details are made clear in the working drawings on page 94.

If the chest is too large for the room in which it is to be used, or if the available wall space is not quite wide enough, you can modify any of the dimensions to suit.


The chest may be finished to match other furniture, or in any way desired. A good method is to stain the wood and fill it with a paste filler of first-class quality. Give it a very thin coat of shellac and then follow with three or four coats of shellac very little thicker than the first wash coat. Each coat should be rubbed

(Continued on page 125)



## The Home Workshop

### Old Inner Tube Used to Dress Farm Machinery Belts

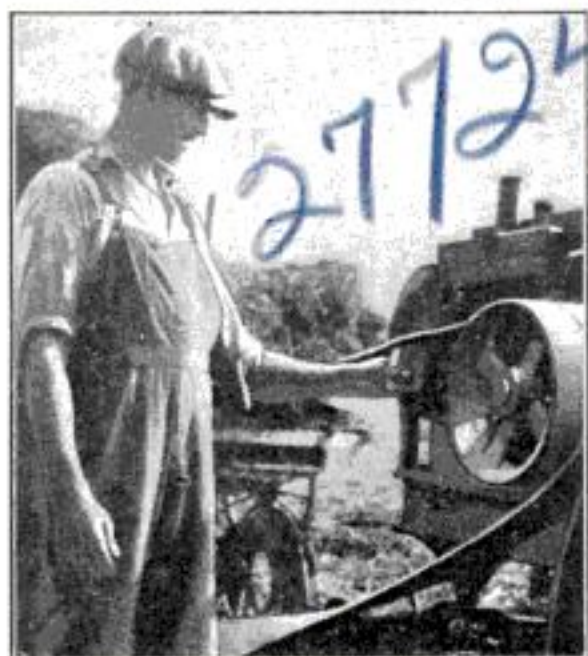

**T**O DRESS farm machinery belts, an Iowa farmer folds a piece of inner tube, heats it at the tractor exhaust until it is soft, and rubs the melted end on the under side of the belts.—F. L. CLARK.

### Beautiful Chest Easily Made

(Continued from page 124)

lightly with pumice-stone and oil, or with very fine sandpaper (00 or finer), moistened with oil. You can obtain a so-called "wet" sandpaper that is especially good for this purpose. Finish with several coats of furniture wax applied thin and rubbed in vigorously.

A word might be added on concealing blemishes. Even in furniture factories it is often necessary to hide defects in the wood and repair mishaps. The amateur almost always has to do some "doctoring" to his work, but unfortunately does not know how to do it successfully.

In the first place, cracks and holes always can be filled with fine sawdust or wood file dust mixed with thin glue. Better than this, however, is a prepared wood paste now on the market which can be squeezed into any holes or shallow depressions, and even molded to replace broken edges of carvings or moldings. When dry, it may be sandpapered, planed, cut, or even nailed into, just like wood, and it finishes like wood.

During the course of finishing and afterward, it is possible to conceal many kinds of damages with stick shellac, applied with a warm soldering iron or old chisel. Stick shellac can be obtained at any large paint store in colors, both transparent and opaque, to match any kind of finish.

It would be quite possible, of course, to make this chest of drawers of a relatively soft wood, such as whitewood, and paint it. In that case, glass knobs might be used instead of antique pulls. Any holes and cracks may be filled with putty after the priming coat is on. White lead putty is preferable to ordinary whiting putty. You can make some yourself when necessary simply by buying 10 cents' worth of powdered white lead at the paint store and mixing it with ordinary putty and boiled linseed oil to the consistency desired.

## Type 6-D Broadcast Receiver

*Non-oscillating ~ Non-radiating*

**I**N dollar-for-dollar value, the 6-D Receiver leads the field.

This remarkable Receiver excels in every phase of performance—purity of tone, sharpness of tuning, range, volume and ease of operation.

You can pay more, but you cannot buy better reception. By all means, examine the 6-D before making a final selection.

**Price \$125.00**

without accessories

EISEMANN MAGNETO CORPORATION

165 Broadway, New York

DETROIT

SAN FRANCISCO

CHICAGO

### SPECIFICATIONS

**Circuit:** Two stages of tuned radio frequency amplification, detector and two stages of audio frequency amplification. Non-oscillating.

**Tubes:** Five in all. Jacks provided for either five or four tube operation.

**Batteries:** Either storage or dry-cells.

**Cables:** Complete set supplied for "A" and "B" batteries.

**Wave length:** 200 to 600 meters, with uniform efficiency of reception.

**Aerial:** 75 to 125 feet, single wire.

**Panel:** Aluminum, with attractive crystal black finish. A perfect body capacity shield.

**Dials:** Sunken design. Shaped to fit the hand and permit a natural position in tuning.


**Condensers:** Single bearing, low leakage losses.

**Sockets:** Suspended on cushion springs which absorb vibrations.

**Cabinet:** Mahogany, with distinctive lines and high finish. Ample space provided for "B" batteries.



IS

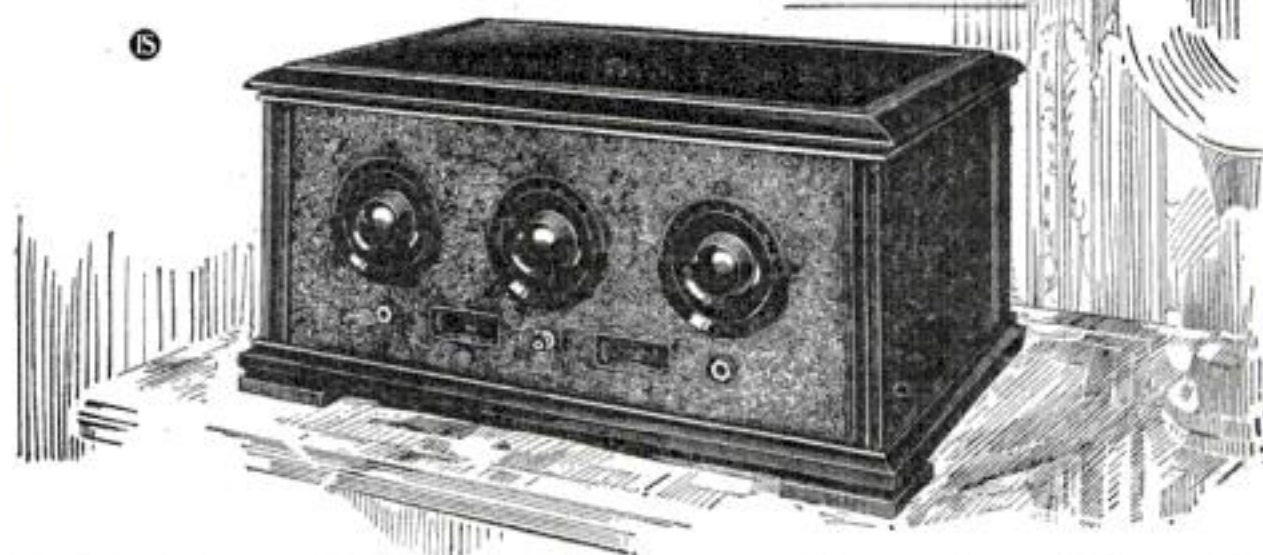

**EISEMANN**  
ELECTRICAL EQUIPMENT



Tested and Listed as Standard by Underwriters' Laboratories



U. S.  
Patent  
1,405,582

# The FANSTEEL Balkite Battery Charger

*does not create disturbances  
in your set or your neighbor's*

The Balkite Battery Charger is entirely noiseless. It can be used while the radio set is in use. It has no moving parts, vibrators or bulbs, and has nothing to break, adjust or get out of order. It is simple and unfailing in

operation. It cannot discharge, short-circuit or damage the battery by overcharging. Besides charging "A" batteries it will also charge "B" batteries of the lead type in multiples of 6 cells. Sold by all leading radio dealers.


PRICE  
**\$19.50**

© **\$20 West of Rockies, \$27.50 in Canada**

Manufactured by FANSTEEL PRODUCTS CO., Inc., North Chicago, Ill.

## The Home Workshop

### Tool Rack and Scraper Handle Made from Clothespins

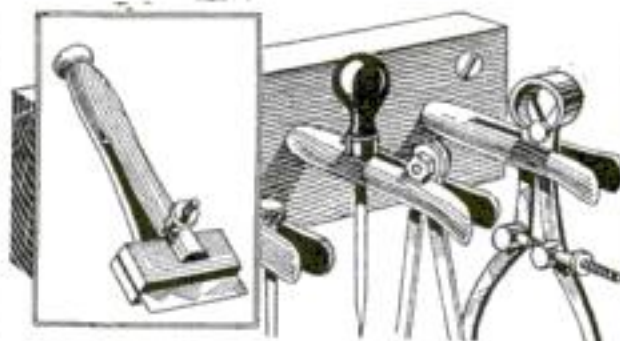

BY DRIVING headless clothespins into holes bored in a  $\frac{3}{4}$ -in. board, it is possible to make a handy tool-rack for small tools.

A clothespin also makes a good handle for a safety-razor blade. Whittle the ends to fit two small blocks, as shown, place the blade between the blocks, and clamp tightly with a machine screw and thumb-nut.—F. N. O.

### Cutting an Arched Opening

(Continued from page 104)

keeping the grain in the direction of the curve as much as possible. Nail the pieces into position under the head trimmer.

"Fur" or strip the sides of the brace planks (if planks have been used) to the width of the studding and lath up, trimming the ends to conform to the curve. Then cross-lath around the curve and sides, and bend around the curve a strip of No. 18 gage, 1-in.-mesh chicken wire, or light metal lath, if available. Nail metal corners to the edges of the opening, plumbing them carefully and keeping them square with the wall. Cut out the old plate across the bottom of the opening. The arch is now ready for plastering.

If it is desired to avoid the expense of plastering, cover the lath with plaster board made of wood fiber, so that a strip of it can be bent about the under side of the arch without breaking. In this event, the lath may need shimming out with thin strips so that the wallboard, which is generally thinner than plaster, will be flush with the old plastered wall.

The patching of the floor is the most difficult task of all. If the floor is hard wood, the neatest way to patch is to chisel or saw off the ends on each side of the opening, provided the boards run crosswise of the partition. This forms a rectangle, around which a strip may be mitered to form a border. Boards laid in the same direction as the floor fill in the remaining space.

With a soft-wood floor, cut off the ends in the same way and fill in without a border. Bevel the ends of the boards so that they will form very tight joints when driven down. Nail from the top with six-penny finishing nails.

The arch and floor completed, replace the baseboards by mitering around the sides of the arch, and bring the picture molding to the edges, returning it upon itself, as shown.

Paper the inside of the arch with a neutral color that will harmonize with the paper in both rooms.

## It's a Wonder! Does Everything in Woodworking



Only **\$225.00**  
complete with motor

8 inch Circular rip saw  
8 inch Circular cross cut saw  
11 inch Band saw  
4 inch Jointer  
Shaper  
10 inch sander  
lathe—14 inch swing

PARKS Cabinet Shop Special is the most recent development in portable, small shop equipment.

It is a band saw, shaper, lathe—all in one. You can do sawing, rabbetting, planing, moulding, matching, panel raising. Just the thing for your home shop! You can order it complete or with just the attachments you want.

Write for circular

The Parks Ball Bearing Machine Company  
1547 Knowlton St., Cincinnati, O.  
Canadian Factory: 200 Notre Dame East, Montreal, Can.

# PARKS

WOODWORKING MACHINES

## FREE Greatest Catalog of Radio Bargains

### SEND FOR IT TODAY

It contains a thousand bargains of everything in radio parts, supplies, complete parts for sets, complete sets, etc., also a mine of very latest information on all different circuits, complete list of broadcasting stations and other valuable data. Send your name and address and we'll send FREE CATALOG.

### BUILD YOUR OWN RADIO SET

All complete parts for the following sets consist of standard advertised guaranteed parts and include drilled bakelite panels and wiring diagrams for easy set construction.

Ultra Audion Circuit . . . . .	\$ 8.95
Five Tube Licensed Neutrodyne . . . . .	33.75
One Tube Cockaday . . . . .	10.45
Three Tube Cockaday . . . . .	19.95
Eight Tube Superheterodyne . . . . .	59.75
One Tube Reflex . . . . .	15.85
Two Tube Reflex . . . . .	20.55
Three Tube Reflex . . . . .	27.85
Four Tube Acme Reflex . . . . .	39.85
Five Tube Improved Cockaday . . . . .	39.65
One Tube Reinhartz . . . . .	10.45
Three Tube Reinhartz . . . . .	17.55
Two Stage Amplifier . . . . .	10.90

Order from this ad and send for catalog. We pay all transportation charges. Everything guaranteed. Money back if you are not fully satisfied.

### FREE SERVICE DEPARTMENT

Our radio engineers will help you solve all your radio problems, and furnish up-to-date information on set construction, operation and improvement. This service is free to our customers.



RANDOLPH RADIO CORP.  
Satisfaction Guaranteed



HEADPHONES  
"Randolph Special"  
2200 Ohm moulded headset

RANDOLPH RADIO CORP.  
159 N. UNION AV. Dept. 343 CHICAGO, ILL.




## The Home Workshop

### How to Hollow Grind Your Ice Skates Easily

IF AN ordinary emery wheel is available, it is the work of only a few minutes to make the wooden jig or bracket shown, on which ice skates can be clamped for sharpening.

Care should be taken that when the skate is clamped in position, as illustrated, the center of the skate edge is

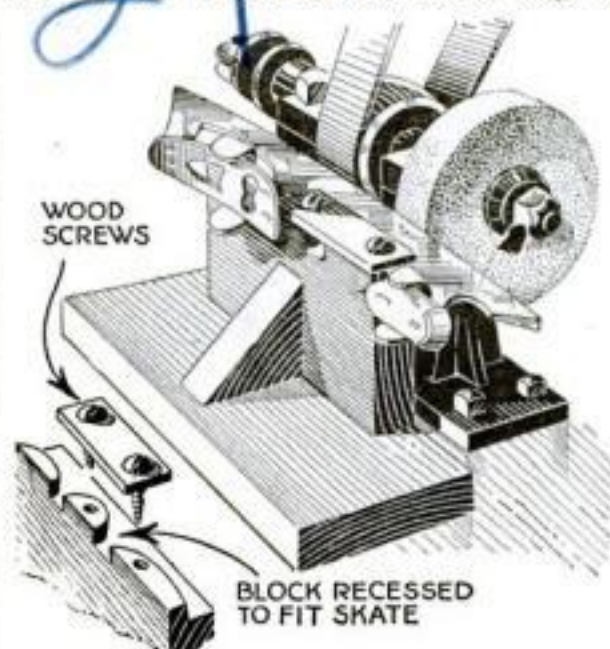

Clamped on a wooden bracket, the skate is pressed lightly against the emery wheel

on a level with the center of the wheel.

The bracket, with the skate clamped on it, is slid along the top of the bench, the blade being pressed lightly against the grinding wheel. Don't try to take off too much stock, but make several complete passes from point to heel of blade and back again.

The smaller the diameter of wheel used, the more concave, of course, will be the skate edge.—F. S. Roor, Fall River, Mass.

### Dutch Crafts Hall Chair


(Continued from page 100)

on the ends of it with beveled shoulders to correspond to the slant of C and D in the finished chair. Cut corresponding mortises in pieces C and D 5 in. from their top ends and fit the parts together. Key seats are cut near the ends of the tenons and the keys, H,  $\frac{1}{2}$  in. square and 2 in. long, are driven in.

The cleats, F,  $\frac{1}{2}$  by  $\frac{3}{4}$  by 8 in., are bored for  $1\frac{1}{2}$ -in. screws, and beveled with the top ends of C and D so that all will fit flush against the bottom of the seat (A), to which they are screwed. Figures C and D are  $11\frac{1}{2}$  in. apart at the top and 16 in. apart at the bottom.

The braces, G, are 2 in. at the widest part. They are screwed to B and C with 10 round-headed screws, which vary in length from  $\frac{3}{4}$  to  $1\frac{1}{2}$  in. Glue may be used in the joints, although screws alone will make a rigid chair and one that may be taken apart.

Any standard stain may be used. The chair shown was colored with a dye made by mixing chrome green with gasoline and darkening it with lampblack. It was well rubbed and, when dry, finished with wax. A flat varnish also gives an appropriate finish on pieces of this character; glossy finishes should be avoided.—J. T. GARVER, Huntingdon, Tenn.

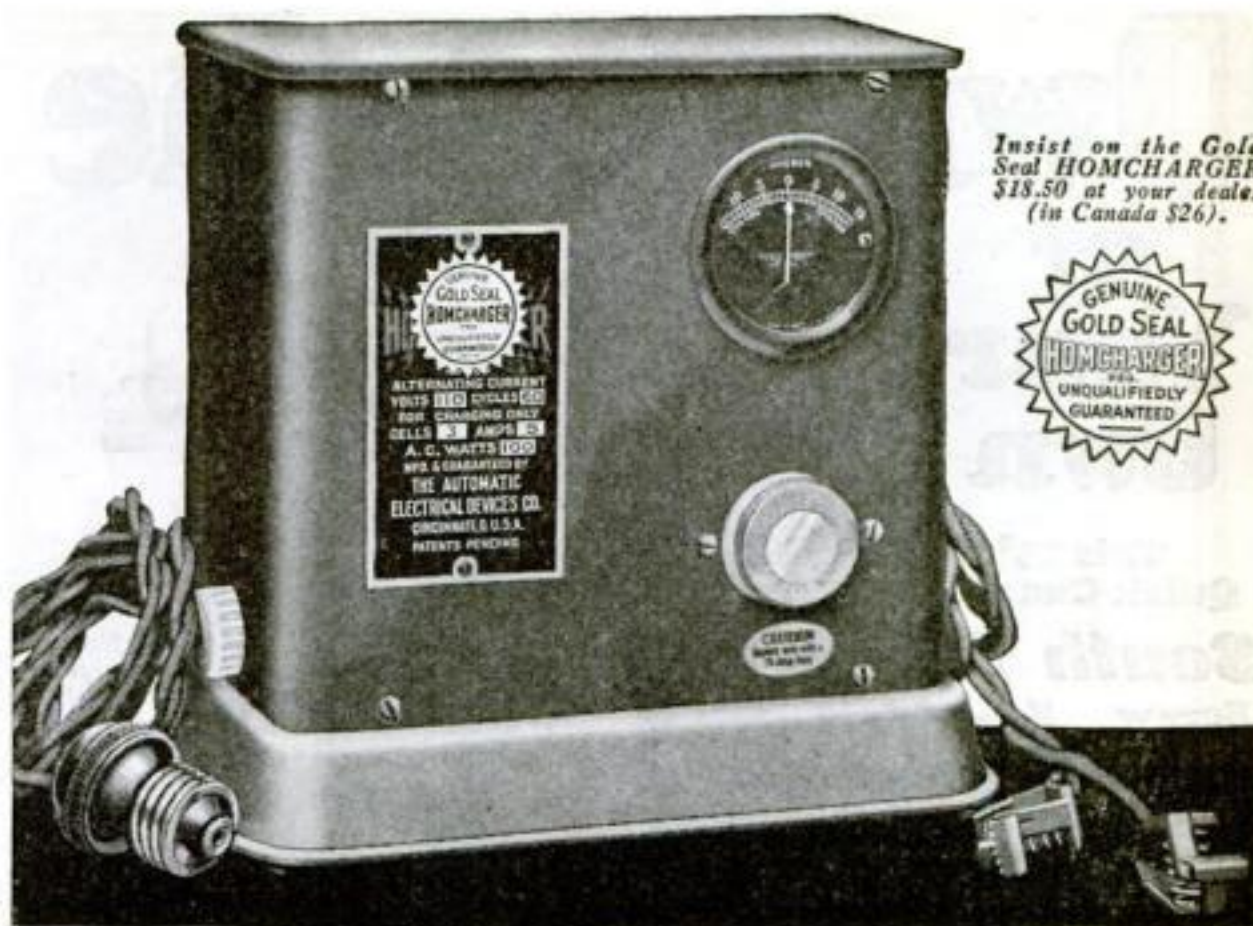

Insist on the Gold Seal HOMCHARGER \$18.50 at your dealer (in Canada \$26).



## You needn't have "battery trouble"

### 14 Gold Seal HOMCHARGER Features

- 1—Simple; needs no care.
- 2—Efficient; costs about 5c to charge the average battery, much less than bulb or liquid types of charger.
- 3—Quick; brings battery up to full charge overnight.
- 4—Tapers charge; cannot injure the battery.
- 5—Clean; no bulbs to break, no liquids to spill or produce fumes.
- 6—Dependable; adjusted and sealed at factory.
- 7—Lasts forever; only one moving part, the Tungsten contact, which can be replaced at \$1 after many thousands of hours of use.
- 8—Fool-proof; charges automatically, no matter which clip is attached to which battery terminal.
- 9—Safe; approved by Fire Insurance Underwriters. No danger of shock or fire.
- 10—Beautiful; sturdy metal case finished in mahogany-red and gold.
- 11—Universal; made in types for all voltages of alternating and direct current. Charges all radio "A" and "B" batteries, and automobile batteries.
- 12—Quiet; its faint hum cannot be heard in next room.
- 13—Unqualifiedly guaranteed.
- 14—Popular price—sold everywhere for \$18.50; in Canada \$26. Complete, no extras to buy.

TWO things will make your enjoyment of radio free from battery trouble. First, any good storage battery. Second, that excellent, simple, automatic charger—the new silent Gold Seal Homcharger.

## GOLD SEAL HOMCHARGER

Such a combination means minimum care and maximum results, with no trouble at all. Then you can use your set all you want. If the battery becomes weak right in the middle of a program, screw the Homcharger plug in any lamp-socket, snap two spring clips over the battery terminals, and go right on listening at full power. Leave the Homcharger connected overnight, and in the morning the battery is charged again.

Everybody says this is the handsomest charger ever seen. The Gold Seal Homcharger is finished in mahogany-red and gold. It has rubber feet and so cannot mar polished floors, tables or cabinets. Safe—approved by the Fire Insurance Underwriters. Can't injure anything.

When buying a set, get storage battery tubes. They give most volume, and in many cases better results in distance too. Make sure the battery you buy is charged, then you can listen in for a week to a month before you buy your Gold Seal Homcharger. Price only \$18.50 complete; \$26 in Canada. Absolutely guaranteed.

**FREE!** Ask your dealer or send direct for our interesting free booklet, "The Secret of Distance and Volume in Radio," containing valuable information on this subject and fully describing the GOLD SEAL HOMCHARGER. Insist on the Gold Seal Homcharger—ask your dealer.


**The AUTOMATIC ELECTRICAL DEVICES CO.**  
Under the same management as the Kodak Mfg. Co.  
131 W. Third Street, Cincinnati, Ohio  
Largest Manufacturers of Vibrating Rectifiers in the World



# Own a Lathe

## of Your Own

This 13" x 5'  
Quick Change Gear  
**South Bend**  
Screw  
Cutting **Lathe**  
Only \$354 Complete

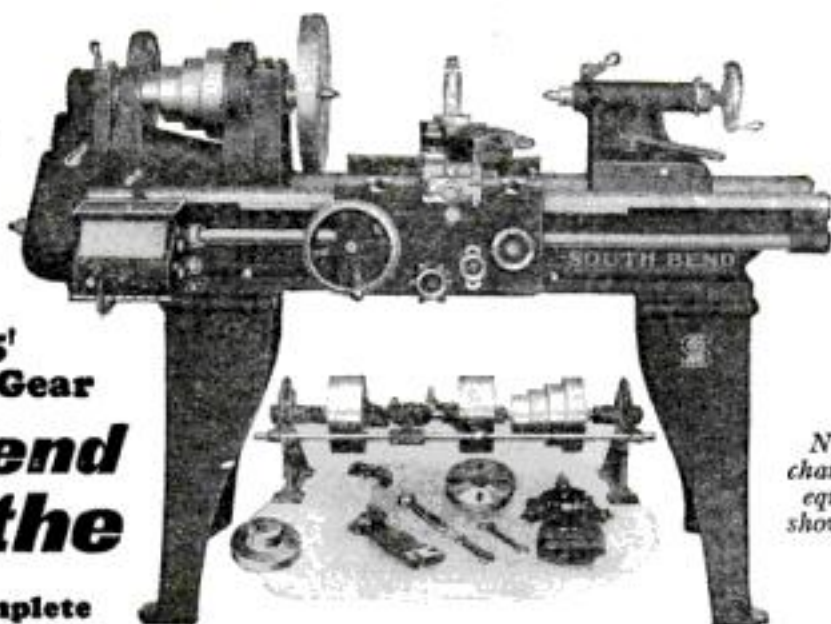

No extra  
charge for all  
equipment  
shown under  
lathe

### Easy Payments If Desired

This unusual offer comes to you from one of America's largest exclusive builders of Screw Cutting Lathes, established 18 years. More than 31,000 of our Lathes in use. For example, in plants of 2 largest Steel Companies, in 8 largest Auto Factories, in 5 largest Railroad Shops, in world's largest Sewing Machine Factory, in 2 largest Fire Arms Factories, by largest Oil Company, and by the U. S. Government, etc.

### Choice of 96 Styles In All Sizes

From Small Bench Lathe to Largest Factory Lathe

You get our latest, finest Lathes, embodying 32 major improvements made in the last two years. You get our signed guarantee on every Lathe and 30-day trial offer right in your own shop. You take no risk.

### Write For FREE Catalog

showing pictures of all our Lathes. Compare our prices with what others ask. Note our liberal guarantee and 30-day trial offer. Send for Free Catalog today.

**SOUTH BEND LATHE WORKS, 317 E. MADISON ST. South Bend, Ind., U. S. A.**



Under-cutting  
mica on  
an arma-  
ture com-  
mutator



Making a  
conical die  
and punch



Threading a tap

Just a Few  
of the Innu-  
merable jobs  
you can do  
with a lathe  
in your shop

## The Home Workshop

### Home Workshop Blueprints Make Furniture Building Easy

BEGINNERS in woodwork frequently write the Editor asking which furniture blueprints in the Home Workshop series are the simplest. The easiest ones are Nos. 3, 35, 37, and 39 in the list below. Their simplicity lies in the absence of difficult joints.

Number 3 has the fewest parts. Number 35 is perhaps the most elementary as it is little more difficult in construction than a box. Numbers 37 and 39 are as simple in principle, but require more time.

Samuel Riker, 3rd, of Redbank, N. J., whose handiwork is illustrated at the right, says:



End table with  
book trough

This is a picture of a book trough end table that I have made from your Blueprint No. 3. I also have the blueprint for a Priscilla sewing cabinet, which I expect to make soon. I expect no trouble, as your directions are very clear and simple.

This month's blueprint, No. 39, is illustrated on page 94.

### Complete List of Blueprints

ANY one of the blueprints listed below can be obtained from POPULAR SCIENCE MONTHLY for 25 cents. The Editor will be glad to answer any specific questions relative to tools, material, or equipment. Blueprint Service Dept.

Popular Science Monthly  
250 Fourth Avenue, New York

GENTLEMEN:

Send me the blueprint, or blueprints, I have underlined below, for which I inclose . . . . . cents:

No.	Title	Price
1.	Sewing Table . . . . .	25c
2.	Smoking Cabinet . . . . .	25c
3.	Book Trough End Table . . . . .	25c
5.	Kitchen Cabinet . . . . .	25c
6.	Two-Stage Radio Receiving Set . . . . .	25c
8.	Shaving Cabinet . . . . .	25c
9.	Arbor with Gate and Seats . . . . .	25c
10.	Porch Swing . . . . .	25c
11.	Bench and Tilt-Top Table . . . . .	25c
12.	Electric Washing Machine . . . . .	25c
13.	Tea Wagon . . . . .	25c
14.	Toy Train, Horse, and House . . . . .	25c
15.	Home Workshop Bench . . . . .	25c
16.	Inlaid Radio Cabinet . . . . .	25c
17.	Cedar and Mahogany Chest . . . . .	25c
18.	Telephone Table and Stool . . . . .	25c
19.	Grandfather's Clock . . . . .	25c
20.	Flat Top Desk . . . . .	25c
21.	Colonial Writing Desk . . . . .	25c
22.	Girl's Cabinet and Desk . . . . .	25c
23.	Pergola Garage . . . . .	25c
24.	Gateleg Table . . . . .	25c
25.	Sailing Outfit for Canoe . . . . .	25c
26.	Baby's Crib and Play Pen . . . . .	25c
27.	Kitchen Cabinet Work Table . . . . .	25c
28.	Pullman Play Table . . . . .	25c
29.	Toy Tea Cart, Garage, etc. . . . .	25c
30.	Tool Cabinet, Bench Hook, etc. . . . .	25c
31.	Priscilla Sewing Cabinets . . . . .	25c
32.	Chinese Game Table . . . . .	25c
33.	Pullman Dining Alcove . . . . .	25c
34.	Trellises for House and Garden . . . . .	25c
35.	Simplified Radio Cabinet . . . . .	25c
36.	Rush-Bottom Arm-Chair . . . . .	25c
37.	Simplified Bookcase . . . . .	25c
38.	Sheraton Table . . . . .	25c
39.	Salem Chest of Drawers . . . . .	25c

Name . . . . .  
(Please print)

Street . . . . .

City and State . . . . .


C. G. CONN, Ltd., Elkhart, Ind.  
232 Conn Bldg., Elkhart, Ind.  
Please send "Success in Music" and details of trial offer on . . . . .  
Instrument . . . . .  
Name . . . . .  
St. or R. F. D. . . . .  
City, State . . . . .  
County . . . . .

## Mail for FREE BOOK

Sousa and other world-famous artists who use and endorse Conn instruments as  
—Supreme in tone  
—Perfect in scale  
—Most reliable in action  
—Easiest to play  
will help you choose the Conn which suits your talent, in the pages of this book. Free Trial; Easy Payments. Send coupon for details.

C. G. CONN, Ltd., Elkhart, Ind.

**CONN**  
BAND  
INSTRUMENTS  
WORLD'S LARGEST MANUFACTURERS

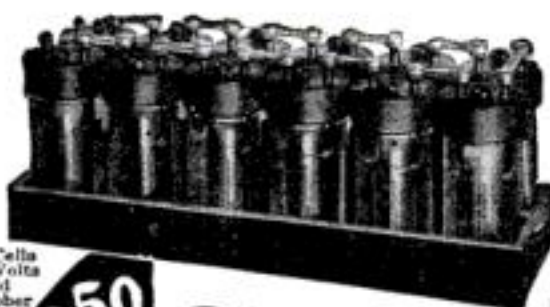

12 Cells  
24 Volts  
Solid  
Rubber  
Case

## \$3.50 COD SPECIAL

### INTRODUCTORY PRICE

For a limited time only, and to introduce this new and superior Storage "B" Radio Battery to the Public, we are selling it for \$3.50. Regular Retail Price is \$5.50. You save \$2.00 by ordering NOW. A finer battery cannot be built than the

### World Storage "B" Battery

(12 CELLS—24 VOLTS)

Ten million homes with Radio Sets—and to countless millions of prospective buyers—this WORLD Storage "B" Battery brings a new conception of battery economy and performance. Here is a battery that pays for itself in a few weeks—will last for years and can be recharged at a negligible cost. And you save \$2.00 by ordering now.

**A Superior Battery Equipped With Solid Rubber Case**  
Has heavy duty 2-1/8 in. x 1 in. x 1-4 in. plates and plenty of acid circulation. Extra heavy glass jars allow ready observation of charge and prevent leakage and seepage of current. It holds its charge, while idle, at constant voltage. You will find this battery a boon to long distance reception. It does away with a great many noises so often blamed on "static." Mail your order today.

### SEND NO MONEY

Just state number of batteries wanted and we will ship day order is received. EXTRA OFFER: 4 batteries in series (96 volts), \$13.00. Pay Expressman after examining batteries, 5 per cent discount for cash in full with order. Send your order NOW and save \$2.00.

**WORLD BATTERY COMPANY**  
Makers of the famous World Radio "A" Storage Battery  
1219 S. Wabash Ave., Dept. 80, Chicago, Ill.

**SAVE \$2.00 BY ORDERING NOW!**





## Home Workshop Chemistry

*Simple Formulas that Will Save Time and Money*

**O**VERHEATED machinery, engine and motor bearings can be detected instantly if they are painted with a preparation of silver mercuric iodide, which is a chemical most sensitive to temperature changes. This paint can be prepared in any home workshop.

At ordinary temperatures silver mercuric iodide is yellow, but it turns dark red when heated to 115° F., a temperature



Preparing a heat-indicating compound



Collecting the yellow precipitate

much below the boiling point of water.

In order to prepare this chemical, make three solutions. The first consists of 3.3 grams of potassium iodide in 25 cc. of water. The second is made by

dissolving 1.3 grams of mercuric chloride in 25 cc. of water. The last is 1.7 grams of silver nitrate in 10 cc. of water.

When all three solutions have been prepared, mix the first and the second and shake thoroughly. Then, and not before, add the last solution and stir. Filter the solution, collect the yellow precipitate, and mix it with a thick gum solution. Paint this on paper or on any sensitive bearing. It will show any slight increase of temperature by its red color.

Moisture is abstracted from other substances by heat or, if heat cannot be applied, by means of calcium chloride in a dish placed within a larger box containing the substance to be freed from moisture. This substance avidly takes up all available water, but the calcium chloride, in order to do this, must be in small lumps or granular in form. When the calcium chloride has lost its original shape in the box, it must be replaced by fresh.



Mixing the silver mercuric iodide with a gum solution



# Put Away Your Headphones


**Now!** You Can Tune Across the Country with Loud Speaker Volume. **! on Just ONE Dial**

Years ahead in perfected, simplified tuning and in loud speaker volume, the sensational new Mohawk is a leader among 5-tube coast to coast radio sets with its true ONE Dial Control. Every good feature of 5-tube power—long recognized as the most efficient—is now improved so that Selective Loud Speaker Distance Reception is now a definite, dependable ONE Dial Control that everyone can operate with ease.

## No Need for Headphones

The new Mohawk is fundamentally and essentially conceived and constructed to be a loud speaker receiver. Without headphones the Mohawk's ONE Dial will tune in stations all across the country direct on the loud speaker for everybody to hear. Even more delightful, the super-selectivity of this ONE Dial tuning goes far above the average. It will cut through the nearby stations with unflinching precision and bring in the distant ones loud and clear. Children can do it—elderly people—any member of your family and friends.

Never before has there been this freedom from the difficult task of carefully adjusting several complex controls. And in your home Mohawk beauty of appearance will again increase the pleasure of its wonderful performance with just ONE Dial. Table model, console and consolette are each built in distinctive period type Adam Brown walnut cabinets. The console and consolette have built-in loud speaker, also battery compartments. Every model is broadly, fully guaranteed.

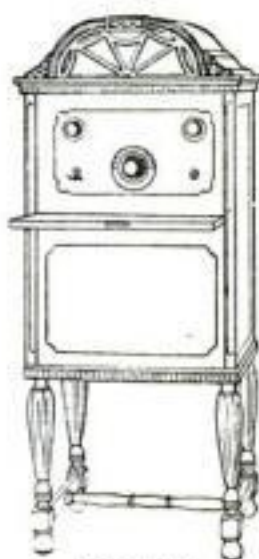

MOHAWK CONSOLE

# The Mohawk 5 Tube Receiver

Send the coupon below. Find out the new facts which show the superiority of this 5-tube Mohawk set—and why you can now absolutely depend at all times on long range, beautiful clarity of tone and wonderful volume tuned direct on the loud speaker with just ONE Dial—and all at NO GREATER COST. Mail the coupon NOW.



**Mohawk Electric Corporation**  
2236 Diversey Blvd., Chicago, Ill.

Mohawk Electric Corporation,  
2236 Diversey Blvd.,  
Chicago, Ill.

Send descriptive literature on the  
Mohawk ONE Dial Receiver.

NAME.....

ADDRESS.....

Please mention your local Radio  
Dealer's Name.





# Hookups!

All the latest and best "Kits" in our new

## RADIO CATALOG

sent to you  
**FREE**

**N**O other Radio Catalog includes such a complete assortment of the best and latest Knock-Down Kits, Parts, and Accessories. You need this book—write for your FREE copy today!

### An Unequalled "Kit" Service

All parts for each "KIT" have been carefully selected and tested by our staff of graduate Radio Engineers—satisfactory results are guaranteed. Completely drilled and engraved panel included with each "KIT." Makes set building easy and sure. No other concern gives this FREE service. Easy to understand Instruction Book and Blue-Prints included with each Outfit. No technical knowledge required to build your radio set.

### Save Money On GUARANTEED APPARATUS

Our business is to buy up manufacturers' and government surplus stocks, jobber and dealer bankrupt stocks—but only brand-new, fully guaranteed, nationally advertised apparatus. Our enormous buying power permits us to pay spot cash and get rock-bottom prices—even way below manufacturer's costs. That's why our catalog is crammed with thousands of wonderful Radio Bargains.

Remember our motto: Salvage means—  
SAVE, SERVICE, SATISFACTION

Dealers!  
Jobbers!  
Manufacturers!  
**ATTENTION!**

We will pay you spot cash for your surplus stocks—brand-new apparatus only! Write and tell us what you have.



## The Home Workshop

**\$50**

### For Unusual Handicraft Photos

**I**F YOU make a hobby of your home workshop, you may have built at some time or other a piece of furniture, a model, a toy, sporting equipment, scientific apparatus, or some sort of household utility that is out of the ordinary—something that causes your friends to exclaim: "How did you ever manage to make that?" Such an article is the inlaid library table described below.

POPULAR SCIENCE MONTHLY wants photographs of the more uncommon and ingenious handwork of amateur craftsmen. For the best photographs received on or before Feb. 24, a first prize of \$25, a second prize of \$15, and a third prize of \$10 will be given. Other photographs suitable for publication will be purchased at regular rates.


Each contestant should write a brief description to accompany the photograph—not more than 200 words—and tell how he came to make the article. In many instances it may be advisable to submit two photos, one an attractive picture showing the object in use and the other giving a close-up of its construction.

The Board of Editors of POPULAR SCIENCE MONTHLY will act as judges and their decision will be final. Unavailable photographs will be sent back only when accompanied by a self-addressed label bearing return postage. The winners will be announced as soon as possible after the judges complete their task.

### 5022 Pieces of Wood Inlaid in Library Table Top

**O**NE typical variety of wood from each state in the Union, as well as Alaska, Cuba, Hawaii, and the Philippines is inlaid in the top of the unique library table illustrated below. It is the work of Gordon H. Turner, Professor of Physics and Chemistry at David Lipscomb College, Nashville, Tenn.

There are 5022 pieces of wood in the top. In fixing them in place, 888 holes

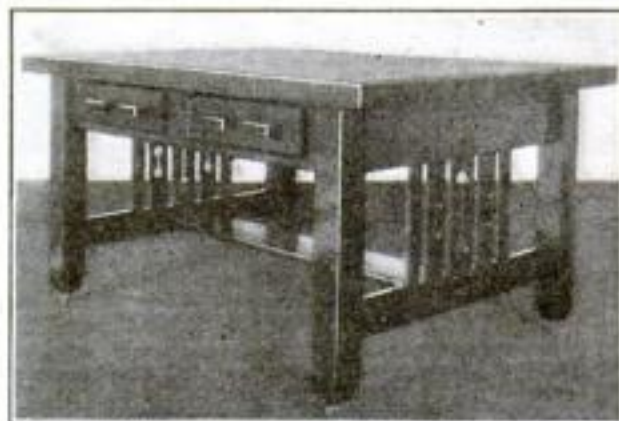

This table, built by Prof. G. H. Turner, of Nashville, Tenn.; contains 52 different woods

were drilled and 444 dowels were used. The framework also is a monument of painstaking intricacy, for 808 holes for dowels, screws, and other fastenings were

(Continued on page 131)

**LOFTIS BROS. & CO. F&S'S**

**DIAMONDS WATCHES**

**CASH or CREDIT**

**SEND FOR CATALOG**

Over 2,000 bargains in Diamond-set Jewelry, Watches, etc. Sent prepaid for your FREE Examination. Catalog explains everything.

Money back if not satisfied.

**Wrist Watch**

No. 27 Dazzling, Blue White perfect-cut Diamond. Solid 18-K White Gold. Price \$100. Pay \$10 down, then **\$2.50 A Week**

18-K Solid White Gold, 17 J. \$29.75  
14-K Solid White Gold, 16 J. \$24.85

**High-Grade Railroad Watches**  
Guaranteed to Pass Inspection

HAMILTON No. 992, 21 Jewels, Adjusted to 5 Post—\$55  
Elgin's Latest Raymond, 21 Jewels, 8 Adjust—\$55  
Elgin's 40 hours one winding, Gold filled case.  
Delivered on first pay—**\$1.00 a Week**  
Month of \$5.50, then

**LOFTIS BROS. & CO. National Jewelers**  
Dept. K871 108 N. State St., Chicago, Ill.  
Stores in Leading Cities

**AGENTS 500% PROFIT**

**GENUINE GOLD LEAF LETTERS**

Guaranteed to Never Tarnish

Anyone can put them on stores and office windows. Enormous demand, large profits. Paul Clark says: Smallest day \$28.70, R.L. Reel made \$920 in two months. Write today for free sample and liberal offer to general agents.

**METALLIC LETTER CO. 433-E N. Clark, Chicago**

**DON'T WEAR A TRUSS**

**BE COMFORTABLE—**

Wear the Brooks Appliance, the modern scientific invention which gives rupture sufferers immediate relief. It has no obnoxious springs or pads. Automatic Air Cushions bind and draw together the broken parts. No salves or plasters. Durable. Cheap. Sent on trial to prove its worth. Beware of imitations. Look for trade-mark bearing portrait and signature of C. E. Brooks which appears on every Appliance. None other genuine. Full information and booklet sent free in plain, sealed envelope.

**MR. C. E. BROOKS**

**BROOKS APPLIANCE CO., 230-A State St., Marshall, Mich.**




## The Home Workshop

### 5022 Pieces in a Table-Top

(Continued from page 130)

drilled or bored, and 148 dowels and 236 screws were used.

The finish on the framework consists of nine coats of varnish and wax; over the inlays are four coats of boiled linseed oil, 12 coats of thin white shellac, six coats of clear oil varnish, and three coats of wax. Rubbing down this record-

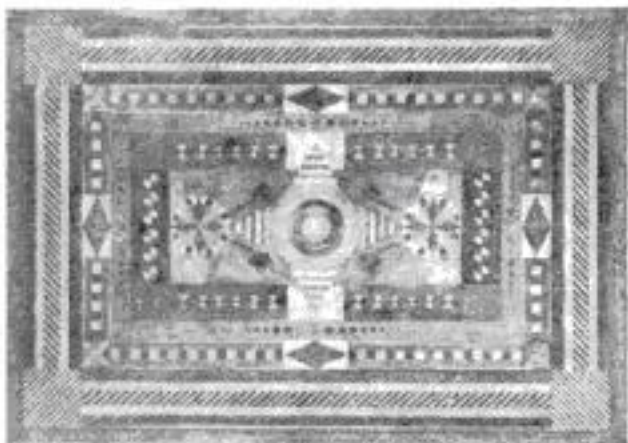

The table-top contains 5022 pieces of wood held together with 444 dowels and glue


breaking number of coats was in itself a task extending over weeks.

While reading poems on trees, Professor Turner got the idea of preserving in a table-top pieces of the most familiar trees of all sections of the country. In the selection and collection of the woods the Forestry Service of the United States Department of Agriculture, as well as state foresters, experiment stations, and conservation stations coöperated.

### Novel Skis Made Cheaply from Rain-Conductor Pipe

**D**ISCARDED galvanized rain-conductor pipe, which can be picked up in almost any second-hand lumber yard, will make a novel pair of skis.

Cut off two pieces 6 ft. long and, just forward of the center, make two slots, as shown, about 15 in. apart. Next, prepare two hardwood foot boards 6 by 18 in. with bolt holes 15 in. apart, as well as two

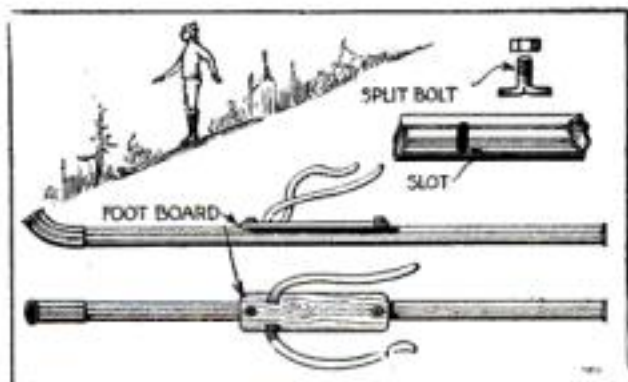

The addition of a footboard turns a length of rain-conductor pipe into a practical ski

slots 3 in. apart in the front end for tie straps of heavy tape or narrow leather.


Through the holes in the foot boards insert T-head bolts made by sawing off the heads of stove bolts, splitting their shanks and bending the split sections outward. Put the heads through the slots in the pipes and turn them at right angles so that they will hold when the nuts are screwed down tightly.

A wide elbow plugged with wood is forced on the front of each pipe.—L. R.

## Man's Education never Ceases

Education is the process of conquering one's environment. The widening of this circle ends only with life. Every day the world should be made new by some new acquisition of truth. Huxley says—"All education is habit formation." Those who form the Encyclopaedia habit—a few minutes a day with Nelson's—are the educated and progressive men of their day.

JOHN H. FINLEY,  
Editor-in-Chief.

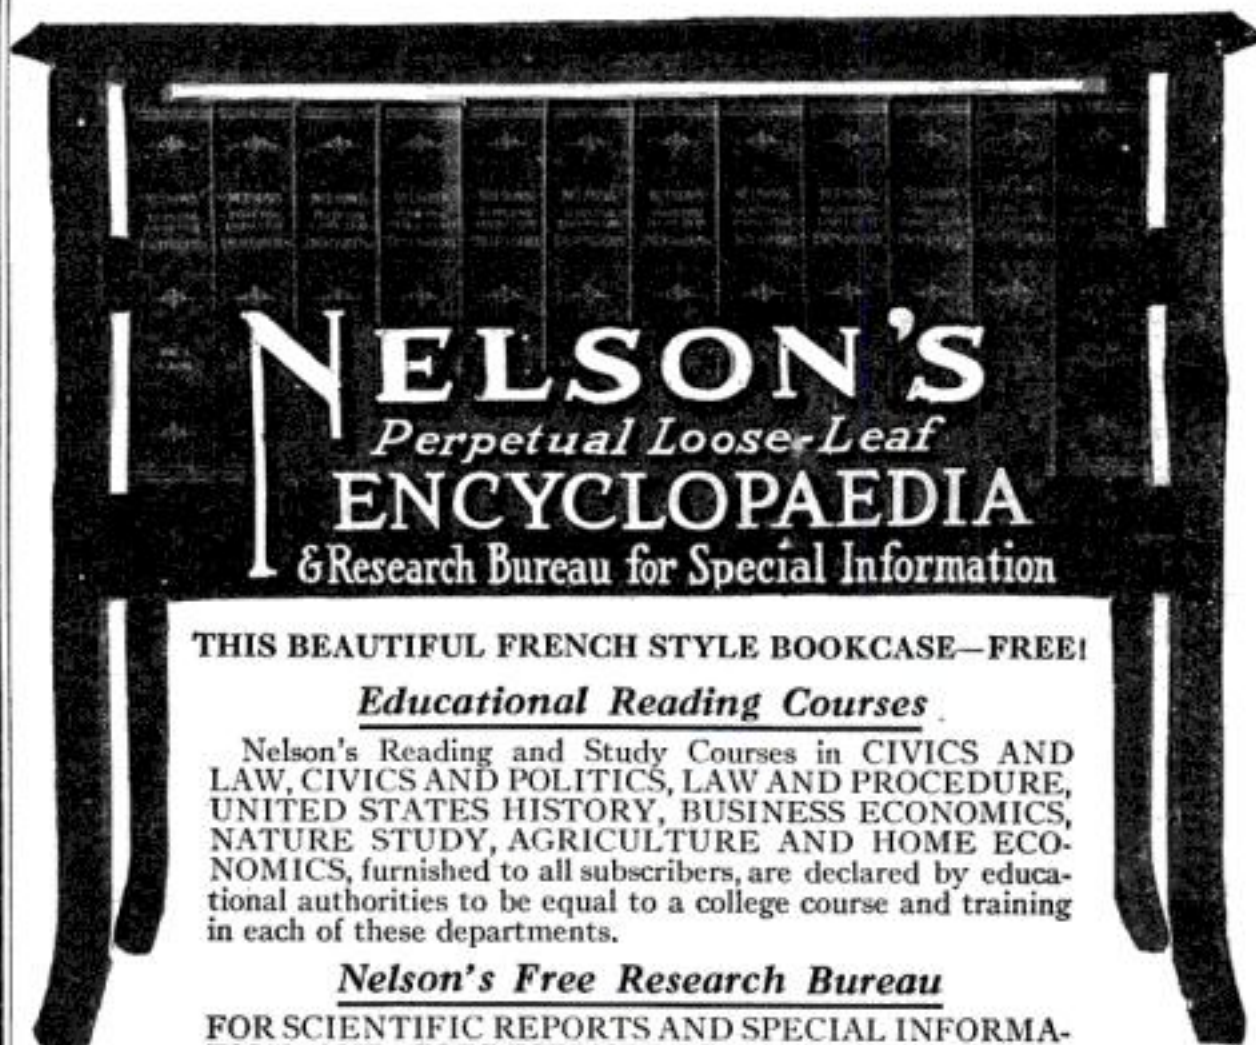

THIS BEAUTIFUL FRENCH STYLE BOOKCASE—FREE!

### Educational Reading Courses

Nelson's Reading and Study Courses in CIVICS AND LAW, CIVICS AND POLITICS, LAW AND PROCEDURE, UNITED STATES HISTORY, BUSINESS ECONOMICS, NATURE STUDY, AGRICULTURE AND HOME ECONOMICS, furnished to all subscribers, are declared by educational authorities to be equal to a college course and training in each of these departments.

### Nelson's Free Research Bureau

FOR SCIENTIFIC REPORTS AND SPECIAL INFORMATION AND CORRESPONDENCE. Every purchaser of Nelson's is entitled to free membership in this Bureau. If at any time you are in doubt on any subject, old or new, write to this Bureau with the positive assurance that you will promptly receive the latest obtainable and most dependable information.

## THE GREAT AMERICAN ENCYCLOPAEDIA

NELSON'S PERPETUAL LOOSE-LEAF ENCYCLOPAEDIA—the Great American Reference Work—is published by one of the oldest and largest International Publishing Houses. The Editor-in-Chief is John H. Finley, LL.D., L.H.D., Editor, New York Times; the Canadian Editor is Sir Robert Falconer, K.C.M.G., D.Litt., LL.D., President of the University of Toronto; the European Editor is Sir Henry Newbolt. Its staff of contributors includes men and women foremost in Scientific, Professional and public life, who are themselves making history.

### This Great American Encyclopaedia

is always an authority, in government departments, libraries, schools and educational institutions everywhere. It covers every field of knowledge, from the beginning of the world to the very latest activities of the present day; by means of the Loose-Leaf binding device, it is the only Encyclopaedia always up to date—it cannot grow old—it is always dependable.

### Originators of the Loose-Leaf Reference System

**EXCHANGE** Send for price list giving amounts allowed for old Encyclopaedias to apply as part payment on a new Nelson's Perpetual Loose-Leaf Encyclopaedia.

### THOMAS NELSON & SONS

Publishers for 125 years

Dept. P. S. F., 381 Fourth Avenue, New York City  
77 Wellington St., W., Toronto, Canada

Please send me your portfolio of sample pages, beautifully illustrated, containing color maps, plates and photographs, and full information how, by easy monthly payments, I can own Nelson's Perpetual Loose-Leaf Encyclopaedia and receive FREE bookcase and membership in Nelson's Research Service Bureau for Special Information. This must incur no obligation whatever on my part.

Name.....

Address.....

City..... State.....

(Adv. Copyright, 1925, Thomas Nelson & Son)



# How many products have you stuck to for twelve years?

For considerably more than 4,000 consecutive days, Mr. Fuchs, of Atlanta, has filled his pipe with the same kind of tobacco and found satisfaction therein.

Before he settled on Edgeworth, in 1912, this veteran smoker had "tried 'em all." And since then he undoubtedly has heard the praises of other good tobaccos sung by fellow smokers.

But Mr. Fuchs stays sold—stays put. Because, he says, for a cool, pleasant, long smoke there is nothing to equal it. Other smokers who seek that kind of smoke should read his letter.

Larus & Bro. Co.,  
Richmond, Va.

Gentlemen:

It has been my desire to write you for the past twelve years, ever since I have been smoking "Edgeworth."

I used every well known brand until I tried Edgeworth and have stayed in the ranks of Edgeworth smokers ever since. I have during that time mustered quite a number of recruits into the army of real pipe joy.

Edgeworth is truly the aristocrat of smoking tobacco. For a cool, pleasant long smoke, there is nothing to equal Edgeworth.

Wishing you further success, I remain,  
Yours very truly,  
Eugene A. Fuchs.

For men like Mr. Fuchs we keep Edgeworth uniform year in and year out. That's probably why the Edgeworth Club has so many life members.



Let us send you free samples of Edgeworth so that you may put it to the pipe test. If you like the samples, you'll like Edgeworth wherever and whenever you buy it, for it never changes in quality. Write your name and address to Larus & Brother Company, 10B South 21st Street, Richmond, Va.

Edgeworth is sold in various sizes to suit the needs and means of all purchasers. Both Edgeworth Plug Slice and Edgeworth Ready-Rubbed are packed in small, pocket-size packages, in handsome humidor holders holding a pound, and also in several handy in-between sizes.

We'll be grateful for the name and address of your tobacco dealer, too, if you care to add them.

To Retail Tobacco Merchants: If your jobber cannot supply you with Edgeworth, Larus & Brother Company will gladly send you prepaid by parcel post a one- or two-dozen carton of any size of Edgeworth Plug Slice or Edgeworth Ready-Rubbed for the same price you would pay the jobber.

## The Home Workshop

### Building a Snow Igloo



(Continued from page 93)

provides support for the near horizontal blocks before the top one, or key block, is in place.

Build slowly. Fit carefully. Do not worry about shape or regularity. No Eskimo builds the same kind of figures on his upper blocks twice in his life. General contour is the important point.

Your key block may be square, oblong, triangular, or even round, depending on how you come out. Drop it gently into place and lower it, if necessary, by the process of running your knife blade back and forth along its edges.

An Eskimo starts his blubber lamp as soon as the igloo is finished. A lamp or an alcohol stove will do. Explorers favor

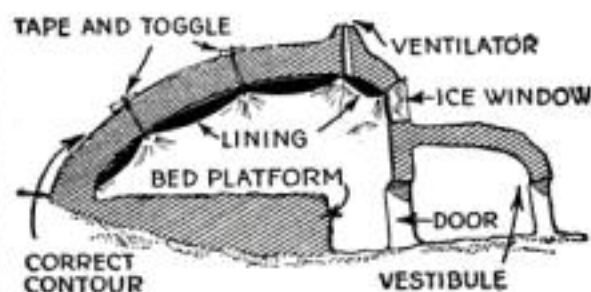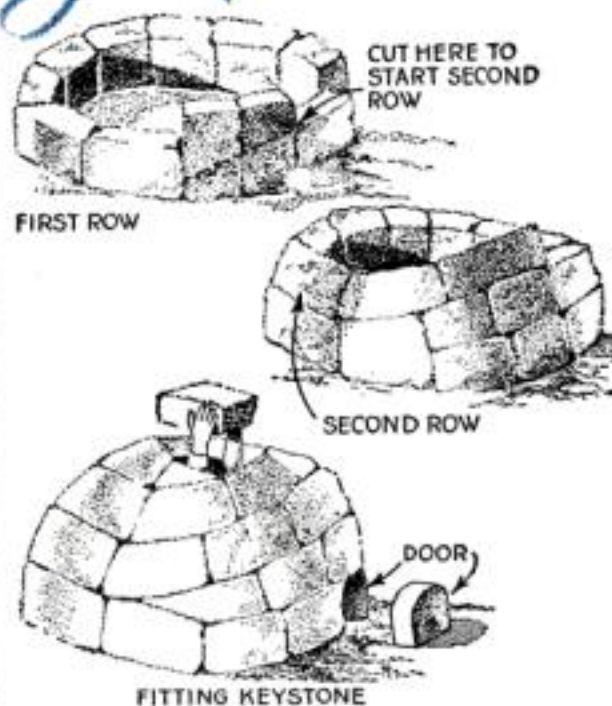

Steps in building an igloo and sectional view showing the bed platform and the interior

a lamp that is really a pressure stove of small size, burning kerosene or gasoline.

The object of heat is to "set" the walls. In five minutes they are seen to settle. If the temperature is around zero, they harden almost immediately. A fine glaze may form inside. This is valuable in shedding moisture or water when cooking begins; it also adds great strength.

During this settling process the rough edges between blocks should be chinked with snow on the outside. A half-round door should be cut and fitted at the bottom in front. Unless a small ventilating hole is made in the roof, the air inside will soon be consumed and the stove go out.

Vestibule, sleeping platform and window are built after about 20 minutes of the settling process. The vestibule is simply a small igloo outside the front door. It provides shelter for dogs and footgear, and makes egress more pleasant. The sleeping platform is built up of hard

(Continued on page 133)

# FREE



## To Each Purchaser of a World Battery

**A 24-Volt "B" Storage Battery positively given FREE with each purchase of a WORLD "A" Storage Battery. The WORLD Battery is famous for its guaranteed quality and service. Backed by years of Successful Manufacture and Thousands of Satisfied Users. You save 60%.**

**Prices That Save and Satisfy**

Auto Batteries		Radio Batteries	
6-Volt, 11 Plate \$12.25	6-Volt, 100 Amps. 12.50	6-Volt, 120 Amps. 14.50	6-Volt, 140 Amps. 16.00
6-Volt, 13 Plate 14.25	6-Volt, 120 Amps. 14.50	6-Volt, 140 Amps. 16.00	
12-Volt, 7 Plate 17.00			

Shipment Express C. O. D. subject to examination. 6 per cent discount for cash in full with order.

**2-Yr. Guarantee Bond in Writing With Each World Storage Battery**

proves satisfactory World performance. Mail this ad with your name and address—we will ship battery day order is received; and give you your choice of "B" Storage Battery or a handsome nickel finish Auto Spotlite, FREE. Write TODAY.

**WORLD BATTERY COMPANY**  
1219 So. Wabash Ave. Dept. 7 CHICAGO, ILL.

This FREE "B" Storage Battery takes the place of dry cell "B" batteries. Can be recharged and will last indefinitely. To be sold retail for \$6.00. It is the only battery of its kind equipped with solid rubber case—and insurance against acid and leakage. Take advantage of this remarkable introductory offer NOW. (To those who prefer it, we will send FREE a handsome nickel finish Auto Spotlite, instead of the "B" Battery. Be sure to specify which is wanted.)

**GIVEN FREE**  
To introduce this new and superior World "B" Storage Battery to the Public



## STOP LEAKS! REPAIR BREAKS! MAKE LOOSE PARTS STAY TIGHT!

### Smooth-On No. 1

STOPS leaks and repairs breaks in pipes, furnaces, radiators, tanks, bursted water jackets, etc., with one simple application.

Keeps bolts, nuts, grease cups, etc., from loosening and dropping off—makes loose handles tight—joins wood, metal or glass to each other tightly—holds on iron, brass, lead, aluminum, etc.

For quick, cheap, lasting joints and repairs and stopping many nuisances in every home, automobile and workshop, Smooth-On is in a class by itself.

Get Smooth-On No. 1 in 6-oz., 1-lb. or 5-lb. tins at any hardware store.

**SMOOTH-ON  
REPAIR  
BOOK**

**SMOOTH-ON MFG. CO.**  
Dept. 58  
574 Communipaw Ave.  
Jersey City, N. J.

## THIS ENGINE FREE For A Whole Month SEND NO MONEY

Your request to try this OTTAWA Engine is all we ask. Don't send a penny. Try engine 30 days. Then, make small monthly payments. Sent direct from factory. Tested 3 times before shipped. Use Kerosene or Gasoline. Sizes 1 1/2, 2 1/2, 3 1/2, 4 1/2 and up to 22 H.P. One year to pay. **FREEBOOK** "How to Know Better" sends you the OTTAWA Engine instead of other engines; why start easier, and economical to run. Send your name on card today.

**OTTAWA MFG. CO.,** 1951-C King Street, Ottawa, Kansas  
1951-C Magee Bldg., Pittsburgh, Pa.





## The Home Workshop

### Quickly Built Box Makes Sled Comfortable for Baby

HOW a child's sled may be made into a useful conveyance for the baby with very little work and almost no expense, is shown in the accompanying illustrations.

A few boards from a dry-goods box can be utilized, or a  $\frac{1}{2}$ -in. board bought at the lumber yard. If the stock is 12 in. wide, it is possible to cut each of the four parts in a single piece. Otherwise, they must be made in two sections.

A hardwood cleat is fastened to the back and front, and the box put together with screws and fixed to the sled with four small angle braces. Either paint or

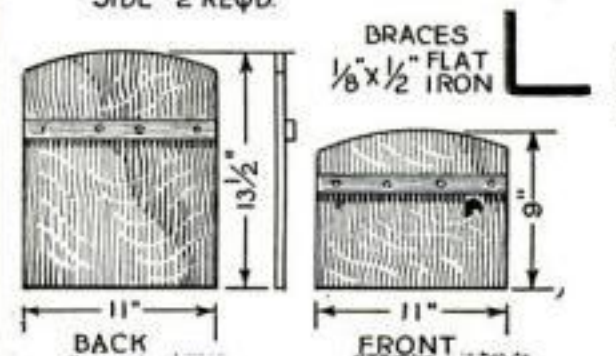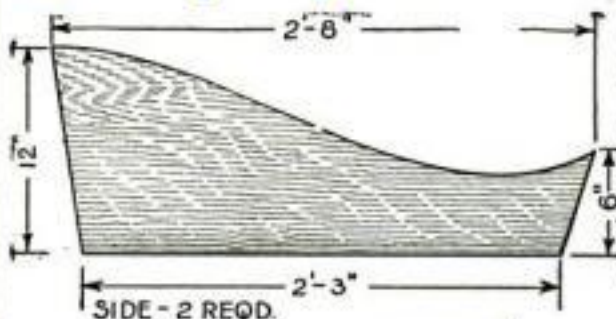

Four wooden pieces, two cleats, and four braces are needed for the sled box

varnish may be used in finishing the box. When the child outgrows this conveyance, the sled is as good as ever for play purposes.

### Building a Snow Igloo

(Continued from page 132)

snow blocks, dry grass or skins. It should be above the level of the entrance to assure warmth. The window is a cake of fresh-water ice cut the size and shape of one of the front blocks and pushed in after the walls have hardened.


A canvas or skin lining adds great luxury to an igloo. It should be made the shape of the finished house. Small pieces of tape lead from various points on its surface through the igloo's walls to bone or wooden toggles outside.

The ventilating hole at the top is kept plugged with grass unless the stove flickers or the walls melt too rapidly.

I once lived comfortably through a 24-day blizzard in a snow igloo. Sat and played cards in my undershirt and smoked my pipe. Outside it was 52 below zero and an inferno of wind and drift. Inside was luxury. That's why I think a snow igloo is a man-made miracle.

# SARGENT

## PLANES

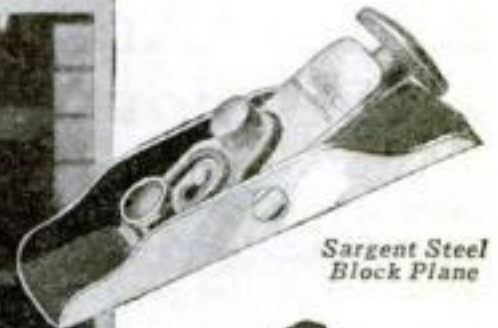

Sargent Steel Block Plane



Sargent Auto-Set Bench Plane

## Built for master carpenters .. best for home workshops

SARGENT Planes have been used for years on construction work from one end of the country to the other. They are fashioned from finest metals, perfectly finished and easily adjusted. They are designed to make short work of the hardest jobs, to stand up under the strain of constant usage. Yet they are so moderate in cost that they should be on every home or school work-bench.

You need the two types shown above. The larger is the Sargent Auto-Set Bench Plane. The auto-set feature permits the chromium steel cutter to be removed for whetting and replaced without changing original adjustment. The Sargent Steel Block Plane is great for smaller jobs and cross-grain or knotty surfaces. See both at your hardware dealer's and write for booklet.

**SARGENT & COMPANY, Manufacturers**  
50 Water Street, New Haven, Conn.

## You, Too, Can Make Money In Your Spare Time

JOIN the thousands of men and women who have found it easy to make extra spending money by selling subscriptions to POPULAR SCIENCE MONTHLY.

Among your friends and fellow workmen are many men who would enjoy reading POPULAR SCIENCE MONTHLY if they only knew about the brilliant articles, vivid pictures, and money saving departments published in this wonderful magazine.

### Easy to Get Orders

As you know POPULAR SCIENCE MONTHLY from cover to cover, you know just the departments and special articles that will be of most interest to your friends.

### Special Bonus

You know dozens of people who will be glad to subscribe to POPULAR SCIENCE MONTHLY if you tell them about it—and one sale leads to another!

To start making "easy" money in your spare time, write today for full information and special bonus offer.

**POPULAR SCIENCE MONTHLY**

250 Fourth Avenue

::

::

::

New York, N. Y.





## "Send for Andrews —he knows!"

"Seems to me that every time a tough problem comes up around here we always send for Andrews.

"Do you know why? It's because he doesn't guess at a thing—he *knows*! He studies those I. C. S. textbooks every chance he gets, and I want to tell you it has made him a valuable man for this firm.

"This is the last time I'm going to 'send for Andrews.' For when he comes in today, he's going to stay in. From now on he's going to sit right in this office as my assistant. I wish I had more men like him."

**H**OW do you stand in your organization? Are you a guesser? Or do you *know*? Make up your mind, today, that you, too, are going to get the special training that you must have to get a better job and a larger salary.

One hour a day, spent with the International Correspondence Schools, in the quiet of your own home, will prepare you for the position you want in the work you like best.

Yes it will! Put it up to us to prove it. Without cost, without obligation, mark and mail this coupon and find out what the I. C. S. can do for you!

### INTERNATIONAL CORRESPONDENCE SCHOOLS

Box 7636-D, Scranton, Penna.

Without cost or obligation on my part, please tell me how I can qualify for the position or in the subject before which I have marked an X:

#### BUSINESS TRAINING COURSES

- |  |   |
|--|---|
| <input type="checkbox"/> Business Management                     | <input type="checkbox"/> Salesmanship           |
| <input type="checkbox"/> Industrial Management                   | <input type="checkbox"/> Advertising            |
| <input type="checkbox"/> Personnel Organization                  | <input type="checkbox"/> Better Letters         |
| <input type="checkbox"/> Traffic Management                      | <input type="checkbox"/> Show Card Lettering    |
| <input type="checkbox"/> Business Law                            | <input type="checkbox"/> Stenography and Typing |
| <input type="checkbox"/> Banking and Banking Law                 | <input type="checkbox"/> Business English       |
| <input type="checkbox"/> Accountancy (including C.P.A.)          | <input type="checkbox"/> Civil Service          |
| <input type="checkbox"/> Nicholson Cost Accounting               | <input type="checkbox"/> Railway Mail Clerk     |
| <input type="checkbox"/> Bookkeeping                             | <input type="checkbox"/> Common School Subjects |
| <input type="checkbox"/> Private Secretary                       | <input type="checkbox"/> High School Subjects   |
| <input type="checkbox"/> Spanish <input type="checkbox"/> French | <input type="checkbox"/> Illustrating           |

#### TECHNICAL AND INDUSTRIAL COURSES

- |   |  |
|---|--|
| <input type="checkbox"/> Electrical Engineering                           | <input type="checkbox"/> Architect                                   |
| <input type="checkbox"/> Electric Lighting                                | <input type="checkbox"/> Architects' Blue Prints                     |
| <input type="checkbox"/> Mechanical Engineer                              | <input type="checkbox"/> Contractor and Builder                      |
| <input type="checkbox"/> Mechanical Draftsman                             | <input type="checkbox"/> Architectural Draftsman                     |
| <input type="checkbox"/> Machine Shop Practice                            | <input type="checkbox"/> Concrete Builder                            |
| <input type="checkbox"/> Railroad Positions                               | <input type="checkbox"/> Structural Engineer                         |
| <input type="checkbox"/> Gas Engine Operating                             | <input type="checkbox"/> Chemistry <input type="checkbox"/> Pharmacy |
| <input type="checkbox"/> Civil Engineer                                   | <input type="checkbox"/> Automobile Work                             |
| <input type="checkbox"/> Surveying and Mapping                            | <input type="checkbox"/> Airplane Engines                            |
| <input type="checkbox"/> Metallurgy <input type="checkbox"/> Mining       | <input type="checkbox"/> Agriculture and Poultry                     |
| <input type="checkbox"/> Steam Engineering <input type="checkbox"/> Radio | <input type="checkbox"/> Mathematics                                 |

Name.....  
Street.....  
Address..... 3-6-24  
City..... State.....

Occupation.....  
Persons residing in Canada should send this coupon to the  
International Correspondence Schools Canadian, Limited,  
Montreal, Canada

## The Shipshape Home



### Clothes-Line Reel

a strong, smoothly working, convenient reel is provided for the clothes-line.


To make one, obtain the crankshaft and belt wheel of an old sewing machine. Build a board drum just by nailing boards firmly together, with the crankshaft between. Build up the reel to ample thickness and shave off the corners. Next, make a box to hold the drum, boring holes in each side to take the ends of the crankshaft. The wheel will have to be detached until the ends of the shaft are in place in the holes. Now put the wheel back on the shaft. The box must be firmly fastened to the side of a building or to a post.

Drill a 5/16-in. hole through the outer rim of the wheel or have a smith do it for you, and

put in an iron bolt to serve as a handle. Cut off a piece of "two by four" about 8 in. long. Saw this at an angle of 45 degrees at one end and bolt the piece through the side of the box as shown so that it is at an angle of 45 degrees above the inside upper rim of the wheel. It will form a friction clutch.

Close the front of the box except for a slit 1/2 in. wide across the entire front. Put a hinged cover on the top of the box. Fasten the end of the clothes-line to the drum with a lagscrew or heavy screw eye and wind the line onto the drum. Pull the loose end through the slit and attach a ring.

The drum of the reel illustrated holds from 200 to 300 ft. of rope. The line can be adjusted in about five minutes. It is protected from dirt and wet and the yard looks better.—MISS. A. BESS CLARK, Maquoketa, Ia.

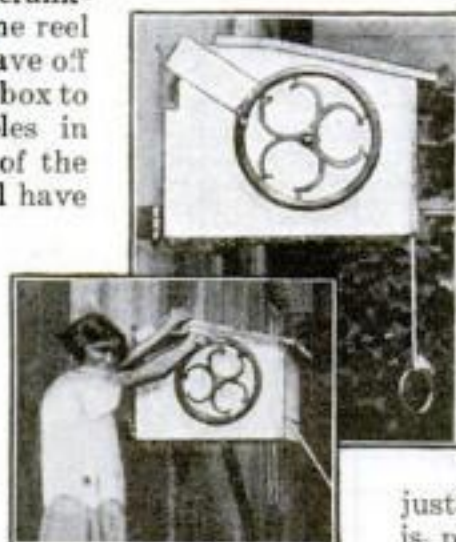

A substantial reel with wooden brake

### A Heat-Retain- ing Cover

food may be made by fastening a wooden handle to an inverted pan, as shown.

Asbestos gaskets are placed between the handle arch and pan, and it is advisable to line the inside of the top with asbestos. This may be fastened on by using small rivets and large washers.



For covering irons or a frying-pan

Under this cover flat-irons heat up very rapidly on a gas or oil stove. It also is useful for warming over food in a frying-pan because it keeps the food moist and palatable instead of dry and burnt on one side.—E. W. CORNELL, Adrian, Mich.

**METAL** tubes in which so many toilet, medicinal, and artists' preparations are sold, sometimes won't unscrew. Light a match and hold the screw-cap over it. After a short time the screw usually will turn.



### Mending Gas-Hose

the wire-wrapped variety often used on gas-stoves and mangles.

Dip the leaking section of the hose in melted paraffin or candle grease until the coating on the rubber comes level with the wire winding. Then wrap the hose with rubber or friction tape.

As a patched hose never should be used except as an emergency measure, replace it with a new hose as soon as possible.—HERBERT A. MINCHER, Youngstown, Ohio.

### Improving Furnace Draft

from the kitchen range entering the same chimney. Many furnace men refuse to guarantee a furnace unless the upper flue is closed, for the reason that the furnace will not have sufficient draft. By cementing a small stove-pipe and elbow into the chimney for the range connection, as is shown at the right, a good draft for both stove and furnace will be insured.—C. W. HUBERTZ, Corry, Pa.

**WHEN** a furnace is installed in an old house, it often happens there is a pipe



PIPE CEMENTED IN




## The Shipshape Home

### Improving Wide Flooring

narrow hardwood flooring on cheap, wide flooring boards.

After being sanded and smoothed, the 4-, 5-, or 6-in. boards are measured and marked off into narrow divisions. Fairly heavy pencil marks are then made down their entire length to imitate narrow joints. Then, when the varnish stain is applied, the wood is grained by using a narrow graining roll in each division separately. This makes a vast difference in appearance.

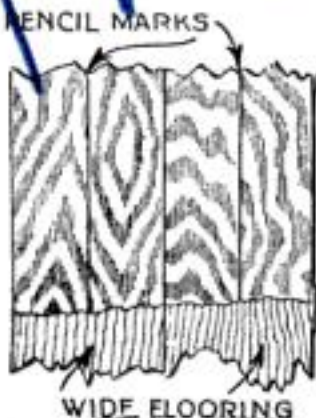

### Stucco Ceiling Finish

IN DECORATING our dining-room, the stucco ceiling presented a problem that we overcame in a manner others may find useful. The paper for the walls was to be a mottled brown. To suit this a bronze color was used in the ceiling finish, but the color could be varied to suit any toned paper desired.

The ceiling first was brushed over with a hard varnish. This took off some of the loose particles and stuck on all the others, so that after the first coating nothing fell off. This was left to dry overnight and then the whole ceiling was coated with bronze, that is, regular bronze powder mixed with bronzing liquid or "banana oil," which dries very quickly.

To tone down the bright color of the bronze, the next coat was a paint made of equal parts of linseed oil, turpentine and gasoline, with enough Prussian blue to give a light color. More blue then was added to make the color much darker, and the ceiling was stippled, that is, an area about 1 ft. in diameter was painted here and there on the ceiling until a clouded effect was obtained. This gave a beautiful finish and did not destroy the stucco effect, which so many finishes would have done.—H. C.

### Screw for Door Spindle

WHEN a door-knob remains loose for some time, the set screw threads in the square spindle are apt to become so badly worn as to be worthless. Instead of retapping the spindle and fitting a larger machine screw, simply turn a round-headed brass wood screw of suitable size into the old hole. The iron will cut threads in the brass and bind the screw so that it will not work loose. This is a repair always quickly made.

BRASS WOOD SCREW

SCREW

KNOB SPINDLE

Replacing a lost door-knob screw

## For Circuit Supremacy—CIR-KIT and Supereflex



Erla Supereflex—new epoch in circuits. Not just a "wave" of popularity, but the permanence of *basically* superior principles, just as advanced today as when Erla introduced the circuits still rated more powerful, tube for tube.

Expressing the best of Erla science, Supereflex circuits also are so easy to own! Not only because of extreme economy in first cost and operation, but also because Erla CIR-KIT enables any experimenter to produce these greater circuits flawlessly. CIR-KIT provides every needed item of Erla Precision Radio Apparatus—exclusively responsible for extreme Erla range, volume, clarity, sensitiveness and remarkable ease of control.

CIR-KIT also provides full-size blueprints; stenciled base-board; and drilled, lettered panel, so that every step must be correct. Assuring lasting supremacy in circuits; the pride of a truly professional hook-up; and incomparable entertainment, CIR-KIT is outstanding in radio today.

Electrical Research Laboratories  
Dept. S, 2500 Cottage Grove Ave., CHICAGO


# ERLA



Erla complete radio instruments lift radio to the realm of art, with the same superiorities CIR-KIT brings.

Erla Floor Console

Erla Table Cabinet

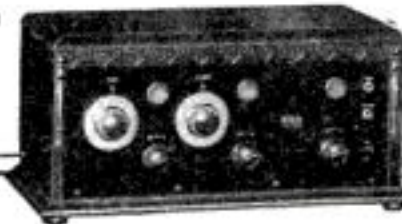


Erla Table Console



## PRINTING offers Big PROFITS

Printers' wages are now so high you can make big money in spare time with one of our printing outfits. No experience necessary. Our instruction book makes everything easy. Presses \$12 up. Pay for yourself in a short time. Write today for catalog presses, type, ink, paper, cards etc. THE PRESS CO. 33 Meriden, Conn.



## \$150 to \$300 PROFIT

### Every Month from Battery Charging

Brings trade, beats competition. Only \$35 cash brings complete equipment for 8 hour battery charging. Small monthly payments. Free trial on moneyback guarantee. Write for Free Bulletin 25.

Hebert Bros. Co., Box P 2, Troy, Ohio.

## SEND NO MONEY 2 Genuine Diamonds 4/100 Each

Cut Stones, No Chips

Solid Gold

\$25

Terms if desired (8 mos. to Pay)

14 kt. White Gold Top. Gold Emblem (any Lodge) or any Initial (Old English) Inlaid in Genuine

HOPE RUBY

Also, in Black Onyx

Send size of finger and ring will be sent for inspection.

Send for Free Catalog

Buffalo Jewelry Mfg. Co., "The Mail Order House" Dept. A



No. 6132 This X Reg. Trade Mark guarantees you genuine diamonds.

Any Letter

Buffalo, N. Y.



# Better Shop Methods

## What You Can Do with the Aid of a Portable Electric Drill

**T**HE foundry was about to pour a 10-ton

casting. The furnace was up to heat with 14 tons of molten steel. The mold was complete to the final detail. Two weeks of exacting preparatory work had made all ready for the pour.

As a last precaution, the molder tried out the release before filling the crucible. He was dismayed to find a broken connection.

After a tense and anxious scrutiny of the break, the master molder gave a few quiet orders. A machinist brought in a portable electric drill, some drills; and several bolts.

Ten minutes' work by the mechanic and his helper with the drill and they were able to put bolts through to hold the connection. The foundry work then proceeded to a successful pouring of the huge casting.

Not only does the portable hand electric drill come to the aid in breathless emergencies like this in a big foundry, but the usefulness of the tool follows through to the final installation of the identification plate on the finished construction.

The hand drill of the electric type, with grips, convenient switch and adjustable chuck, is a comparatively late utility. It really has come into almost

universal application and been appreciated thoroughly during the past 10 years. Its moderate cost, convenience, and serviceability are responsible for its popularity.

The tool is especially convenient because it obtains its power from any electric-light socket.

The light weight and portability adapt it to manual use in practically every location, no matter how inaccessible. Jobs ranging from factory production to the household task of sharpening the carving knife, find the portable electric drill an indispensable time- and

By George Arthur Luers  
Mechanical and Automotive Engineer

labor-saving tool. To describe the applications of an electric drill at length would be impossible in this article, but a brief outline of the valuable work that can be accomplished by it in several different fields will suggest what you can do in your own line with a good drill.

**In the Machine Shop**—Grinding, particularly

tools that are in place on boring bars; tool clearances in work on machines, on lathe tools, and in work being assembled.

Scratch brushing and buffing to remove forging or casting scale and in assembly work, before enameling



In critical emergencies, as when this crucible connection broke, an electric hand drill often can be used to save the day

or polishing the finished product.

Drilling holes at assembly for bolts, rivets, screws, and for attaching name plates. Countersinking and reaming during assembly.

Screwing on nuts is another use for the drill, when special fittings are available. These fittings are some simple form of friction clutch, made up as a plate clutch, which will release the drill from the work when the bolt seats or the tool jams. A clutch also is required in many instances for tapping or reaming, where it is not practical to govern the tool movement closely enough by the switch alone.

A variety of other work in which a revolving tool is used, can be accomplished almost as easily as drilling.


**In Carpentry and Pattern Shops**—Boring with the bits intended for the brace is an achievement in which the portable drill vastly exceeds all the speed of hand work.

Dowel holes, door-latch mortises, tumbler-lock recesses, and almost every form of circular

opening can be made with the electric drill without physical effort.

Tool sharpening, by means of a small

(Continued on page 137)

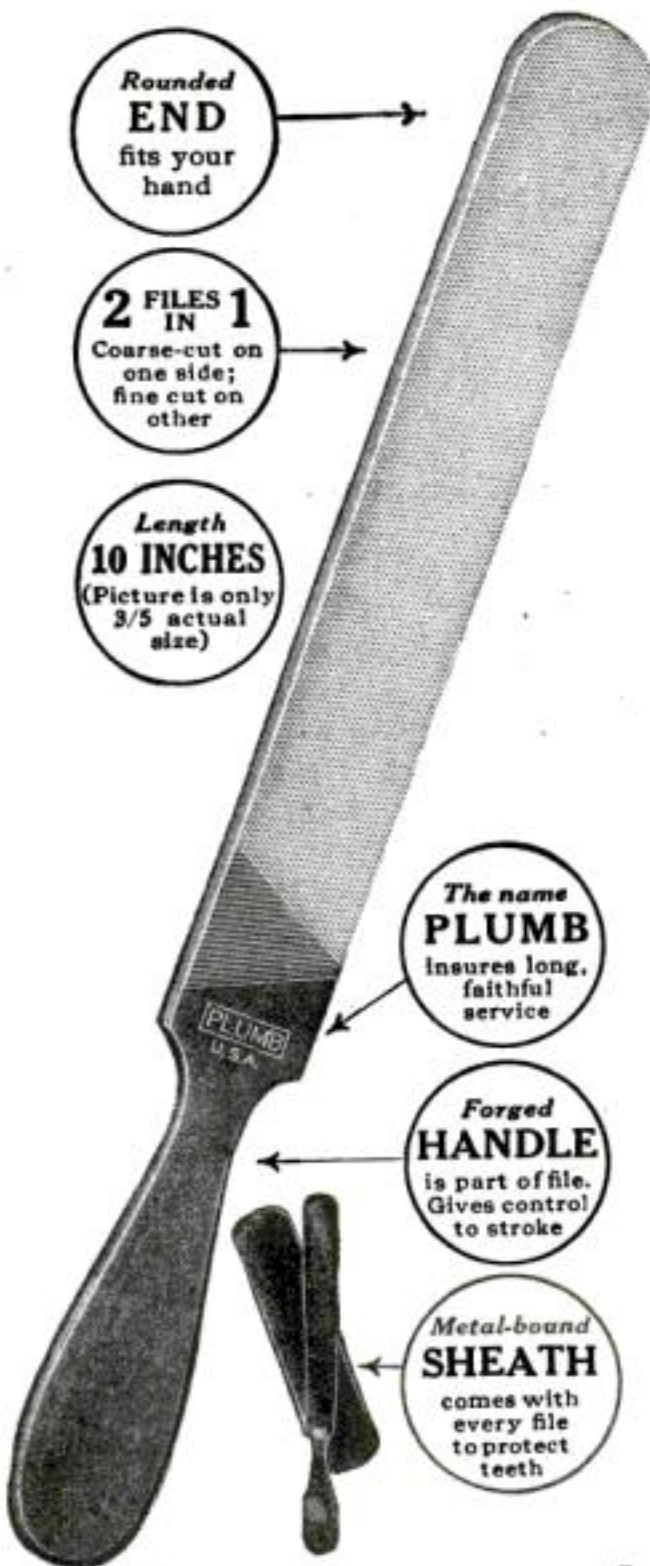

## Right now you need a Plumb All-Work\* File

(\*Trade Mark Reg. U. S. Pat. Off.)

For sharpening tools, knives, etc.; for radio work; for filing steel, iron, copper, fibre, hard rubber, wood, etc., get a Plumb All-Work File.


Files anything, sharpens everything. Two files and a handle, all in one, with sheath to protect teeth.

Carry it in your pocket, your tool kit, or car. You'll wonder how you ever did without it.

FAYETTE R. PLUMB, Inc.  
4814 James Street Philadelphia



**35¢** At your dealer's or by mail.  
(40¢ West of Rocky Mts.)  
Get it at any hardware store where good mechanics trade.  
If your dealer has none in stock, send the cost to us (stamps will do) and a Plumb All-Work File will come to you by the next mail.

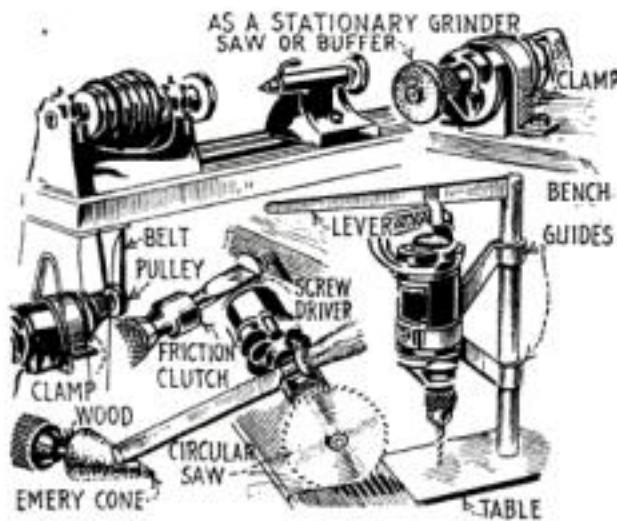

Using an electric drill to drive a lathe, a saw and a screwdriver, and for other purposes



## Better Shop Methods

### A Portable Electric Drill


(Continued from page 136)

emery or carborundum stone mounted on the drill, is most expeditious. The sharpening of circular saws, blades of trimmers, planer blades, router blades, and various other machine tools can be taken care of, frequently by grinding them in place.

Grinding gouges of the inside ground type, is done readily by using an emery cone held in the drill chuck.

Driving screws can be accomplished with great speed and ease with the portable drill. A disk clutch that will release when the screw "bottoms" is required in this application.

Sawing, such as is necessary to cut through centers of flooring or walls, can be done with a small circular saw chucked in the drill. Electric outlets, water piping, and heating-pipe installations re-

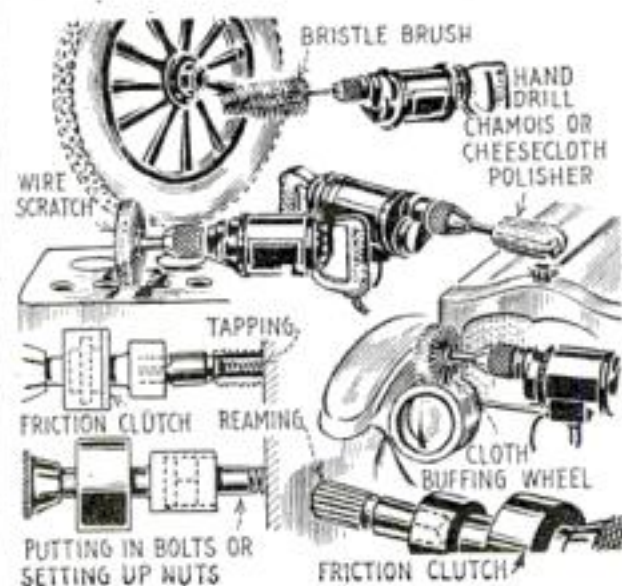

In auto maintenance work, the electric drill has many uses other than drilling

quire the use of the keyhole saw, but the small circular saw on the drill dispenses with much laborious keyhole saw work.

Many other applications of the drill in pattern work are possible by making simple revolving tools to replace edge cutters. By use of a pulley, the drill can be made to drive a foot-power turning lathe. The writer has seen the drill adapted by use of a crank attachment for driving the sand riddle in a foundry.

In the Building Trades — Drilling through girders, joists, and beams makes the portable drill an invaluable aid to the builder. Many operations in plumbing, electric work, heating-plant work, gas-line installations and roof work can be done faster with its aid.

Scratch brush work, in which a wire brush is mounted in the drill, makes possible a much desired finish for face brick on the building front. With smaller brushes the routing of mortar from face brick can be accomplished with ease and rapidity.

Emery and sandpaper disks mounted in the drill are used to advantage in finishing inside trim.

A circular saw on the drill finds a multiplicity of uses in the building, from hanging window sashes to cutting special moldings for trimming out.

An emery wheel on the drill allows edge tools, from the chisel to the hatchet, to be

(Continued on page 138)



\$65

# PARAGON FOUR

Easy to Tune—  
Easy to Own!

THE new Paragon line of Radio Receivers is making radio history for fans of all ages and purses—the new Paragon Four, especially.

A four-tube set that is getting everything that's in the air. Getting it clear and strong on the speaker. And tuning in sharply and distinctly at a twist of the single tuning dial.

As fine a set as Paragon ever made—doing all that you expect of far costlier sets that use more tubes—yet costing only \$65. No greater value in radio today!

Write for "Station Please!", a folder picturing and describing the new set in detail.



New Paragon Four, \$65

Four tubes. Handsome mahogany case 21 inches long. New Paradyne non-radiating circuit. Almost unlimited range for clear, strong speaker reception.

New Paragon  
Three,  
\$48.50

Three tubes. Mahogany case 17 inches long. Clear speaker reception over range that amazes you.



New Paragon Two,  
\$27.50

Two tubes. Mahogany finish case, 11 inches long. Excellent speaker tone and volume from local stations. Almost unlimited phone range.



ADAMS MORGAN CO., Inc., 2 Alvin Ave., Upper Montclair, N. J.

Originators since 1915 of Record-holding Radio Receivers

**\$25.00 in PRIZES**

See top page 10 in front of book for details

### The Saw Sold on Money-Back Guarantee

Backed by a guarantee of satisfaction we have built the largest business in small bench machines in the World.

#### BOICE-CRANE JUNIOR SAW

This sturdy precision built machine will saw, sand, miter, rabbet, tenon, and many other operations with ease and accuracy. Saws 1 1/2" stock. Driven by 1/4 or 1/2 h. p. motor attached to any light socket.

Write for Descriptive Catalog on Bench Machines, Jointers and Band Saws.


W. B. & J. E. BOICE  
Dept. P.S. 2 A, Toledo, Ohio

"Largest Makers of Small Bench Machines in the World"





# When Winter Winds Blow Cold

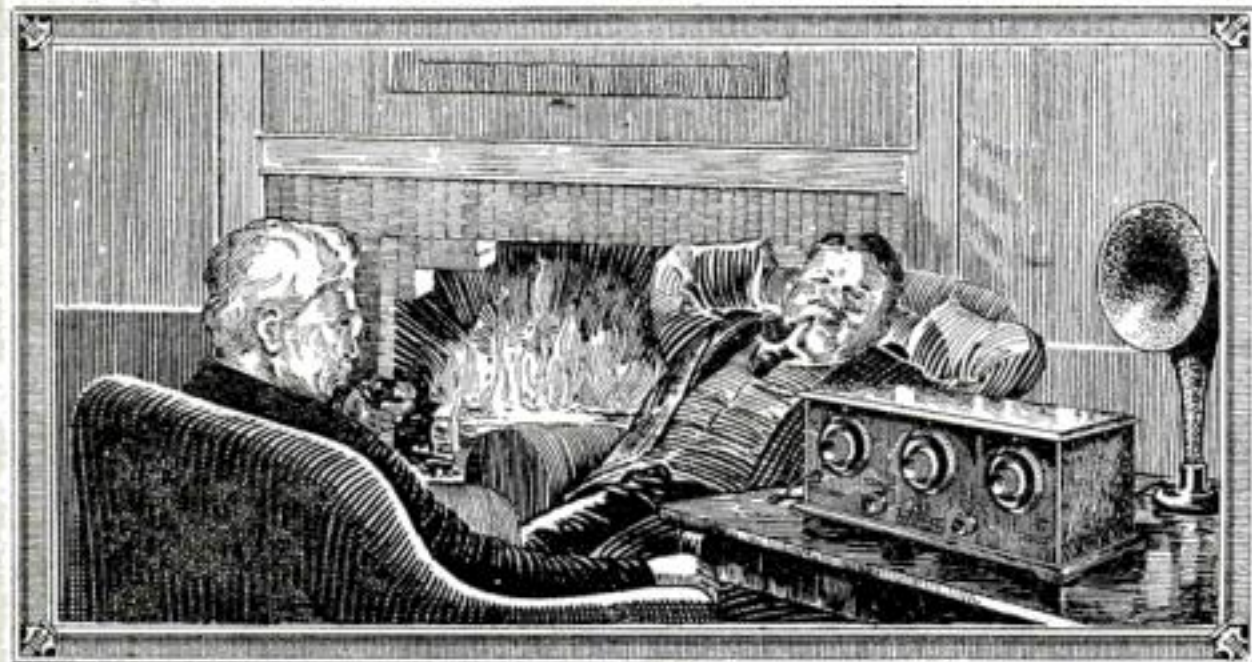

## FRESHMAN MASTERPIECE

*Users Claim It Is the Greatest Value Ever Offered in a Radio Receiving Set!*

### A 5-tube Tuned Radio Frequency Set

made of the finest low loss materials and in a beautiful genuine solid mahogany cabinet, that is attractive enough for the most pretentious room, and at sixty dollars, economical enough for the most modest.

Combines all points essential to the perfect receiver. Real distance reception without that squealing and howling. So selective that once a station is picked up—it can be brought in again on the same points on the dials, whenever you want it. And, what's more,

**\$60**

### IT IS MIGHTY EASY TO OPERATE

*Have Your Dealer Install One in Your Home!*

All genuine Freshman Masterpiece Sets have a serial number and trade-mark riveted on the sub-panel. The Receiver is not guaranteed if number has been removed or tampered with.

**CHAS. FRESHMAN CO., Inc.** FRESHMAN BUILDING  
240-248 W. 40th St., New York

### HAVE YOU AN INVENTION?

If so the WORLD PROGRESS will show you how to

### Protect and Profit From Your Ideas

Sample copy free. One year's subscription 40c. Send for free book.

### "WHAT TO INVENT"

containing Suggestions to Inventors as to Inventions Needed. We invite manufacturers to address us regarding inventions they want.

**WORLD PROGRESS PUB. CO., INC.**  
Room 202 Victor Bldg. Washington, D.C.

### BLANK CARTRIDGE PISTOL

Protection against Burglars, Tramps, & Dogs



Well made and effective; modeled on latest type of Revolver; appearance alone is enough to scare a burglar. When loaded it may be as effective as a real revolver without danger to life. It takes standard .22 Cal. Blank Cartridges obtainable everywhere. Price 50c. Superior quality \$1.00 Postpaid. Blank Cartridges, by express, 50c per 100. **Johnson Smith & Co., Dept. 288, Racine, Wis.**

PRICES

50c.

\$1.00

POST-PAID



Containing a full line of complete outfits and parts at exceptionally low prices. Write immediately to

**UNITED RADIO SUPPLY CO.**  
1346 S. Michigan Ave., Dept. R.S.-2 Chicago, Ill.



Makes breathing easier

Luden's Menthol Formula soothes and relieves your nose and throat.

**LUDEEN'S MENTHOL COUGH DROPS**

## Better Shop Methods

### A Portable Electric Drill

(Continued from page 137)

kept in condition on the spot without loss of time.

In the Tinsmith and Forge Shop—Drilling and cutting out circular disks in thin sheet metal is one useful job that can be accomplished by the drill in the sheet-metal shop.

Tool sharpening is done as in previous instances, with an emery wheel mounted in the drill.

The scratch brush and polishing wheel are nearly indispensable, and the sheet-metal worker will find the portable to have advantages not met with in the fixed grinding head. The scratch brush makes possible clean and perfectly soldered joints.

The countersinking of forged parts and drilling for rivets can be done in the forge shop many times faster than with the older type of hand drill.

The portable has a variety of uses in the tin shop and forge shop that extend from grinding the shear blades to resurfacing the face of the anvil. Many special uses require only special chuck fittings. In fact, in an emergency it will do numerous odd jobs, from stirring the mixing vat to driving a ventilating fan.

In Private and Public Garages—In the repair and maintenance of automobiles, the hand electric drill comes in for a variety of work that perhaps is not exceeded by any other tool.

Hole drilling with the portable expedites the application of riveted patches to the body and fenders. Special fittings for the dash, luggage carriers, speedometers, electric wiring and lights are all installed with the aid of a portable.

Wire scratch brushes, driven by the drill, are used to rasp and buff the rubber on tubes and tires for repairing in some of the large service stations.

Reboring cylinders and honing cylinders is work for which special tool equipment, using the power of the drill, is marketed by several manufacturers.

Nut drivers, screwdrivers, and valve grinders are also being made by manufacturers for use with the portable.

Carbon removal with the wire scratch brush in the portable is an improvement over scraper methods. The wire brush removes every vestige of carbon, even from recesses in the cylinder head, as well as the deposits around the valve ports.

Canvas buffing wheels, dry or with applications of rouge or crocus, are used to clean up the brass, nicked and aluminum parts of the car. Very soft wheels, about 6 in. in diameter, should be used on the nicked parts.

Wheel cleaning is done expeditiously by mounting a round bristle brush in the portable chuck.

A polishing brush can be made from chamois or cheese-cloth, mounted in a wooden holder and secured in the portable chuck, for use in polishing the waxed surface of the car.


These are only a few of the uses. The portable is an invaluable aid in every detail of work from drilling for a cotter pin to plugging up a cracked cylinder head.

(Continued on page 139)



## Better Shop Methods

### Cutter Grinding Arbor

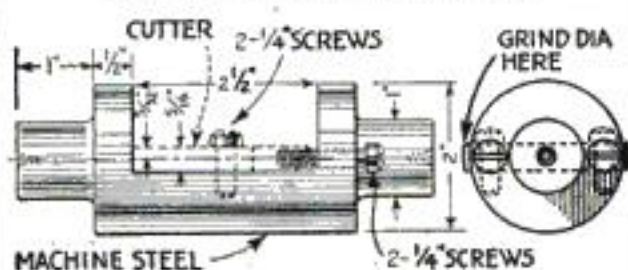

THIS arbor is designed for grinding the outside diameter on removable drill and reamer cutters. The cutter is held on the arbor with two flange-head screws in the same position in relation to the center as it is when in place in the drill or reamer body.

### A Portable Electric Drill

(Continued from page 138)

**In the Home Workshop**—In the home workshop, the portable drill finds an unlimited field of usefulness. Repairs of every nature, from the furnace to the installation of complete window and door screening, are accomplished neatly and rapidly with a handy portable.

A practical application of the drill is as a small power plant to turn the home-workshop lathe. A pulley and clamp connect the portable with a belt drive to the lathe headstock spindle.

The scratch brush, grinding wheel, and buffing wheel are always useful attachments to the home-workshop drill. Tool grinding, metal polishing, removal of old paint and enamel are done with these attachments.

The buffing wheel is of service for many jobs, from refinishing a chandelier to refinishing a brass bed.

With the addition of a small circular saw and a guide plate around the saw, the portable may be converted to wood cutting.

Many constructions are possible that will utilize the power of the drill. These are along similar lines to corresponding shop machines. Surface grinders, small milling attachments, stationary drilling machines, and holders for the portable drill can be made from iron plate, angle iron, and other easily handled materials, including wood.

**Care of the Electric Drill**—The drill requires care. It should never be water soaked and shorted. It is advisable to keep it in a box on a shop shelf, shielded from dust and dampness. The electric cable connection should be given an occasional coating of shellac varnish. The cable should not be kinked unnecessarily, or pulled or rubbed. The commutator and brushes should be cleaned occasionally with fine sandpaper.

Oil the bearings with the regularity prescribed by the maker. It is not necessary to take the machine apart frequently, but all the screws and bolts in the frame should be kept intact and tight.

The electric drill represents the modern trend in tool design. It is no wonder it increases in popularity every day, because it has an unlimited capacity to save time and labor.

# 60 MILES ON A GALLON OF GASOLINE

## TESTS SHOW FORD CAN RUN 60 MILES ON A GALLON

The amazing fact that a Ford can run 60 miles on 1 gallon of gasoline was recently brought to light through tests conducted by America's foremost engineers, where it was shown that a gallon of gasoline contains sufficient heat units which if properly atomized and mixed with air would give this additional mileage. Great strides have already been made in this direction by the recent invention of a simple attachment which can be installed in a few minutes without any alterations to the motor. It is common for Ford Owners to make from 40 to 44 miles per gallon after this marvelous device is attached.

## MOST WONDERFUL INVENTION TODAY BRINGS JOY TO FORD OWNERS

### Starts Ford Instantly

Starting a Ford Car in cold or zero weather is something every Ford Owner dreads—everybody realizes that difficult starting is an abuse on the starter and battery. Thousands of Ford Cars are "laid up" during the Winter just for these reasons. This great difficulty has been overcome. The SUPER positively starts a Ford Car instantly in the coldest weather.

### Marvelous Device

The SUPER is no trick affair—requires no mechanical adjustments and contains all the scientific principles of carburetors costing \$20 to \$35 and in its natural action uses up every particle of unused gasoline and breaks it up into a perfect vapor. The hitherto impossible is now realized by the SUPER.

### Everybody Satisfied

#### Saves 3 to 7 Dollars Per Month

The best investment I ever made. The SUPER is saving me from three to seven dollars each month, besides putting new life into my motor. A. H. WORRA, Iowa.

### Makes 44 Miles Per Gallon

I have tried the SUPER and the results of the experiment are satisfactory. One quart of gasoline run my Ford 11 miles over improved roads which is just about again as far as I could run with the plain Ford Carburetor. G. E. YODER, Penn.

### Finds That Our Claims Are Correct

I find that your claims for increased mileage are correct and that a big saving is made by your SUPER, in fact, the best device I have met with in that line. M. J. VAN LEEUWEN, Mass.

### Eliminates Oil Pumping in Front Cylinder

What a wonderful relief to Mr. Ford Owner when he realizes that he can run his car without the motor pumping oil in the front cylinder. Sounds like an awful lot to expect of any device, but that is what the SUPER does and this is only one of its many advantages because it puts real efficiency into any Ford Car.

### Complete Combustion

The SUPER is so designed that it takes advantage of the present Ford Carburetor and properly atomizes the light as well as the heavy elements of the fuel, converting every atom of gasoline and kerosene into power preventing liquid fuel from passing into the cylinders, thus avoiding carbon formation and oil dilution.

### Easy to Sell Sells Like Hot Cakes

This is a recent letter from one of our distributors: "Enclosed find draft for 200 more SUPERS, rush as I need them badly. I sold and banked \$104.00 in one day. Hope to sell 1000 SUPERS next month." A. W. LEONARD, Penn.

### Making Big Profits Every Noon

I have been working the SUPER at noon only. Yesterday noon I made more money with the SUPER than I did at my 11 hours' hard work in the factory all day. J. L. LEHNER, Wis.

### Had No Previous Selling Experience

This letter shows what ambition does: "I sold six SUPERS in less than 2 hours tonight. I think it's a pretty good start—for it's the first thing I ever sold." E. MANGOLD, Ind.

## \$60.00 TO \$150.00 PER WEEK EASY

You just can't help making Big Money selling the SUPER because a trial sells itself and soon every one in the neighborhood get talking about this marvelous device. Men like Leonard, Shaw, Manner, Kinaley, Peters, Sands, Beck and Hall are not exceptional salesmen but just the type of men that saw an opportunity and were quick to grasp it when within reach. No previous selling experience is necessary, just a little ambition on your part to make money is all we ask and we will extend the same opportunity to you. Spare time will pay you well. If you can devote your entire time so much the better, because the SUPER is a whirl-wind seller and takes hold in a locality like wildfire.

### Men Wanted Everywhere To Introduce

We want distributors in all parts of the country to take orders and deliver the SUPER and to look after the repeat business that is bound to follow and to such distributors we are willing to assign territory. You do not have to own a Ford to take up this proposition but if you have a Ford it is easier to explain its many advantages. However a Trial of the SUPER convinces the most doubtful person and tells a wonderful story.

### A REAL FUTURE HERE

**WEEKS SUPER CARBURETOR CO.,**  
1304-750 Fond Du Lac Avenue,  
MILWAUKEE, WIS.

DeForest  
License



### HONEYCOMB COILS

The Universal all-wave inductance. Back and front panel mountings. Send 25c for Super Het., R. F. and Honeycomb Coil Circuits and Complete Catalog.

Chas. A. Branston, Inc.  
Dept. 9,  
815 Main St., Buffalo, N. Y.



**BURN YOUR NAME ON TOOLS WITH ARKOGRAF**

Protect your tools from theft. Write any name, engrave any design on tools and metal with electricity like writing on paper with pen or pencil. Complete outfit \$3.50, prepaid anywhere. Interesting descriptive circulars free. Write to-day. Agents wanted.

Arkograf Pen Co., 1171-A East Stark St., Portland, Oregon

## \$7.65 IN 4 HOURS SPARE TIME

Hampton made \$7.65 in four hours spare time just wearing this Beautiful Hand-Tailored Cap, made to his Individual Measure, and you can do the same—you can easily earn \$50-\$75 a week in your spare time.

### Get This Cap FREE

I want to give you this cap FREE—I know your friends will be delighted with its Class, Style and Fit and you will make a generous profit taking their orders. Choice of 5 styles and 25 fine fabrics. Send your name right away and I'll tell you how to make \$50 a week in your spare time. Write me at once. J. W. Taylor, Pres., Taylor Cap Manufacturers, Dept. 9-B Cincinnati, O.





## Each Instrument of the Orchestra in PERFECT TUNE

IT makes all the difference in the world with the enjoyment you get out of radio whether the high notes of voice and orchestra are in tune or just a little "off."

A big point of the Bristol Audiophone is that each instrument, and each vocal note, comes in in proper pitch. You will love your Audiophone for its pure harmony of reception.

There are four Bristol Audiophones, priced from \$12.50 to \$25.00, and a cabinet model at \$30.00. If not at your dealer's, write for Bulletins Nos. 3011, 3017, and 3022-CA.

The Bristol Company Waterbury, Conn.

# BRISTOL AUDIOPHONE

## LOUD SPEAKER



Model S  
\$25.00

Solid rubber horn 14 1/2" in diameter. Cast metal throat. Mottled bronze and gold on a velvet mat finish.



## Don't Blame Your Set!

If the batteries run down, you're lucky to get anything but "sounds."

APCO Battery Charger keeps radio batteries *alive*. Works noiselessly, efficiently, surely, fully charging any radio battery over-night for a few cents. 7 1/2 ampere capacity. Pays for itself in six months. Guaranteed one year.

Write for circular and dealer's name

APCO MFG. CO.  
Baker Street, Providence, R. I.

# APCO BATTERY CHARGERS

for "A" and "B" Batteries

## FAHLBERG MADISON, WIS.

### For Perfect Conductivity in Radio

It is now possible for the amateur to get tight, clean joints in his home soldering that make the perfect conductive path necessary in radio work. Mr. E. D. Fahlberg, former Professor of Metallography at Wisconsin University and Metallurgical Engineer with Western Electric Co., has developed Reddy Hot, the complete home soldering furnace. Heats iron in two minutes — non-explosive — Burns denatured alcohol.

## Reddy HOT


### Soldering Furnace and Tested Supplies

Reddy Hot Soldering Outfit consists of: Large soldering copper, detachable handle—Fine soldering copper—Reddy Flo Household Solder—Can Reddy Stick non-corrosive Soldering Flux for Radio—Can Reddy Prest Sal Ammoniac, keeps tip clean—Can Reddy Rub Abrasive Tape. Complete directions. Ask your dealer. If not obtainable we will send direct for a short time only, on receipt of price.

E. D. Fahlberg Mfg. Co., Madison, Wisconsin

JOBBER AND DEALERS:  
Write or wire for attractive Reddy Hot proposition and samples. Display carton of 12.

PRICE,  
\$1.50

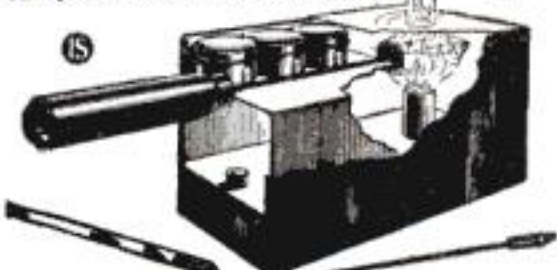

E. D. FAHLBERG MFG. CO., Madison, Wisconsin

Send me prepaid one Reddy Hot Soldering Furnace for which I enclose \$1.50. P. S. M.

My dealer's name is.....

Signed: Name.....

Address.....

## Better Shop Methods

### Success in Grinding

(Continued from page 98)

test, and much valuable data are compiled for the information and guidance of the men who use their product. They are always ready and willing to help solve any of your grinding problems.

Never condemn a wheel because it does not produce the desired results, before making sure that you are using the right wheel. Many times a man complains about a wheel when a change of grade would have turned the trick.

Grinding wheels may be divided roughly into two classes or grades—hard and soft. These two grades, however, are subdivided into many degrees of hardness and softness. The grade of the wheel refers also to the strength of the bond that holds the grit in place.

The hardness or softness of a wheel should not be confused with the hardness or softness of the grit. If a wheel is soft, it will wear away rapidly under working conditions, or the grit can be cut away very easily with a diamond when truing up the wheel. A hard wheel is not affected so easily.

The cutting efficiency of a wheel depends upon the fineness or coarseness of the grit. The grit or grain is known by a number, which signifies the size of the abrasive particles that will pass through a screen of a given number of meshes to the inch. In other words, a 40-grain wheel means that the grit of the wheel will pass through a screen having 40 meshes to the inch.

TO SELECT the right wheel for a given job, you must consider the kind of metal to be ground, whether it is hard or soft; the size of the job, how much metal is to be removed, and the finish desired. If the wheel should be too soft, the bond will be too weak to resist the cutting action for any length of time and it will wear away before the abrasive has had time to do its work. On the other hand, if it should be too hard, the bond will hold the grit long after it has done its work, the wheel will clog up and become glazed, and it will not cut. Continued use in this condition will cause burning of the work or excessive heat. Hard materials require soft wheels and soft materials require hard wheels.

One other factor governs the action of a wheel, that is, the size or diameter of the work. The area of contact between the wheel and the work is increased as the diameter of the work increases. This applies to both internal and external grinding. The larger this area becomes, the softer should be the wheel.

The right combination is often found by testing different wheels of varying degrees until one is found that gives best results. This is practicable on production work, but on tool and experimental work it is not so often possible to get just the right wheel for the job.

The next important consideration for best results is the speed of the wheel. First in this connection is the matter of safety. All modern grinding wheels are designed and built to run at a certain

(Continued on page 141)



## Better Shop Methods

### Success in Grinding

(Continued from page 140)

speed, both with the idea of safety and highest cutting efficiency. The wheels are tested before leaving the factory and the safe speed is marked on the label accompanying the wheel. This speed never should be exceeded.

It often happens that the label is lost or mutilated and this important information is not readily at hand. Roughly, a surface speed of one mile a minute for any kind of a grinding wheel is a fairly safe rule to follow when in doubt, and this is not far from the actual speed specified for any wheel. The makers generally advise a speed ranging between 5000 and 6000 ft. a minute. Never exceed 6500 ft. a minute without special instructions.

**G**REAT care should be taken in mounting a grinding wheel on the machine spindle. It never should be forced on, but must be a free sliding fit.

If the wheel is too tight, scrape out the lead inner lining to make it go on freely. A pad or washer of heavy cardboard, rubber or felt must be used on each side of the wheel between the flanges. The nut is never to be set with excessive pressure, as there is danger of starting a crack that will weaken the wheel. It is good practice and a safety precaution to examine a wheel before placing it on the spindle, to see that there are no hidden defects that might cause it to break.

In all grinding operations it is important to have the wheel running true. The best results are obtained by truing up the wheel often. On some kinds of work this may mean truing up after each piece. On production work of a light character, perhaps a dozen or more pieces can be ground before it is necessary to true up the wheel.

If the machine is running steadily all day on one kind of work, it is good practice to true up the wheel about every 30 or 40 minutes. This insures against clogging and keeps the wheel always sharp so that it will do its best work. A diamond should be used for truing.

**I**N COMMON practice, grinding is classified as "wet" and "dry." Production grinding is usually carried on by the wet grinder. Wet grinding requires a lubricant, either plain water or any one of many grinding compounds. These compounds are usually some soapy substance mixed with water.

A grinding compound is best for all practical purposes; it eliminates the tendency of the work to rust and gives a much better finish. In Figs. 1 and 4 (page 98) is illustrated work done by the wet grinding process. Figure 1 shows a machine set up for grinding crankshafts and a close-up of the job.

Grinding crankshafts is a job that has become highly specialized. It is now commonly done by what is known as the wide-wheel method. In many cases the machine is specially designed and there is no lateral movement of the wheel. The wheel is fed directly into the work

(Continued on page 142)

# MAGNAVOX Radio

Receiving Set TRF-5 with  
Reproducer M4 • \$125.00



**E**XPERIENCED radio users have stated that this Magnavox equipment (illustrated below) represents the highest standard of real value and usefulness ever offered in the radio field.

The Magnavox 5-tube circuit is a special development of tuned radio frequency in which a splendid balance of selectivity, range and volume have been attained. The one dial Station Selector eliminates all tuning adjustments; while the Magnavox Reproducer insures sonorous, pleasing tone for all programs.

Magnavox Radio Receiving Sets, Tubes and Reproducers are carried by reliable dealers. Illustrated booklet on request.

## THE MAGNAVOX COMPANY OAKLAND, CALIFORNIA

New York: 350 West 31st Street Chicago: 162 N. State Street San Francisco: 274 Brannan Street  
Canadian Distributors: Perkins Electric Limited  
Toronto, Montreal, Winnipeg



## NEW VEST POCKET ADDING MACHINE

Adds as rapidly and accurately as a \$300 machine, yet fits the vest pocket. Mechanically perfect. Easy to operate—nothing to get out of order. Everyone who uses figures should own one. Counts Up to 999,999,999

**\$2.95**

Total visible at all times. A pull of the finger clears it. Don't carry a pocket full of pencil stubs and scrap paper to do your figuring. Carry a Ve-Po-Ad.

**10 Days Trial** Send no money. Just name and address and we will send machine postpaid.

Pay postman on delivery \$2.95. Use it for 10 days to prove it does all we claim. If not perfectly satisfied we will refund your money. Limited supply. Send order today.

Reliable Adding Mach. Corp., Dept. 73, 170 W. Washington St., Chicago, Ill.

Here's a money maker. Everybody wants one. Splendid profit. Write for special offer.

**AGENTS**



## Easy to Draw Cartoons

When Shown in the RIGHT WAY

Some of the cleverest cartoonists and comic artists learned how to draw in their spare time by following Cartoonist Evans' Simple and Easy to Learn Method and are now MAKING GOOD MONEY. Send one of your drawings, and let Mr. Evans see if you have ability and receive the Portfolio of Cartoons and full details about the course. It is not expensive.

**THE W. L. EVANS SCHOOL OF CARTOONING**  
825 Leader Building Cleveland, Ohio



# RECEPTRAD

## GREIFF DOUBLE SELECTOR MULTIFLEX KIT

*The Perfect Four Tube Circuit-Loop Operating*



This wonderful circuit uses four tubes and has two stages of radio frequency, a crystal detector and three stages of audio frequency. Developed by the Research Engineers of the Radio Receptor Company, working under the direction of Lieut. Greiff, of Super Heterodyne fame. The tone quality is really captivating. No station too far away to be brought in consistently. It can be assembled by any one in a few hours. For simplicity and ease of tuning, as well as power and quality of reception, it is far superior to a 5-Tube Neutrodyne.

**\$29.50**  
Containing  
principal parts

**\$50.00**  
Including  
all parts

**FREE**—Complete literature that's educating as well as interesting. Just ask your dealer or write direct for assortment No. 2, containing blue prints of wiring diagram of circuit. Just drop us a line giving your dealer's name and address.

RECEPTRAD  
PRODUCTS

**RADIO RECEPTOR CO.**

59 Bank Street


New York City

# Only \$10 Down

Buy This

## Fully Guaranteed Burroughs Adding Machine

Balance in  
easy  
Payments

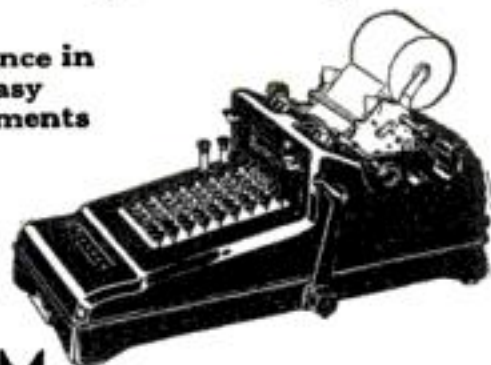

This is a standard Burroughs Machine used in banks, offices and stores everywhere. It has been completely overhauled and worn parts replaced. It is guaranteed for the same period as a new machine.

Take advantage of this remarkable offer today—pay only \$10 down and let the machine pay its way in your business. Total cash price only \$100.

Other styles and sizes in leading makes of figuring machines.

## Mail This Today


General Adding Machine Exchange  
6809 Second Blvd., Detroit, Michigan

Please send me information about this special guaranteed Burroughs Adding Machine.

Name \_\_\_\_\_

Business \_\_\_\_\_

Address \_\_\_\_\_

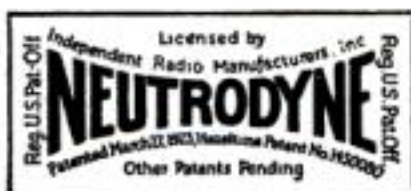

Howard 5-Tube  
Neutrodynes in  
Chicago Success-  
fully Brought in  
European Stations  
on Recent Trans-  
Atlantic Tests.  
If Your Dealer  
Cannot Demon-  
strate Them to  
You, Write for  
Information, Giv-  
ing Dealer's Name.



## Better Shop Methods

### Success in Grinding

(Continued from page 141)

with the hand-feed screw. Stops are set for the size of the pin and the diameter is checked with a dial test indicator attached to the machine. The wheel, of course, corresponds to the length of the pin and is made especially for each size of crankshaft being ground.

A GREAT variety of work can be done by the wide-wheel method, and now machines have been perfected that produce finished parts much more rapidly than the old center-traverse methods. The most recent development in this line is the centerless grinder shown in Fig. 2. This method is a radical departure from all previous practice. The operation of the machine is continuous. The work, being fed into the machine, passes between two wheels, which are set in relation to

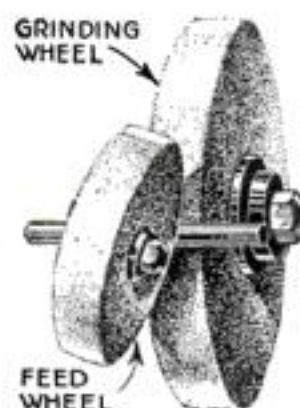


Fig. 5. Diagram showing principle of the centerless grinder

each other to produce a grinding and feeding action, as shown diagrammatically in Fig. 5. The work is supported by a rest, and the grinding wheel presses the work against the rest and also against the regulating or feed wheel. Both wheels are usually of the same material with a surface sufficiently rough to prevent any slipping of the work.

In Fig. 3 is shown the wide range of work the centerless machine will handle. It is claimed that by this method, under manufacturing conditions, it is possible to produce work accurate as to size and uniform in quality of finished product. This is aside from production gains.

Another innovation within the past few years is a type of machine using a wide wheel (Fig. 6). This is known as a "plunge grinder," as the wheel virtually is plunged into the work or against a stop set to obtain the desired size. Although built along the lines of the familiar center grinder, the wheel does not traverse the work, but is wide enough to cover the whole length of the piece being ground.

IN THIS type of machine, the wheel is working to capacity at all times. It is claimed that the wheel requires less frequent truing for a given number of pieces. The wheel can be fed into the work either by hand or automatically by power. The wheels for the machine illustrated are 20 in. in diameter and from 2 to 7 in. in width.

Internal grinding, that is, the finishing of cylindrical holes, is accomplished with the aid of internal grinding attachments for standard machines or by special internal grinding machines. The spindle speeds for these machines are considerably higher than those used on the external type, although the surface speed of the wheel is not necessarily higher.

(Continued on page 143)



## Better Shop Methods

### Success in Grinding

(Continued from page 142)

Although usually done dry, some of the special machines for internal grinding are equipped to use water. The wheels are somewhat softer than those used on external work, as the area of contact of the wheel with the work is greater. If the wheel was hard, it would glaze rapidly and heat up the work so that it would be impossible to take accurate measurements.

Tool and cutter grinding is usually done dry, sometimes with special attachments for the standard machine, but more often on machines specially designed for tool and cutter grinding. The wheels should be soft, as they are almost always grinding very hard materials and a hard wheel would be very apt to burn a delicate cutting edge or draw the temper of the tool being ground.

In grinding cutting tools, such as taps, dies, reamers, milling cutters, and the

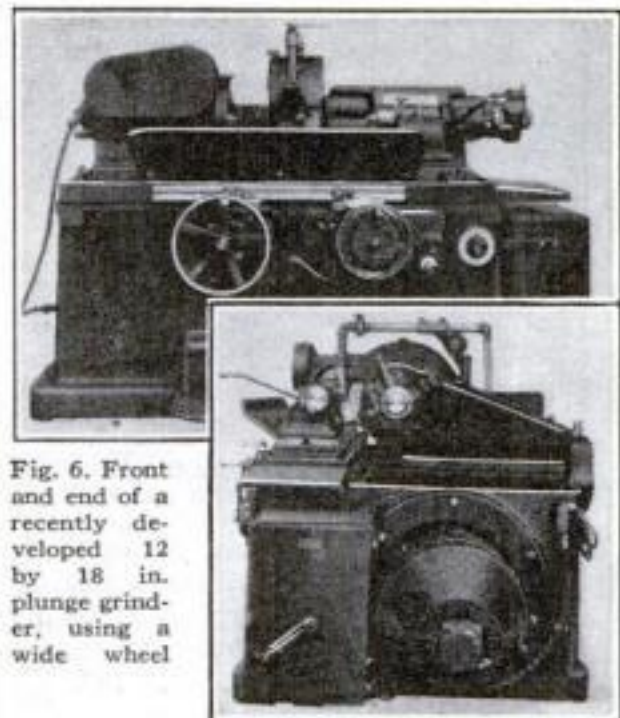


Fig. 6. Front and end of a recently developed 12 by 18 in. plunge grinder, using a wide wheel

like, the wheel should never be forced. Light cuts should be taken so that the wheel will not wear away too much before the cutter has been once around, as any wear on the wheel will result in an out-of-round cutter or reamer.

Another important consideration in grinding tools is to keep the wheel moving across the work when it is grinding. If it is allowed to rest in one spot, it may burn the edge or produce a low spot in the tool.

The relative advantages of wet and dry grinding are somewhat undecided. All kinds of tools are ground dry, but some of the special tool grinders use water or a grinding compound. This undoubtedly is an advantage in grinding twist drills and heavy forged lathe and planer tools.

On production work the coolant serves two purposes: It keeps the work cool and produces a better finish. This has been demonstrated in practice so that wet grinding is a decided advantage in most production work.

The photographs used in Figs. 1 and 4 are published through the courtesy of the Landis Tool Company; those in Figs. 2 and 3 through the courtesy of the Cincinnati Milling Machine Company, and Fig. 6 through the courtesy of the Cincinnati Grinder Company.

## FARAWAY GETS STATIONS FAR AND NEAR—LOUD AND CLEAR

### What FARAWAY Users Say:

#### Gets Europe and Coast to Coast

Your model F is sure some set. I get stations from coast to coast and I also had several European stations last night loud and clear. I'm going to order some more machines very shortly.

R. A. SCHAEFER,  
Box 104, Rhone, N. Dakota.

#### Got Europe and Five Orders

Demonstrated your Model F last night at a party and got Havana, Los Angeles, Oakland and five European stations in silent hour. Sold 5 complete sets. Enclosed are orders. Rush.

J. D. SHOPTHUGH,  
Bellevue, Ky.

#### "Crazy" about Faraway

My customers are just crazy about Faraway sets and I sell them as fast as I order them. We readily pick up Boston, Dallas, Frisco, Pittsburgh and many other stations.

R. J. ADAMSON,  
Brempton, N. D.

#### One Sells Another

I cannot imagine how you can manufacture these Faraway sets and sell them at your retail price. I have been interested in radio sets for several years and I recently had the privilege of "listening in" on one of your 4 tube sets and was surprised at the wonderful results. Send me your literature at once as I want to buy one.

M. N. J.,  
Salt Lake City, Utah.

#### Got 30 Stations

Your 4 tube Faraway is fine. So far I've tuned in 30 known stations on the Loud Speaker. Send me a supply of order blanks and literature and expect many more orders.

A. E. CRAFTS,  
Pittsfield, Mass.



### European and other Foreign Stations received by FARAWAY Users

Faraway Radio Sets stood the Big Test. Mr. R. A. Schaefer of Rhone, North Dakota, was the first to report his success. He writes "I get stations from coast to coast and I also had several European stations last night on the loud speaker, loud and clear." Mr. J. D. Shoptaugh of Bellevue, Ky., Ed. J. Siek and many others report similar success.

### Operates Dry Cells or Storage Battery

Faraway sets are easily tuned, extremely simple to operate and always dependable. They operate with either Dry Cell or Storage Batteries. The latest improved type of set construction used only on high priced sets is employed.

### You, too, can own a FARAWAY with our unique money-saving plan

You take no chance for we GUARANTEE SATISFACTION or REFUND MONEY

We guarantee all the things our users claim—namely—clear, sweet tone—fine volume—coast to coast reception—can be logged—no tube howls, distortion of radiation. Furthermore, there are few sets on the market selling for under \$100 that can compare in beauty and workmanship with the Faraway Model F for \$59.50—you'll agree with us when you see it. For Faraway Cabinets are ornamental and massive—beautifully done in mahogany. The panel is finished in dull platinum with all calibrations finely etched in black.

SO WHY PAY MORE? You'll wonder, like Mr. Johnson, how we sell Faraways at these low prices. OUR UNIQUE SELLING plan is the answer. Don't buy your radio set until you see Faraway. We have a big surprise for everyone who writes for our literature and money saving proposition. Mail the coupon TODAY.

#### DEALERS—AGENTS

Our Faraway proposition offers tremendous possibilities for you. Write quickly for plan and territory.

**THE FARAWAY RADIO CO.**  
653 W. 3rd Street, Cincinnati, Ohio

#### MAIL THIS COUPON

THE FARAWAY RADIO CO.  
Cincinnati, Ohio.

Gentlemen:


Without obligation send me:

- ☐ Your literature and details of money-saving proposition.  
☐ Agents' Proposition.  
☐ Dealers' Proposition.

Name.....

Address.....

City and State.....

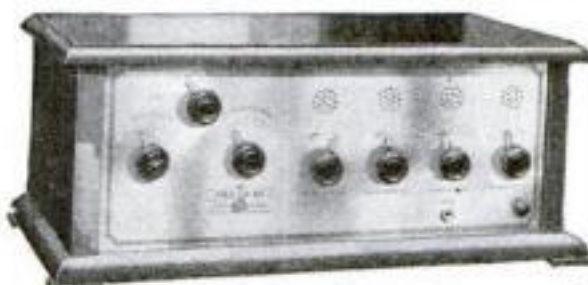

### MODEL F

4 tube set for use with loud speaker.....\$59.50

### MODEL R

2 tube set shown in illustration above.....\$29.50

## CLASS 25¢ PINS

BUY DIRECT FROM THE MAKER  
CATALOG FREE

Either pin shown made with any 3 letters and 2 figures. 1 or 2 colors enamel. Silver plate 25¢ ea. \$2.50 doz. Sterling silver. 40¢ ea. \$4.00 doz.

BASTIAN BROS. CO.

591 Bastian Bldg., Rochester, N. Y.

## Mr. Brush Salesman

Unusual opportunity is offered for aggressive, ambitious, hustling men to represent an old established manufacturer of high grade, guaranteed, fastest selling line of Sanitary Twisted in Wire Brushes, sold direct to the Home. We have openings for experienced brush men as managers in all territories. We want live wire, energetic Go-Getters. We pay larger commissions than any other Brush House in the Country. If you want to earn some real money, it will pay you to write us immediately for our proposition. WIRE GRIP SANITARY BRUSH CORP., 15 Mercer Street, New York City.

## PLANS for HOMES



"The New Colonials"  
50 Houses—6 to 10 Rooms—\$1  
"All American Homes"  
50 Houses—7 to 10 rooms—\$1  
"South-West Stucco Homes"  
75 Duplexes & Bungalows—\$1  
"West Coast Bungalow Books"  
5 to 7 Rms. \$1; 3 to 5 Rms. \$1

E. W. STILLWELL & CO., Architects, 288 Calif. Bldg., Los Angeles

## BUCHSTEIN'S FIBRE LIMB

is soothing to your stump—strong, cool, neat, light. Easy payments.



Guaranteed 5 Years  
Send for Catalog Today

P. BUCHSTEIN CO., 610-3rd Ave., So. Minneapolis, Minn.





**AMSCO DON'T GAMBLE**

in building your set by using inferior parts. You chance the loss of considerable time, money, and patience if the results aren't satisfactory. Be certain! Use only Amsco parts. Made by men who really know their business, they lead the field in all around performance.

Amsco Parts necessary for those who construct their own include the Low Loss Condenser, a laboratory instrument designed for perfection in set building. Also the Amsco Rheostat, for perfect filament control with all types of tubes and the Amsco Tube Socket with genuine Bakelite Base suitable for panel or table mounting.

At dealers everywhere. Free literature on request  
**AMSCO PRODUCTS, Inc., Broome and Lafayette Sts., New York** 

**\$25.00 in PRIZES** See top of page 10 in front of book for details



**Special Limited Time Offer Gives You This Ideal Home for \$1095**

Only a Limited Number Will Be Sold at This Rock Bottom Price

**HERE IS a home** so easy to construct that a member of your family (or a friend) can help you build it in a few days.

**Bossert's easy, convenient plan** of building saves you \$500 to \$2000. No architect's fee to pay, no builders' waste, no costly construction delays.

**The Albany Model** is one of our most popular homes. It has four large rooms and bath, all carefully planned for greatest comfort and least housework. For a limited time only it will be sold for this low price.

**Lumber is delivered "ready cut."** The low price of \$1095 includes full plans and specifications; lumber; millwork; plaster board; hardware; paint and varnish. Bossert quality and service guarantees satisfaction.

**Stop paying rent.** Own your home at a most unusual saving. NOW is the time to buy, and THIS is the house to own.

**Send today** for illustrated Booklet showing how to finance your building with small first payment, balance after delivery of house.

**Louis Bossert & Sons, Inc.**  
 Largest Lumber Plant in the East  
 (House Dept.) 1310 Grand Street  
 BROOKLYN, N. Y.

### The Question of "B" Battery Current Solved with the Kellogg Trans-B-Former





THE Kellogg Trans-B-Former furnishes the necessary plate voltages for your radio set, from your 110 A C, 60 cycle, electric light socket without any interference.

This unvarying current is furnished at less than one-fifth cent per hour. Throw away your "B" batteries and install a Trans-B-Former and your set will operate at maximum efficiency constantly.

The Kellogg Trans-B-Former will:

Improve reception  
 Reduce operating cost to a minimum  
 Add to the appearance of your set

Developed, perfected and guaranteed by the Kellogg Switchboard and Supply Company.  
 At Your Dealers

Each .....

**\$50**


**KELLOGG SWITCHBOARD & SUPPLY COMPANY**  
 1066 Adams Street Chicago, Ill.

### Better Shop Methods

#### New Transmission Controls Speed of Machine Tools

FOR controlling the speed of machine tools and various types of machinery, the variable speed transmission illustrated below was developed recently.

As applied to a drill press, the device allows the speed to be increased or retarded without stopping the drill or shifting belts or gears. The machine may be reversed at once.

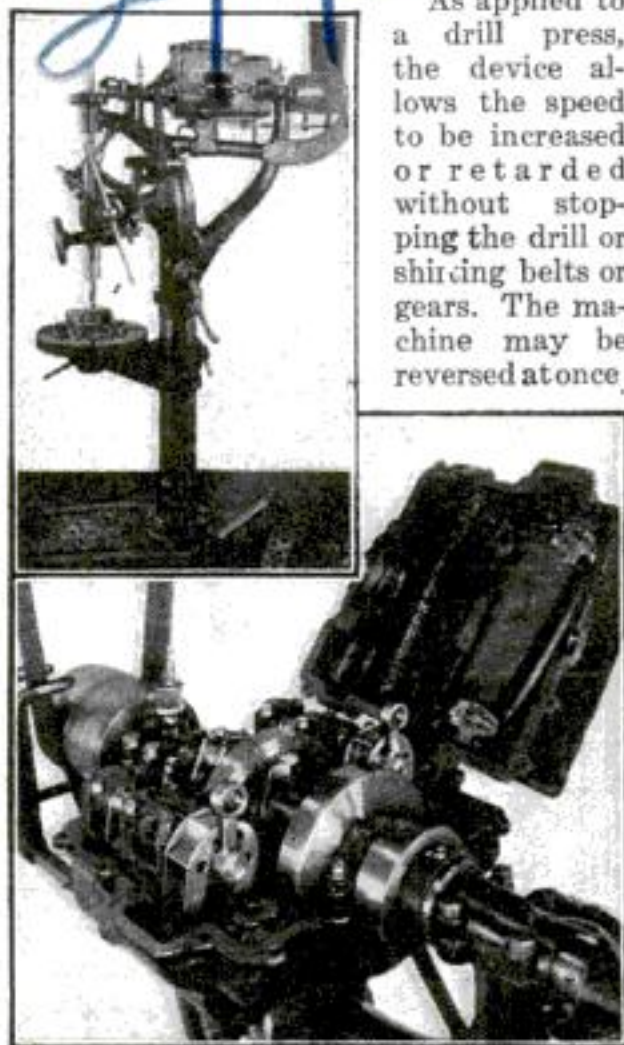


Drill press fitted with new transmission and control mechanism with cover raised

The transmission may be applied to lathes, milling machines, boring mills, and other machine tools, as well as to drills. The mechanism is entirely inclosed and operates in a bath of oil.—A. P. C.

#### Shop Loading Platform Built to Resist Hard Usage

MOST of the loading platforms for lift trucks go to pieces in a short time, whether commercial or shopmade. The platform illustrated has been in competi-

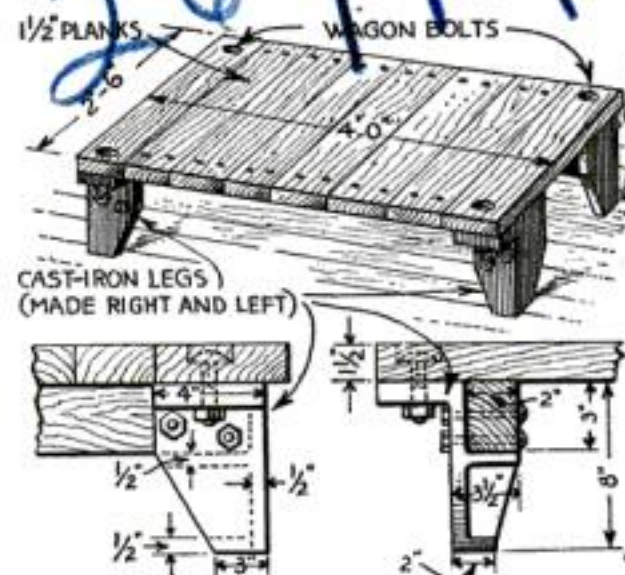

A heavily built loading platform of a generally useful size, and details of the legs


tion with other designs long enough to prove its superiority over the more usual designs. The special features are the cast-iron leg and the method of putting the platform together.







# Further Adventures of BURGESS RADIO BATTERIES

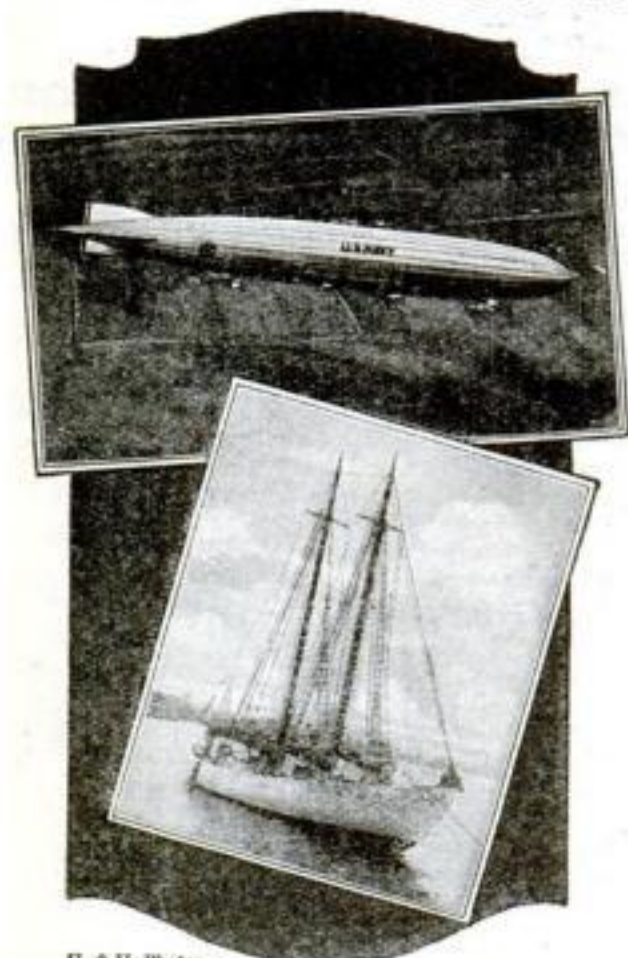

U. & U. Photos.

The Shenandoah is Equipped with Burgess Batteries and MacMillan Carried them to the Arctic

If the quality of any product may be judged in part by the standing of its users, surely Burgess quality must be considered unusually high.

Burgess Radio Batteries are found where there's need for the most efficient batteries made—in emergencies where failure brings disaster—with explorers in far-off lands—with the unsung heroes of the air service—beneath the seas with the crew of the submarines.

## "ASK ANY RADIO ENGINEER"

Send for the Burgess Radio Compass. Surprising—amusing and interesting to the entire family. Sent free of charge from 187 Burgess Engineering Bldg., Madison, Wis. Write for it.

**BURGESS BATTERY COMPANY**  
Engineers DRY BATTERIES Manufacturers  
Flashlight - Radio - Ignition - Telephone  
General Sales Office: Harris Trust Bldg., Chicago.  
Laboratories and Works: Madison, Wisc.  
In Canada: Niagara Falls and Winnipeg




## Better Shop Methods

### Simple Indexing Fixture Aids in Grinding Gear Cutters

A SIMPLE fixture for holding gear-tooth milling cutters while grinding may be made as shown. It consists of a cast-iron plate, machined all over, provided with a stud for holding the cutter, and bolted to the machine table. A stop finger, which is adjustable for cutters of varying sizes, is provided.

The cutter is placed on the stud and the finger is adjusted so that the face of the tooth is at right angles to the wheel spindle. No nut is needed to retain the cutter, which can be rotated or indexed easily by hand.



BASE  
4"X6"X1/2"

For grinding gear cutters quickly

### How Would You Machine This Awkward Piece?

(Continued from page 145)

POPULAR SCIENCE MONTHLY for a better or easier way.

A piece of tool steel  $1\frac{1}{2}$  in. square by  $3\frac{1}{4}$  in. long was planed to the dimensions shown in cross section (Fig. 2), leaving about .010 in. to be ground. On a surface grinder the sides were ground square and parallel.

The work then was laid out on a surface plate and the  $4\frac{3}{32}$ -in. radius was scribed. The piece next was set up as shown in Fig. 3, in a toolmaker's vise bolted to a circular milling table on a vertical milling machine. The piece was trued up to the line with a pointer clamped to the mill and the vise was bolted securely.

The  $4\frac{3}{32}$ -in. radius was milled to the line for a depth of  $\frac{5}{8}$  in. This operation also finished the face A (Fig. 1).

The next operation was to drill and countersink the holes. The  $4\frac{3}{4}$ -in. radius then was finished in the lathe by the use of a cast-iron plate planed as shown in Fig. 4.

The cam was fastened firmly to the plate with  $\frac{1}{4}$ -in. cap screws and the plate was bolted to the lathe faceplate. The work was trued up with the  $4\frac{3}{32}$ -in. radius already milled. The cast-iron plate had been left long enough to be turned off so that the circle could be measured with a micrometer, as it had to be exact.

The other curved surfaces were not so particular, but could not be turned readily in the lathe on account of the difficulty of holding the piece. The  $\frac{3}{4}$ -in. concave radius was made with a mill  $1\frac{1}{2}$  in. in diameter and the  $\frac{3}{4}$ -in. external radius was milled to the line as closely as possible and finished with a file. The other operations were comparatively simple and need no special comment.

The main difficulty is to machine the circles and there is little room to use a strap strong enough to hold the piece while roughing off the surplus stock.—H. L. W.

# Canada

where Dairy Farmers prosper



Western Canada, blessed with low-priced fertile land, a favorable climate and an abundance of pure water offers remarkable opportunities to experienced dairy farmers.

The rich fertile soil on which nutritious grasses and feed of all kinds grow profusely, can be purchased at an average of \$20 an acre—with free use of the land for a year and then 35 years to pay. The yearly payment on an average 160-acre farm is only \$195.30. Think of it.

Cash is paid for all dairy products, most of which are used in the nearby cities. Since 1900 the value of Canada's dairy industry has increased \$164,000,000. Last year alone Canadian dairy farmers put \$54,308,334.04 in their pockets.

Come to Canada where you can put your profits in your pocket, where land prices are low and feed is cheap, where you can double or treble your acreage with the same investment. Both irrigated and non-irrigated lands are available. Investigate now. Send the coupon for full information and details about special inspection trips at reduced fares. Do it now.



**M. E. THORNTON**  
Supt. of Colonization  
Dept. 512, Canadian Pacific  
Railway Depot  
Winnipeg, Manitoba, Canada

**M. E. THORNTON**, Supt. of Colonization  
Dept. 512, Canadian Pacific Railway Depot  
Winnipeg, Manitoba, Canada

I am interested in learning more about:

- ☐ Prairie Provinces of Canada.
- ☐ Irrigation Farming in Sunny Alberta.
- ☐ Business and Industrial Opportunities in Western Canada.

My Name.....

Address.....

Town..... State.....

## FORDS Start Easy at Zero

Nearly double mileage  
50% More Power



The AIR FRICTION is the ONLY Carburetor which changes ordinary gasoline into powerful, super-heated DRY GAS VAPOR which burns up clean, prevents carbon and nearly doubles power and mileage. Leaves no unburned gasoline to run down into crankcase, destroy lubrication and grind out bearings. Motors live two to three times as long with Air Friction. Fords guaranteed to make 34 miles to gallon. Other cars in proportion. Try Air Friction 30 days at our risk. Money back if you want it. Agents wanted. Write today.

**AIR-FRICTION CARBURETOR COMPANY**  
1519 Raymond Building Dayton, Ohio, U. S. A.



**FREE \$20** Fine Tone Musical Instruments  
We have a wonderful new copyrighted system of teaching note music by mail. To first pupils in each locality we will give free a \$20 superb Violin, Tenor Banjo, Ukulele, Hawaiian-Guitar, Banjo, Mandolin, Banjo-Ukulele, Banjo-Mandolin, Cornet or Banjo-Guitar absolutely free. Also teach Piano and Organ. Very small charge for lessons only. Four lessons will teach you several pieces. Over 100,000 successful players. We guarantee success or no charge. Complete outfit free. Write today. Dept. 166. No obligation. Slingerland School of Music, 1815 Orchard St., Chicago, Ill.



## New Wonder of the Seas

(Continued from page 36)

Twenty horsepower is produced by the two motors that spin the towers at the rate of 120 revolutions a minute. They take out of the wind about 1000 horsepower. The inventor claims that each tower produces about 15 times as much propulsive power as that of a similar surface of canvas. An auxiliary engine is used for getting the ship in and out of the harbor.

When the two cylinders are turning at the same speed and the helm is not put "on," the Flettner ship sails normally at right angles to the wind. Changing the speed of one cylinder is said to alter the ship's course just as changing the helm would.

N. W. Akimoff, general manager of the Akimoff Propeller Company, Philadelphia, recently has given an explanation of the Magnus Law as applied to the Flettner ship. He begins by considering what would occur if the two cylinders on the *Buckau* were stationary and the longest dimension of the ship were at right angles to the wind. In that case, says Mr. Akimoff, the wind going around each cylinder would be evenly divided so that there would be no action on the ship.

Then, suppose there were no wind, but that the cylinders were spinning at the rate of 120 revolutions a minute.

THE layers of air directly in contact with the moving cylindrical surface would revolve with practically the same velocity as the cylinder.

But in the case of the Flettner ship, there is a combination of the two preceding cases—the cylinders spinning and at the same time wind acting upon the ship. Then on one side of the cylinder, the velocity of the wind is opposed by the velocity of the air adjoining the cylinder, thus retarding the velocity of the wind. This means an increase in pressure.

On the other side of the cylinder, the opposite is true. The velocity of the wind combines with the velocity of the air layers next the cylinders, resulting in a decrease in pressure. On one side of the cylinder there is an increase of pressure, on the opposite side a decrease, so that there results a strong force from the stronger to the weaker pressure. This causes the ship to move forward.

THE magnitude of this effect, Mr. Akimoff says, may be computed by multiplying the following quantities: The density of the air, the velocity of the wind, the peripheral or surface velocity of each cylinder, the circumference of each cylinder, and the height of each cylinder. In the case of one of the cylinders on the *Buckau*, considering the velocity of the wind at 40 feet a second, the forward thrust due to the moving cylinder would be 12,000 pounds. Actually, this would be reduced, on account of various losses, to the extent of 10 per cent.

Tests are said to have demonstrated that nearly double the speed made by a sailing vessel equipped with sails can be made by one with the rotor equipment. On its trial voyage the *Buckau* developed

(Continued on page 148)



## Surface leakage exceptionally low with this panel built to order for radio

THE needs of radio are special. Better results have invariably followed the use of apparatus and material designed for its own unique demands.

Radion is a special material, developed to order by our engineers to meet the needs of radio. For radio-frequency insulation its characteristics are highest as proved conclusively by authoritative laboratory tests. Surface leakage and dielectric absorption are shown to be exceptionally low.

*You can see the difference by the finish*

You can see that Radion is different if you look at the finish. That high-polished, satin-like surface is not only good-looking but useful as well. Moisture and dirt cannot gather to form leakage paths and cause leakage noise.

### Other Radion Products

The same qualities of low-loss insulation and attractive appearance characterize Radion dials (to match panel), binding post panels, insulators, knobs, etc.—also the new Radion built-in horn.

Radion is mechanically right, too. It resists warping. No special tools are needed to make a clean-cut workmanlike job. Everybody knows that it is easy to cut, saw or drill. Comes in eighteen stock sizes, two kinds, Black and Mahogany.

Better performance will make it worth your while to ask for Radion by name, and to look for the name on the envelope and the stamp on the panel. Radio dealers have the exact size you want for your set.

*Send for booklet "Building Your Own Set"*

Our new booklet, "Building Your Own Set," giving wiring diagrams, front and rear views, showing a new set with slanting panel, sets with the new Radion built-in horn, lists of parts and directions for building the most popular circuits—mailed for ten cents.

Mail coupon today.

AMERICAN HARD RUBBER COMPANY, Dept. PS 2, 11 Mercer St., New York City

Chicago Office: Conway Building

Pacific Coast Agent: Goodyear Rubber Co., San Francisco—Portland

# RADION

*The Supreme Insulation*

## PANELS

*Dials, Sockets, Binding Post Panels, etc.*

American Hard Rubber Company PS2  
11 Mercer Street, New York City.

Please send me your new booklet, "Building Your Own Set" for which I enclose 10 cents (stamps or coin).

Name.....

Address.....

City..... State.....

## Fords Get Double Mileage With New Invention

**Simple Device Works Wonders**

The most amazing and remarkable invention that has come to light in recent years has just been produced by Robert Martin of Chamberlain, S. D. Fords that were formerly making only 12 to 14 miles on a gallon of gas are now getting from 28 to 43 miles, by using this new attachment. This marvelous invention is a simple affair of aluminum and glass and can be installed by anyone in just a few minutes. In addition to increasing mileage, it filters every drop of gasoline fed to the cylinders and removes every particle of carbon at the same time. Mr. Martin guarantees it to increase mileage on any car and is willing to give one free to any person who will help him introduce it. Write Robert Martin, 800-17 Somers Bldg., Chamberlain, S. D., and ask for his free sample offer.

## FREE RADIO CATALOG Sent You Every Month

ALL the latest improved apparatus is listed in our monthly bulletin: "The American Radio Transmitter." If it's new we have it.

**Lowest Prices in U. S.**

Our prices to dealers are the lowest in the United States. All nationally advertised goods at discounts that make you real money. Dealers, get your name on our mailing list. Simply send name today for latest, big monthly bulletin, showing 75 nationally advertised factory lines and 4,850 items.

AMERICAN RADIO MFG. CO. 6 W. 14th St. Dept. B, Kansas City, Mo.





# NEW Youth-Giving Belt Reduces Waistline - Quickly


Instantly makes you look inches thinner and years younger and actually massages away fat every second while you wear it!

**H**ERE'S a new easy way to get rid of that bulky, useless, disfiguring fat without any effort on your part! A new kind of belt has been perfected which actually takes off fat in an easy, gentle way—just like an expert masseur! The moment you put on this new self-massaging belt your waist is instantly reduced from 2 to 4 inches! At the same time all your stomach disorders, constipation, backaches and shortness of breath generally disappear as the sagging internal organs are put back in normal place. You are filled with a wonderful new energy, and look and feel 10 to 15 years younger!

## Reduce the Way Athletes Do

The Weil Reducing Belt is made of specially prepared and scientifically fitted rubber. It is so constructed that, as you wear it, every breath you take and every move you make imparts a constant gentle automatic massage to every inch of the abdomen. It works for you every second, day and night, and reduces much more rapidly than ordinary massage.

The Weil Belt is made of the same kind of scientifically treated rubber that is used by hundreds of professional athletes and jockeys, because it not only reduces quickly but at the

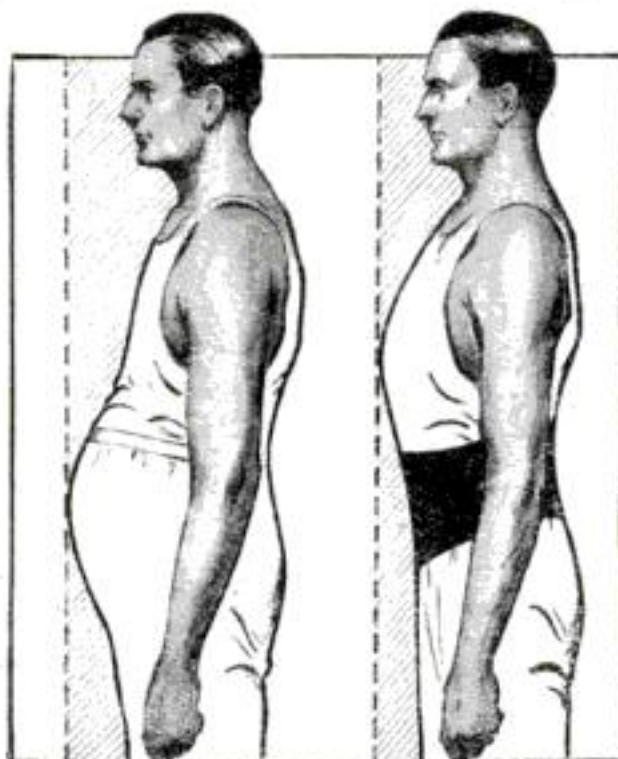

same time preserves their strength. It is highly indorsed for its healthful principles by physicians everywhere. Satisfaction guaranteed or your money instantly refunded without question.

As shown below, every move of your body walking, climbing stairs—merely breathing as you sit—causes the Weil Belt to massage your abdomen. It is working for you every second.



## SPECIAL TRIAL OFFER

Write at once for full description and details of the Special 10-day Trial Offer being made to The Weil Company, 102 Hill Street, New Haven, Conn.

THE WEIL COMPANY,  
102 Hill Street, New Haven, Conn.

Gentlemen: Please send me without obligation complete description of the Weil Scientific Reducing Belt and also your special 10-day Trial Offer.

Name.....

Address.....

City..... State.....



**17c**  
a Day  
Pays for  
this  
Beautiful  
Rocker

Tapestry or Velour

Over 1000 other bargains. Furniture, Rugs, Lamps, Silver, China, Blankets, Stoves, etc. **Save Big Money** at our Factory-to-Family prices. Pay as little as \$3 down; up to a year and a half to pay balance. Get all your Furnishings at once—pay as you use. Thousands buying this new way.



## Big Catalog FREE

New Spring "Larkin Book of Better Homes." Shows everything for parlor, porch, dining-room, bedroom, kitchen. **Bargain Prices** on famous Symphonola Phonographs. Also Symphonola Pianos, Player-Pianos in genuine Mahogany, Walnut, Fumed Oak. Free trial. Up to 4 years to pay. Satisfaction or money back. Check below article interested in.

- ☐ Home Furnishings
- ☐ Pianos or Players
- ☐ Phonographs

Cut out this ad.—write TO-DAY for FREE Book.

**Larkin Co. Inc.**  
Dept. 240, BUFFALO, N. Y.  
Peoria, Ill. Chicago, Ill.

# Play a SAX! Have Fun



Nothing will bring you so many friends or make you so popular as being able to play a saxophone. The new York Saxophone is easier to finger, easier to blow.

**6 DAYS FREE TRIAL**

With our free lessons you can be playing popular tunes in a short time. You can get this wonderful instrument, with its superb tone and perfect workmanship on six days' free trial in your own home.

Then if you decide to keep it you can take ten months to pay. Write at once for free saxophone booklet. Other York Band Instruments sent on the same easy terms. Free literature upon request.

**J. W. YORK & SONS**  
Dept. 925-B Grand Rapids, Mich.

## New Wonder of the Seas

(Continued from page 147)

an average speed of 4.5 knots (5.2 land miles an hour) in unfavorable weather and in later tests the ship was able to make eight knots (9.2 land miles).

The inventor estimates that with a vessel somewhat larger than the *Buckau*, it would take only 18 days to sail across the Atlantic to the United States. He is planning to make the trip late this year after further experiments.

**A** NOTABLE feature of the ship is said to be its ease in changing direction. With its towers reversed it is possible for it to sail backward. A three-bladed rudder enables it to turn around in its own length. Any change in course can be made without coming to a stop or slackening speed.

Supporting Flettner's claim to practicability is his own reputation. Anton Flettner is not a newcomer in marine invention. He is recognized by scientists as an experimenter along original lines. An automatic rudder that he invented a few years ago is widely known and used.

Professor Albert Einstein, originator of the theory of relativity, has pronounced the rotor principle of great practical importance. The Hamburg American Steamship Company, for example, became so convinced of its economic value that it has decided to use the rotors in 10 new freighters of 10,000 tons each to be employed on its East Asia route.

On the East Asia route, wind conditions are so favorable to the operation of the rotor ships that the company hopes to save fuel amounting to 60 per cent of that consumed now. Ships equipped with the device sailing from Germany to Rio de Janeiro will make a saving of 50 per cent, it is estimated, while those to New York will save from 35 to 40 per cent.

One of the largest shipping companies in the world is reported to be contemplating using rotor ships as oil-tankers, and steamship lines even are considering them as possibilities for passenger-carrying vessels.

**T**HE inventor himself does not assert that his device will be a substitute for steam or electric power on the high seas. But he declares that while the speed of an ocean liner equipped with revolving towers would not be increased, the invention would save a large percentage of its coal and oil, resulting in a great saving in storage space, as well as in the cost of fuel.

An extremely important line of inquiry developing in the consideration of this device, is whether it will be possible to store electrical energy, created by the rapidly revolving cylinders, in batteries for future use. If this is possible, the world will have a remarkable new means for producing electrical current. Wind, the vast, unknown, unmeasured element, could be harnessed in this easy way to propel anything from farm machinery to an electric power plant.

Flettner has hinted of this. Wind power, he says, eventually may supersede both coal and water power on account of its cheapness.



## Henry Ford—"There Is Always Room for More"

(Continued from page 39)

superintendents, foremen, and "straw bosses" alike. And Henry Ford, being the supreme executive of them all, himself circulates as they do, though through a wider area.

His interest in and knowledge of the most minute details of the things that are being done throughout his organization is profound, which probably is not remarkable considering that he himself instituted, or at least directed, the adoption of all these methods and policies. He is constantly alert to unearth new developments that may be useful in his work of making better motors. About 500 new ideas a week on the average are given a trial in the Ford organization, sometimes only on a laboratory scale, at other times in gigantic proportions, and the cost of this kind of research reaches a million dollars a week!

SIX hundred acres of flax recently have been harvested at Dearborn as a means of testing the advantages of linen over cotton in the manufacture of the cloth used in motor-cars. There is a plantation in Florida where experts are investigating methods of growing rubber. Sometimes these experiments produce results of immediate practical utility, as for example, when Henry Ford's scientists determined not long ago that rubber, asbestos, and straw, suitably processed, might be substituted effectively for wood in making steering-wheels for Ford cars.

Sometimes such tests yield nothing, which bothers Henry Ford no whit, so long as the experimenter has courage enough and energy enough to try again.

Methods and processes that have been tested and adopted by the Ford organization are not kept secret, nor guarded in any way. They may be borrowed and utilized by any other motor manufacturer or any other industry. Engineers in the employ of André Citroën, sometimes called the "Henry Ford of France," not long ago spent weeks studying the methods of the Ford factories with a view to adopting them in the manufacture of Citroën cars. They were given all possible coöperation.

NOW, whither is all this leading? What may be expected of the Ford Motor Company of the future? We hear frequent prophecies regarding "flivver" airplanes. Often the opinion is expressed that in the future men will journey through the air in tiny, individual planes as casually as they now drive their automobiles through the city streets.



I asked Henry Ford a few days ago whether he ever considered the possibility that the Ford Motor Company might some day be turning its resources to the manufacture of airplanes.

"We are, of course, interested in the airplane motor," he replied, "as we are interested in every kind of motor. We took the lead in the production of airplane motors during the war. We have an airplane landing-field, and we are building a mooring-mast for dirigibles. The

(Continued on page 150)

## "Buy a Studebaker Direct from the Maker"

Latest  
Style  
Thin  
Models

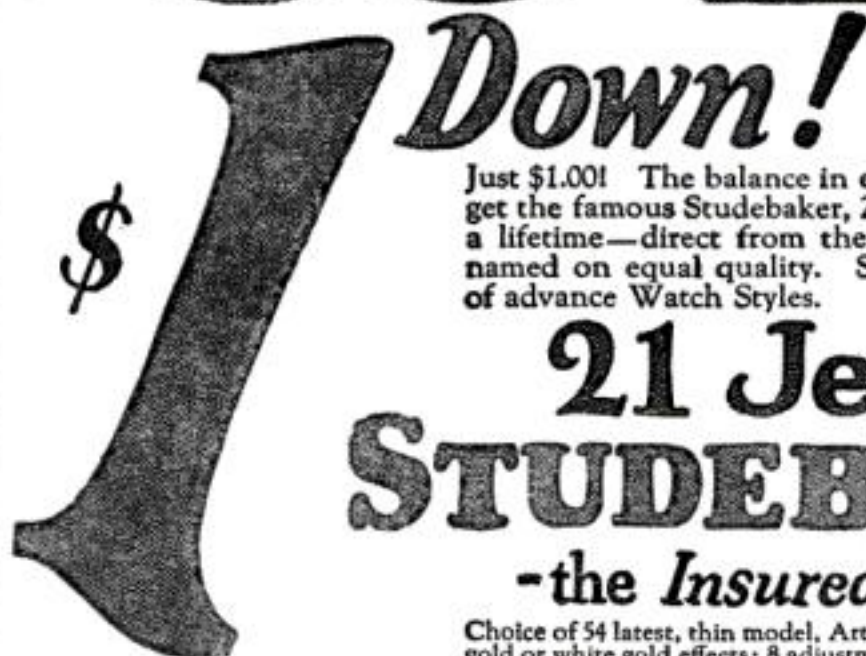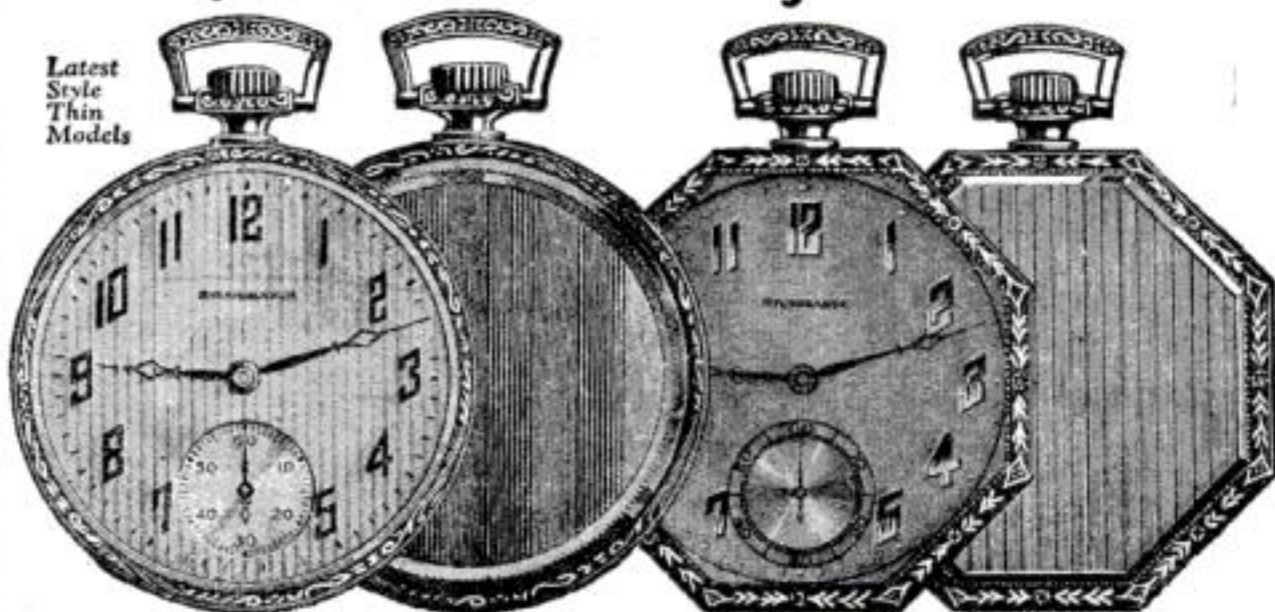

Just \$1.00! The balance in easy monthly payments. You get the famous Studebaker, 21 Jewel Watch—Insured for a lifetime—direct from the maker at lowest prices ever named on equal quality. Send at once for FREE Book of advance Watch Styles.

## 21 Jewel STUDEBAKER -the Insured Watch

Choice of 54 latest, thin model, Art Beauty Cases in yellow gold, green gold or white gold effects; 8 adjustments, including heat, cold, isochronism and 5 positions. Direct to you from the factory—the greatest watch value in America today!

**Write for Style Book!** Send at once and get a copy of this book—FREE! See the newest, beautiful, advance styles in Studebaker Art Beauty Cases and Dials. Read how you can buy a 21 Jewel Studebaker Insured Watch direct from the maker—save big money—and pay for it while you are using it. Write for our Free Book. It will post you on watch styles and watch values. Send coupon at once. Get Free Chain offer today while it lasts.

### FREE! WATCH CHAIN

For a limited time we are offering a beautiful Watch Chain FREE. Write now while offer lasts.



STUDEBAKER WATCH CO.  
Dept. H23, South Bend, Indiana  
Canadian Address: Windsor, Ontario

### Mail Coupon for Free Book

STUDEBAKER WATCH CO.  
Dept. H23 South Bend, Indiana  
Please send me your Free Book of Advance Watch Styles and particulars of your \$1.00 down offer.  
If you live in Canada send your inquiry to our Canadian office, Windsor, Ontario.

Name.....  
Address.....  
City..... State.....

☐ Check here for Ladies' Watch Folder.  
☐ Check here for Jewelry Folder.

## PATENTS

REGISTERED PATENT ATTORNEY SINCE 1905  
CHARLES W. LOVETT SECURITY BLDG. LYNN MASS.  
(SEND FOR FREE BOOKLET)

## PATENTS

TRADE-MARKS, COPYRIGHTS AND PATENT LITIGATION  
Write for advice and instructions how to proceed, costs, etc.  
Hand Book with illustrations of 100 Mechanical Movements sent free on request.  
ALBERT E. DIETERICH  
Patent Lawyer and Solicitor  
Successor to Fred G. Dieterich & Co.  
681A Ouray Bldg. WASHINGTON, D. C.

## PATENTS

As one of the oldest patent firms in America we give inventors at lowest consistent charge, a service noted for results, evidenced by many well known Patents of extraordinary value. Book, Patent-Sense, free, Lacey & Lacey, 643 F St., Wash., D.C. Estab. 1869.

## INVENTIONS Commercialized

ON A CASH OR ROYALTY BASIS  
For the INVENTOR and MANUFACTURER  
In Business 25 Years—Complete facilities—References  
ADAM FISHER MFG. CO. 183-D St. Louis, Mo.





## Prove Your Right to Popularity

**A**LL your life, perhaps, you've wanted to step out of the crowd of "listeners" and play yourself—gain good times, new friends and even fit yourself for increased income. But you have hesitated—wondering if you had talent.

Now you can know—now is provided, by the Holton Talent-Test, a new free method by which thousands are proving they can play this easiest-to-learn of all saxophones—the Holton New Revelation. Persons who never dreamed they possessed the slightest musical ability have had this hidden gift revealed to them.

Your request for booklet also brings you appointment card entitling you to the Talent-Test at any Holton dealer's studio, or in your own home with the aid of a Holton Saxophone and our copyrighted phonograph record on which the Talent-Test is recorded.

FRANK HOLTON & CO.  
Elkhorn, Wis.

America's Greatest Band Instruments

**Holton**  
New Revelation  
**SAXOPHONE**

Free Book  
—tells how  
Talent-Test  
is given



FRANK HOLTON & CO., Elkhorn, Wis. ☉  
Without obligation, I wish to determine my talent for the easy-to-learn Holton New Revelation Saxophone. (Check if interested in any other instrument):  
Cornet ( ) Trombone ( ) Baritone ( ) Trumpet ( )

Name \_\_\_\_\_

Street Address \_\_\_\_\_

Town \_\_\_\_\_

State \_\_\_\_\_

(6)

## FREE!

### Each Month—Live News of all the Latest Radio Developments

"Radio Dispatch" is an entirely new type of radio publication. It is personally edited by A. J. Haynes, Associate Institute Radio Engineers. Each month it brings you complete information on new parts, new circuits, and new accessories. "Radio Dispatch" is Mr. Haynes' personal message to his friends who depend upon him to tell them about "What's New in Radio?" "Radio Dispatch" is sent absolutely FREE to anyone interested in radio. Don't miss the next number. Send in your name and address today.

**HAYNES-GRIFFIN  
RADIO SERVICE, Inc.**

Dept. S-2  
250 W. 49th St., New York City  
111 So. Clark St., Chicago

## Henry Ford—"There Is Always Room for More"

(Continued from page 149)

airplane is coming, but it must find its place. What that place will be I shall not attempt to predict.

"CERTAINLY the airplane will not displace the automobile, cause it to disappear, for nothing ever disappears. The automobile and the tractor have not brought about the disappearance of the horse, or of the bicycle. More people are riding horseback today than ever before, and the sale of bicycles keeps well within sight of the peak figures of 25 years ago. Despite the electric light, more candles are being consumed today than at any time in the past. The new thing never entirely displaces the old. When it appears, it merely makes a readjustment necessary; then, when this is effected, with old and new occupying their places of greatest utility, the world goes on much as before, though better, of course, for the improvement that has been made.

"Everything finds its proper place in the world; every person, too, eventually. The automobile has been finding its place gradually for years. When the automobile first came, the world was not quite prepared for it; there were few roads suited to the automobile, but the automobile brought good roads, and it will bring more as they are needed.

"Just now alarm is being expressed in some quarters because the automobile, in the necessary process of finding its place, is causing traffic congestion in our large cities. You frequently hear it said that the world is approaching the 'saturation point' in automobiles. The 'saturation point,' however—the time when the world will have more automobiles than it has room for—never will be reached. You may depend on that. Just as the roads needed by the automobile have been built, and continue to be built, so the congestion that the automobile is causing will be cured, not by double-decked streets, underground roads and cellar parking spaces in the business sections of the big cities, but by the elimination of the necessity for the present crowded business sections.

"THE automobile already has had its effect on the crowded centers of population. It has enabled people to move away from them into the country. It will enable—or even force—business to move into the country, too. When the owners of big stores find that people no longer are coming to them because congestion makes it impossible, they will move out where the people have gone—into the country.

"People are becoming better educated from the automobile; they are becoming better acquainted with one another and more charitable toward one another. They are learning to avoid getting into trouble with one another. Some day it won't be necessary for big buildings where people must go to see lawyers to get them out of trouble. They won't have to go to the big buildings of the cities for other purposes either, for they will have

(Continued on page 152)



The Marshall-stat provides a means of obtaining any desired tube adjustment with absolute precision. The Marshall-stat varies the resistance, not step by step, but smoothly, continuously, and uninterruptedly from zero to maximum.

The Marshall-stat provides vernier precision throughout its entire range. Yet there is only one knob to manipulate—no double adjustment to make.

Besides its precision and ease of operation, the Marshall-stat requires only one hole in the panel, has only two terminals, can be used with any tube or combination of tubes, and is so scientifically constructed that breakage of the specially-treated Marshall discs is impossible. Compact—note full-size cut above. Can be fitted anywhere. Price \$1.75.

**MARSHALL ELECTRIC COMPANY**

3241 Locust Blvd., St. Louis, Mo.



Send for Old Man Ohm's descriptive folder on the Marshall-stat.

## Make BIG MONEY! IN RADIO

### We Need Men—Can You Qualify?

Ozarka representatives make real money because they give real values and deliver a real service. For instance, there is a 4-tube Ozarka Instrument for loud speaker operation, giving wide range of reception at \$39.50. Our men demonstrate Ozarka Instruments and install. The instrument makes the sale easy by its performance. We train you to know radio and our methods, make you worthy to wear the Ozarka button as our accredited representative. Previous experience is not necessary. In fact we prefer to do our own educating. If you have a clean record, are industrious, and have saved up a little cash, here's a real opportunity, if you can qualify for an exclusive territory. We already have 2247 representatives. Territory going fast.

### FREE, LARGE Illustrated BOOK

WRITE Today for illustrated book No. 101 that gives the entire Ozarka Plan. Don't fail to give the name of your county.

**OZARKA, Inc.**  
856 Washington Blvd.  
CHICAGO

**4 Tube Sets As Low \$39.50**





# PATENTS

## TRADE MARKS-COPYRIGHTS

### PROTECT YOUR INVENTION

**FREE**

ANY NEW article, machine, design or improvement thereof, or any combination of parts or improvements in any known article which increases its efficiency or usefulness, may be patented, if it involves invention.

### If You Have Any New Ideas

which you feel are useful, practical and novel, take prompt action to **protect your rights**. If you have invented any new machine or new combination of parts or improvement, or any new design or process, **SEND DRAWING, MODEL OR DESCRIPTION** of it for information as to procedure to secure protection.



DRAFTING and SPECIFICATION ROOM of CLARENCE A. O'BRIEN, Registered Patent Lawyer, Washington, D. C.

All communications are held in strict confidence. My personal, careful and thorough attention is given to each case. I offer you efficient, reliable and prompt service—based upon practical experience. Highest references.

### NO CHARGE FOR ABOVE INFORMATION

Write today for free books, "How to Obtain a Patent" and "Invention and Industry" and blank form "Record of Invention."

These books will give you valuable information, and they may save you much time and effort. Send for them **now**. My practice is devoted exclusively to United States and Foreign Patents and Trade Marks. Write me freely, frankly and with full confidence; it is very probable that I can help you.

Use the **Coupon** attached, and immediately upon its receipt I shall send you the form Record of Invention to be returned to me with drawing, description or model of your idea; promptly upon receiving your idea I shall write you as to procedure and costs.

## CLARENCE A. O'BRIEN

REGISTERED PATENT LAWYER

Member of Bar of Court of Appeals, District of Columbia, United States Court of Claims; Supreme Court of United States, Supreme Court District of Columbia.

PRACTICE CONFINED TO PATENTS, TRADE MARKS AND COPYRIGHTS

### FREE COUPON


CLARENCE A. O'BRIEN, REGISTERED PATENT LAWYER  
889B Security Savings and Commercial Bank Building  
Directly across Street from Patent Office, Washington, D. C.

Please send me your free books, "How to Obtain a Patent" and "Invention and Industry" and blank form, "Record of Invention," without any obligation on my part.

Name .....

Address .....

IMPORTANT—WRITE OR PRINT NAME CLEARLY.

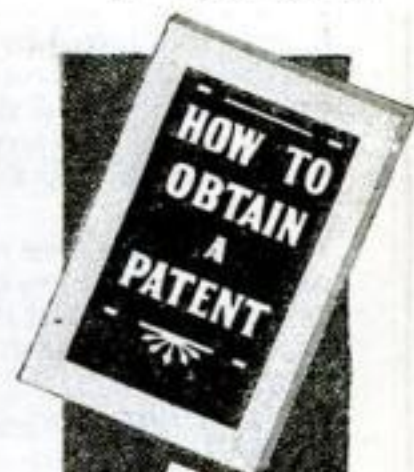

These Books FREE



## PATENTS— and Patents

It is not unusual to find an inventor who believes that the degree of protection afforded by a patent depends upon the merit of the invention.

Such is not the fact.

The strength of a patent lies in the breadth of the claims that have been allowed by the Patent Office. These in turn depend upon the care and skill with which they have been prepared and prosecuted by the patent attorney.

Trademarks are even more valuable than patents in many cases. It is essential that their registry be placed in expert hands.

The standing of Munn & Co., identified with the publication of the "Scientific American," has been earned in a continuous practice of nearly eighty years before the Patent Office. The facilities and resources they have accumulated in that time are at the disposal of individuals and business houses at fees that are as moderate as conscientious service will allow.

Write for Munn & Co.'s book on Patents. A succinct and accurate booklet of information on Patents, Designs, Trademarks, Foreign Patents, Copyrights, Labels and Patent Office Practice. It also describes the methods and the terms of Munn & Co.

## MUNN & CO. PATENT ATTORNEYS

EST. 1846  
683 Woolworth Bldg., New York City  
522 Scientific American Bldg.  
Washington, D. C.  
411 Tower Bldg., Chicago, Ill.  
364 Hobart Bldg., San Francisco, Cal.  
219 Van Nuys Bldg., Los Angeles, Cal.

## PATENTS Secured

Trade Marks Registered  
Radio Inventions A Specialty  
Write Us

## MASON, FENWICK & LAWRENCE

Patent and Trade Mark Lawyers

Washington, D. C. New York Chicago  
Established over 60 Years

References: National Confectioners' Association, Chicago; National Canners' Association, Washington, D. C.; Life Savers, Inc., Port Chester, N. Y.; Bon Ami Co. and U. S. Cigar Co., New York City; Hershey Chocolate Co., Hershey, Pa.; Stephen F. Whitman & Son, Philadelphia, Pa., and many others.

## Henry Ford—"There Is Always Room for More"

(Continued from page 150)

everything sufficient for their needs close by them in the country. Then there won't be any big buildings, any crowded places at all."

THIS may seem like a fanciful theory. If you live in a large city, even if you merely work in a large city and commute to the country, you'll find it rather difficult to imagine that city some day becoming like its present suburbs. And yet Henry Ford sees this idea exemplified, partly anyway, in his own organization. More than 5000 automobiles, owned by Ford employees, are parked at the River Rouge plant every day, bearing eloquent testimony to the fact that men may motor to their work from as far as 25 miles away without inconvenience.

About the Highland Park plant, six miles approximately from the center of Detroit, there has grown up an industrial community, where stores, shops, banks, theaters and schools make it unnecessary for Ford employees ever to visit the city itself unless they wish. The Ford plan of establishing small industries in rural sections where there are water-power sites already has proved the practicability of linking industry and the farm by supplying farm labor with gainful work between the harvest and planting seasons.

Henry Ford is reputed to be the world's richest man, and the whole world, in consequence, has found its way to his door. You frequently hear it said that Henry Ford is not a philanthropist; that he has not followed the lead of other great industrial leaders in giving large sums to charity. Whether you look on him as a philanthropist depends entirely on how you define the word. He believes that the self-respecting man does not want gifts, but an opportunity to pay his own way; and that is the form that his philanthropy has taken.

HE PAYS the workers in his coalfields from 15 to 20 per cent more than the scale for miners. No worker in his factories receives less than five dollars a day and that only during a 30-day period of training, after which he receives a minimum of six dollars and is transferred from department to department, if necessary, until there is found for him a job at which he can make good.

At the Henry Ford Trade School, boys, who because of educational deficiencies would be likely to remain common laborers, are given a chance to finish their schooling while they earn money and learn a trade. At the \$8,000,000 Henry Ford Hospital the best available medical and surgical treatment is offered to all who are ill at a flat rate.

How much the average American workman has benefited through the widespread adoption of the once revolutionary Ford idea of paying the highest possible wages and carrying on an extensive program of welfare work it would be impossible to estimate.

Mr. Ford told me about another intensely practical form of philanthropy

(Continued on page 154)

## BUY DIAMONDS DIRECT

from Jason Weiler & Sons  
of Boston, Mass., one of America's leading Diamond Importers  
and Save 20 to 40%

For over 48 years the house of Jason Weiler & Sons, of Boston, has been one of the leading diamond importing concerns in America selling to jewelers. However, a large business is done direct by mail with customers at importing prices! Here are several diamond offers—direct to you by mail—which clearly demonstrate our position to name prices on diamonds that should surely interest any present or prospective diamond purchaser.



1 carat, \$145.00

This one carat diamond is of excellent brilliancy. Mounted in Tiffany style 14K solid gold setting. Order this diamond, take it to any expert, make any comparisons you wish—if you are not entirely satisfied your money will be returned at once without a quibble. Our price direct to you - \$145.00



Ladies' White Gold Diamond Ring - \$75.00

Perfectly cut blue white diamond of exceptional brilliancy with four smaller, perfectly cut, blue white diamonds on the sides. The ring is 18K solid white gold, beautifully pierced and carved.

A few weights and prices of other diamond rings:  
3/4 carat, \$31.00 | 1/2 carat, \$73.00 | 2 carats, \$290.00  
5/8 carat, 50.00 | 1 carat, 145.00 | 3 carats, 435.00

We refer you as to our reliability to any bank or newspaper in Boston

If desired, rings will be sent to any bank you may name or any Express Co. with privilege of examination. Our diamond guarantee for full value for all time goes with every purchase.

WRITE TODAY  
FOR THIS  
VALUABLE  
CATALOG  
FREE ON

"HOW TO BUY  
DIAMONDS"

This book is beautifully illustrated. Tells how to judge, select and buy diamonds. Tells how they mine, cut, and market diamonds. This book showing weights, sizes, prices and quantities of a Million Dollars' worth of Diamonds, is considered an authority.



Write  
for  
your  
copy  
today  
Free

Jason Weiler & Sons

372 Washington Street Boston, Mass.  
Corner of Washington and Franklin Streets  
Diamond Importers since 1876  
FOREIGN AGENCIES: Amsterdam, London and Paris

## U.S. PATENTS



SEND FOR  
THIS FORM

## DON'T LOSE YOUR RIGHTS TO PATENT PROTECTION

Before disclosing your invention to anyone send for blank form "EVIDENCE OF CONCEPTION" to be signed and witnessed. A sample form together with printed instructions will show you just how to work up your evidence and establish the same before filing application for patent. As registered patent attorneys we represent hundreds of inventors all over the United States and Canada in the advancement of inventions. Our schedule of fees will be found reasonable. The form "Evidence of Conception," sample, instructions relating to obtaining of patents and schedule of fees sent upon request. Ask for them, —a post card will do.

PATENTS AND TRADE MARKS  
LANCASTER & ALLWINE

Registered Patent Attorneys in U. S. and Canada

274 Ouray Bldg.  
WASHINGTON, D. C.

Originators of forms "Evidence of Conception."



# PATENTS TRADE-MARKS AND COPYRIGHTS

## OUR OFFER:

### Your first step

Before disclosing an invention the inventor should write for our blank form "RECORD OF INVENTION." This should be signed, witnessed and returned to us together with model or sketch and description of the invention for examination and instructions.

NO CHARGE FOR THE ABOVE INFORMATION

### Our Four Books Mailed Free to Inventors

*Our Illustrated Guide Book*

### HOW TO OBTAIN A PATENT

Full instructions regarding U. S. Patents. Our Methods, Terms, and 100 Mechanical Movements illustrated and described.

### OUR TRADE MARK BOOK

Shows value and necessity of Trade Mark Protection. Information regarding Trade Marks and unfair competition in trade.

### OUR FOREIGN BOOK

We have Direct Agencies in Foreign Countries, and secure Foreign Patents in shortest time and at lowest cost.

### Progress of Invention

Description of World's Most Pressing Problems by Leading Scientists and Inventors

ALL COMMUNICATIONS AND DATA STRICTLY CONFIDENTIAL  
INTERFERENCE AND INFRINGEMENT SUITS PROSECUTED



Private Office, Victor J. Evans, with View of Patent Office Through Window

Highest References Prompt Attention Reasonable Terms  
**VICTOR J. EVANS & CO., Patent Attorneys**

Main Offices: 760-9th Street, N. W., Washington, D. C.  
Gentlemen: Please send me FREE OF CHARGE your books as described above.

**FREE  
COUPON**

Name.....  
Address.....



New York Office  
Suite 1007 Woolworth Bldg.



Philadelphia, Pa., Office  
Suite 714-715 Liberty Bldg.



Washington, D. C., Office  
Victor Bldg.



Chicago, Ill., Office  
Suite 1114 Tacoma Bldg.



Pittsburgh, Pa., Office  
Suite 514, Empire Bldg.



San Francisco, Cal., Office  
Suite 1010 Hobart Bldg.





## Why Many Men Are Old at 40

By Byram C. Kelly, A.M., L.L.D.

I am past 40 myself. I had begun to wonder when I would begin to break—to lose my old-time pep and aggressiveness—when through a mutual friend I made the personal acquaintance of a certain member of the American Association for the Advancement of Science, whose wonderful work I had heard of. I made a trip to his laboratories and the things I learned should interest every man approaching or past the prime of life. Surprising as it may seem, nearly two-thirds of all men past a certain middle age suffer with a disorder of an important gland.

### Common Middle Age Ailments

Here is an important cause for many conditions which heretofore have been taken for granted as old-age ailments—sciatica, aches in the back, legs and feet, frequent nightly risings, nervousness and irritability, and frequent dizzy spells, indicating high blood pressure. Constipation, headaches and depressed spirits often go along with it. But my visit would have been in vain had I not learned of an amazing treatment that relieves this trouble—a treatment that reaches this gland directly—and is so convenient that anyone can apply it in his own home.

### 100,000 Men Find Relief

I know too plainly the effects of gland disorder when it is allowed to continue unabated. I know of the operations and the common saying among many that the average life after this operation is only two or three years. That is why I am doing everything possible to let people know of this important discovery. Statesmen, bankers, lawyers, doctors, men from every walk in life have used the method with success. I have read hundreds of letters from gratified men. One I remember in particular was from a Colorado man which says: "73 years young is my age. Yet for years I suffered with this gland trouble. Used medicine to no avail—had about given up hope when a doctor recommended your treatment." Just think of a man 73 years old restored to the health and buoyancy of youth—without drugs, electric rays or books.

### All Explained in Free Book

If you have this trouble, if you suffer with any of the ailments mentioned above, you should not lose a day in finding out about this wonderful new method. Send immediately for an interesting, free book called, "Why Many Men are Old at 40." It describes this splendid treatment and shows you how you may regain much of your youthful vigor. Send your request to the Electro Thermal Company, 4042 Main Street, Steubenville, Ohio, the concern that is distributing these books for the author. There is no obligation. If you are not interested yourself, you may be able to do an "older" friend an immeasurable benefit by showing him this article. Western Office: Dep. 40-G, 711 Van Nuys Bldg., Los Angeles, Calif.

## Henry Ford—"There Is Always Room for More"

(Continued from page 152)

he is about to institute. As a motor manufacturer he has learned that an efficient engine is produced only by use of the best materials, and is kept running efficiently only by use of the best fuel and lubricating oil. He believes—and his opinion is substantiated by leading scientists—that something similar may be true of the human engine.

"I BELIEVE," he said, "that most human ills are directly traceable to food. In manufacture you cannot make your product better than the materials you put into it, and food supplies the materials from which the human body is built up. From proper food a strong body comes, from improper food a weak body. In epidemics some people become sick, others equally exposed, do not. The reason, I believe, is to be found in the differences in physical constitution of the various people, due to the kind and quality of the food they are accustomed to eat.

"Our organization is preparing to tackle this all-important food problem, and to solve it. In our laboratories we have the facilities to perform the necessary research, and through our organization we have the means of applying the knowledge gained in the laboratory and placing information on the food question where it is needed."

Despite the enormous demands that the mere routine of his position make upon him, Mr. Ford finds time to devote himself to a wide range of personal interests. You read, no doubt, how he purchased, renovated and restored a picturesque old inn in New England. He is doing the same thing now to an old inn about 16 miles from Detroit. He is making a collection of old American music and musical instruments. He has a remarkable collection of old American carriages and other vehicles—the "one-hoss shay," the mail coach, and so on.

THESE, he believes, are the documents from which the present generation should learn of the past. That is what he meant when he said recently that history was "bunk." What he meant was history as written, colored, and amplified by personal opinion and unfounded legends.

It may interest you to know whom Henry Ford considers the world's greatest scientists. These are the names he himself selected to be carved above the entrance to the new Experimental Laboratory nearing completion at Dearborn, near Detroit:

Darwin, Ampere, Da Vinci, Franklin, Fulton, Whitney, Bell, Marconi, Wright, Burbank, Edison, Burroughs (John Burroughs, naturalist), Kirby (Frank E. Kirby, naval architect, still living at Detroit), Diesel, Faraday, Curie, Otto, Newton, Dunlop (inventor of the pneumatic tire), Pasteur, and Galileo.

That probably would not be your list. I know it would not be mine. But it is Henry Ford's—individual and characteristic, as is everything he does.



## \$3 brings genuine UNDERWOOD

Yes, only \$3 down puts this genuine standard Shipman-Ward Rebuilt Underwood in your home. Then—small monthly payments, or if convenient, pay cash. Either way you get the world's standard typewriter at a big cash saving.

### WHY PAY RENTAL?

Think of it! You pay little more than rental, and the machine is yours! We offer the same three models of the Underwood Typewriter which are being made and sold by the Underwood Company today. The only difference is that Shipman-Ward machines are priced lower and are rebuilt like new by experts. You can't tell them from brand new machines. Visible writing—the FULL LINE of typewriting is visible at all times. STANDARD 4-ROW SINGLE SHIFT KEYBOARD. Two color ribbon, back spacer, stencil device, automatic ribbon reverse, tabulator, etc.

### TEN DAYS' FREE TRIAL

See for yourself! Try the typewriter ten days. You must be satisfied or the entire transaction won't cost you a penny. Act today. Get our big illustrated catalog and full particulars. Write NOW.

### FREE TRIAL COUPON

Typewriter Emporium  
SHIPMAN-WARD MFG. CO.

2142 Shipman Bldg., CHICAGO

Send by return mail Bargain Offer No. 2142, of a Standard Visible Writing Underwood. This is not an order and does not obligate me to buy.

Name .....

Street or R. F. D. No .....

Postoffice..... State.....

## PATENTS

### To the Man With an Idea

I offer a most comprehensive, experienced, efficient service for his prompt, legal protection and the development of his proposition.

Send sketch, or model and description, for advice as to cost, search through prior United States patents, etc. Preliminary advice gladly furnished without charge.

My experience and familiarity with various arts, frequently enable me to accurately advise clients as to probable patentability before they go to any expense.

Booklet of valuable information and form for properly disclosing your idea, free on request. Write today.

**RICHARD B. OWEN**  
Patent Lawyer

6 Owen Building, Washington, D.C.  
2276-D, 41 Park Row  
Cortland 0721 New York City



## Two-Cent Trails of Peril

(Continued from page 53)

and shelter. His frozen body was found by the roadside. For the first time in his long career he had failed to deliver the mails.

Dreahn's case may be taken as typical of the perils of the postal trail. A tragic companion picture is afforded by the fate of more than one carrier on the star route between Rocky Bar and Atlanta, in Idaho. The journey is made on snowshoes, for no ordinary vehicle could complete the journey. Traveling afoot, the man with his 50-pound burden of mail is at the mercy of the storm.

**I**N THIS part of the Idaho mountains the avalanche is a frequent visitor, moving with a force from which there is no escape. Postal records show that a number of carriers have been buried in these monster slides. One of last year's victims was missing for months. Half a year after his disappearance, the carrier's body was found where he had been engulfed by the snow. His mail bag lay at his side.

On the coast of Oregon there is a mail route that is made especially dangerous by the tides of the Pacific. Between Otter Rock and Newport this route follows the beach beneath a line of rugged cliffs. Carriers are supposed to traverse this stretch at low tide, but sometimes the carrier is caught by the rising tide. At such times he faces the danger of being dashed against the cliffs by the rush of waters, and can escape only by scaling the rocks. Many carriers have had narrow escapes on this route.

Utah has a mail route on which the winter problems are extremely marked. Heavy snows and deep drifts formerly made the mountain roads impassable for a good part of each year. Blockades of mail wagons were common.

**T**HIS condition prevailed until the introduction of the high-powered motor-truck. With this vehicle the Post Office Department has found it possible to buck the drifts and keep the route open throughout the winter.

Expensive? Of course. This route, from Price to Vernal, is the costliest star route in the United States. To carry the mails between the two offices involves an annual outlay of something like \$100,000. The distance is 121 miles. In a case of this kind, however, the government does not count the cost. The people of the isolated mountain regions are entitled to their mail as much as the city folk.

On many of the star routes airplanes would seem to offer solution of problems with which the postal authorities have fought from the beginning of the mail service. Winter air passage across the Rocky Mountains already is regarded as a foregone conclusion in connection with the air-mail between New York and San Francisco. Plans for this route contemplate service every day in the year. Mountain storms and surface blizzards are to be disregarded. There seems to be no reason why similar defiance of the elements could not be practised on the shorter dangerous routes.

# \$1662<sup>00</sup> Earned IN ONE SEASON

## A NEW BUSINESS—BIG BUSINESS

A Business to Enthuse Over—

### The "Ideal" Lawn Mower Sharpener

A wonderful invention that sharpens lawn mowers scientifically—quickly—perfectly; does the work as nothing else can.

Fred C. Milkert of Melrose Park, Ill., writes:

"The Ideal Lawnmower Grinder put me in business, starting in the basement of my home and forcing me now for the third time to move into bigger quarters. Today the dream of my life—a shop of my own—is realized. With a machine like yours and a little hustle any man can have a business of his own and be independent."

### You Start Now

No town is too small. Lawn mowers are dull—owner doesn't know where to get them sharpened. Mowing the lawn dreaded because of dull or improperly sharpened mower. Lawn mowing is healthful, invigorating and pleasant when Mower is "Ideally" sharpened. You do the work scientifically—you are in big demand.

W. F. Kandt, 1476 Main St., Buffalo, writes:  
I sharpened 994 lawn mowers last season, and the receipts were \$1662 which is not bad for a side line.



### Lawn Mowers Sharpened to Razor Edge—

People glad—owners delight in mowing lawn with mower sharpened on an "Ideal." Mower runs light—click-click-click and the grass is cut. Build permanent business for yourself. Start now!

### Write Today

Get our proposition Free. We have detailed illustrated book to send you. Write today for our proposition.

**USE THIS — MAIL IT TODAY**  
The Fate-Root-Heath Company  
802 Bell St., Dept. 39, Plymouth, O.  
Please mail at once details of your complete proposition.

Name.....  
Address.....

The Fate-Root-Heath Company  
Dept. 39, 802 Bell St., Plymouth, O.



## Wear this Shirt and Earn \$75 to \$100 A Week

With or without experience, you can easily earn \$75 to \$100 a week

taking orders for the famous FASHION WEAR shirts. Wear one of them and show to your friends. Every man a customer. Finest quality at low factory prices. Sales quick and easy. Some salesmen are earning as high as \$175 a week. We send you Free complete sample outfit with wonderful swatches. You take the order. We deliver.

**START NOW** and build a permanent, profitable and fascinating business of your own. Collect your profit in advance and always have money. These remarkable shirts are selling amazingly fast, and sales are good all year round. We help you sell and give you a fair share on every shirt sold. If you really want the best money-making work anywhere write immediately for full information. Act before someone else grabs the rich territory that you can have. A post card will do. Address

Charles Hope, THE FASHION WEAR CO.  
1200-20 Jackson St., Dept. 72, Cincinnati, Ohio

## How to Build ULTRADYNE MODEL L-2

32 page illustrated book with detailed instructions on drilling, wiring, assembling and operating Model L-2 Ultradyne Receiver. Latest authentic edition by R. E. Lacault, A.M.I.R.E., inventor of the Ultradyne, the most selective receiver known. Write for descriptive circular.

PHENIX RADIO CORP.  
57-9 Beekman St., N. Y.




## INVENTORS PROTECT YOUR IDEAS

Send for our Guide Book, HOW TO GET A PATENT, and Evidence of Invention Blank, sent Free on request. Tells our terms, methods, etc. Send model or sketch and description of your invention for our Instructions. No Charge for the Above Information.

**RANDOLPH & CO.**  
Dept. 130. Washington, D. C.

NAME.....  
STREET.....  
CITY.....STATE.....



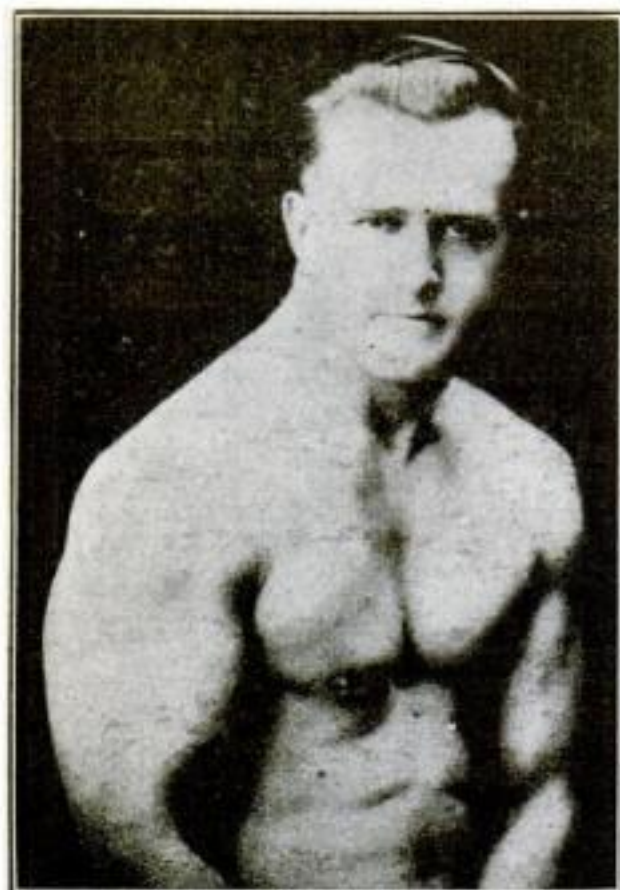

EARLE E. LIEDERMAN  
The Muscle Builder

## A Wart On Your Nose

would not be noticed nearly as much as a frail, weak body. Yet, if you had a wart on your nose, you would worry yourself sick—you would pay most any price to get rid of it. But what about that body of yours? What are you doing to make people admire and respect you? Wake up! Come to your senses! Don't you realize what a strong, robust body means to you? It makes no difference whether it be in the business or social world—everybody admires the strong, robust fellow—everyone despises the weakling.

### I Will Transform You

I make weak men strong. That's my job. That's why they call me "The Muscle Builder." I never fail. A bold statement, but true. I don't care how weak you are, I can do the trick. The weaker you are, the more noticeable the results. I've been doing this for so many years, it's easy now. I know how.

In just thirty days, I'm going to put one full inch on those arms of yours. Yes, and two inches on your chest. But that's nothing. I've only started. Now comes the real work. I'm going to broaden your shoulders and strengthen your back. I'm going to deepen your chest so that every breath will literally penetrate every cell of your lungs, feeding them with rich life-giving oxygen. You will feel the thrill of life glowing throughout your entire system. I'm going to tighten up those muscles in and around your heart, kidneys and stomach. I'm going to shoot a quiver up your spine so that you will stretch out your big brawny arms and shout for bigger and harder tasks to do. Nothing will seem impossible.

Sounds good, doesn't it? You can bet your Sunday socks it's good. It's wonderful. And the best of it is, I don't just promise you these things—I guarantee them. Do you doubt me? Come on then and make me prove it. That's what I like.

Are you ready? Atta boy! Let's go.

Send for my new 64-page book  
"MUSCULAR DEVELOPMENT"  
It is FREE

It contains forty-three full page photographs of myself and some of the many prize-winning pupils I have trained. Many of these are leaders in their business professions today. I have not only given them a body to be proud of, but made them better doctors, lawyers, merchants, etc. Some of these came to me as pitiful weaklings, imploring me to help them. Look them over now and you will marvel at their present physiques. This book will prove an impetus and a real inspiration to you. It will thrill you through and through. All I ask is ten cents to cover the cost of wrapping and mailing and it is yours to keep. This will not obligate you at all, but for the sake of your future health and happiness, do not put it off. Send today—right now, before you turn this page.

EARLE E. LIEDERMAN  
Dept. 1302 305 Broadway New York City

EARLE E. LIEDERMAN  
Dept. 1302, 305 Broadway, New York City

Dear Sir:—I enclose herewith 10 cents for which you are to send me without obligation on my part whatever a copy of your latest book, "Muscular Development." (Please write or print plainly.)

Name.....  
Street.....  
City..... State.....

## First Aid for Your Family

(Continued from page 54)

cold, and by its use sometimes one is enabled to relieve the discomfort and to get a fair night's sleep. In the use of drugs such as this, for the relief of headache and pain generally, it must be remembered that repeated doses at short intervals are unwise and even may be dangerous.

For the treatment of skin inflammation caused by poison ivy or poison oak, sometimes simple home remedies give relief. The best of these is a thorough scrubbing with kitchen soap and a soft brush and warm water, followed by the application of some soothing ointment such as zinc ointment or chloramine-T paste.

THERE should be included in the medicine cabinet a harmless stimulant for the treatment of fainting not due to an organic cause, nervousness, or giddiness. Such a stimulant is aromatic spirits of ammonia. This may be inhaled as a quick stimulant or, diluted with water, it may be drunk for a more lasting effect.

Where there are children and adolescents, nose-bleed and other slight external hemorrhages frequently occur and require home treatment. Bleeding from the nose usually may be stopped very effectively by the use of agents that produce a normal clot. Such an agent is thromboplastin, prepared from tissues of animals that are richest in the clot-promoting elements. A pledget of sterile cotton or a piece of gauze saturated in thromboplastin and placed in the nose in case of nosebleed, or into the cavity of an extracted tooth, will stop ordinary bleeding almost instantly.

We have been hearing a lot in the past year or so about vitamins and how necessary it is that we should get a sufficient amount of them by a properly diversified diet; but the difficulty has been to get people to take a diet that is sufficiently diversified and adequate to supply the needs of the body in this respect.

This has been particularly the case with those vitamins called the "fat soluble vitamins," which are concerned with the normal growth of children, and the prevention of rickets.

THE two most concentrated sources of these vitamins are good butter and cod liver oil, but not emulsions of cod liver oil. The best cod liver oil contains more than 100 times more fat soluble vitamins than does the best quality of creamery butter, and should therefore be included in every medicine cabinet of those homes where there are children. Regular courses of cod liver oil should be given three or four times a year to insure that the growing child receives the necessary amount of the fat soluble vitamins.

There should be added a supply of a good dental cream free from gritty abrasives and with little or no soap; cold creams, zinc stearate, talcum and nursery powder for the baby; also a supply of sterile bandages and gauze of assorted sizes, and a good clinical thermometer.

The householder should never lose sight of the important fact that the contents of the medicine cabinet are intended only for the relief of symptoms the severity of which apparently do not require the services of a physician.

## Squab Book FREE



Squabs selling at highest prices ever known. Greatest market for 20 years. Make money breeding them. Raised in one month. We ship everywhere our famous breeding stock and supplies. Established 24 years. Write now for big illustrated free book, How to Make Money Breeding Squabs. **PLYMOUTH ROCK SQUAB CO.** 616 H St., Melrose Highlands, Mass.

## FORD RUNS 57 MILES ON GALLON OF GASOLINE

A new automatic and self-regulating device has been invented by John A. Stransky, 4339 Fourth St., Pukwana, South Dakota, with which automobiles have made from 35 to 57 miles on a gallon of gasoline. It removes carbon and reduces spark plug trouble and overheating. It can be installed by any one in five minutes. Mr. Stransky wants distributors and is willing to send a sample at his own risk. Write him today.—Adv.

## Motorcycle Bargains

SAVE 25% to 65% on Slightly Used and Rebuilt Motorcycles, Acc. Indian, Excelsior, Harley-Davidson, Cleveland, Side Cars, Johnson Motor Wheels, Evans Power Cycles, Bicycles. Send for Free Bargain Bulletin and Money Saving Message, listing hundreds of bargains in used, rebuilt and new machines, supplies, accessories, etc. **AMERICAN MOTOR CYCLE CO.** Dept. 228 2047 W. Chicago Ave. CHICAGO



## "LIGHTING FIXTURES"

Ready to hang. Direct from the manufacturer. Completely wired including glassware. Send for Catalogue No. 26 (Just off the press) Special proposition to Dealers **ERIE FIXTURE SUPPLY CO.** Desk A. Erie, Pa.

## DEAFNESS IS MISERY



I know because I was Deaf and had Head Noises for over 30 years. My invisible Anti-septic Ear Drums restored my hearing and stopped Head Noises, and will do it for you. They are Tiny Megaphones. Cannot be seen when worn. Effective when Deafness is caused by Catarrh or by Perforated, Partially or Wholly Destroyed Natural Drums. Easy to put in, easy to take out. Are "Unseen Comforts." Inexpensive. Write for Booklet and my sworn statement of how I recovered my hearing.

A. O. LEONARD, Suite 301, 70 5th Ave., New York

## Class Rings and Pins



Largest Catalog Issued—FREE Samples loaned class officers. Prices \$.20 to \$8.00 each. No order for class, society, club emblems too large or too small. Special designs made on request.

**METAL ARTS CO., Inc., 7706 South Ave., Rochester, N. Y.**



## MOVIES IN YOUR HOME

Our marvellous, practical MOVIE MACHINES sell as low as \$3.75 postpaid and use same size film as big theatres. We also have wonderful films at lowest prices—with a new film exchange service. DON'T MISS THIS! Write NOW for free catalogue **PARAMOUNT MFG. CO.** Dept. PS 7 Boston, Mass.

## LATEST WHOLESALE RADIO CATALOG

**FREE** Simply send name TODAY for big 48-page catalog of latest radio goods at Wholesale. Live dealers and agents wanted. **STANDARD RADIO CO., 104 East 13th, Kansas City, Mo.**



You've heard your neighbor praise this wonderful weekly magazine that 3 million people read. Unbiased digest of national and world affairs. Check full of just the kind of reading you want. Science, politics, travel, fun, fashions, question box, books, health—entertainment and instruction for all. Send 15c (coin or stamps) today for this big paper on trial 13 weeks or \$1 for 1 year (32 issues). **PATHFINDER, 559 Langdon St., Washington, D. C.**



## Here Are Correct Answers to Questions on Page 78

1. This is an effect of the hair cells going on strike. Instead of merely refusing to make color, they refuse to make hair at all. Poor nourishment is the most frequent cause. Scalp massage or anything that stimulates the circulation of blood in the scalp will sometimes cure baldness provided the hair cells are not dead.
2. Very few, if any, of the chemical impurities are removed by boiling. But boiling does kill the germs in the water.
3. Under ordinary conditions on the earth's surface the lightest substance known is hydrogen gas. This is why hydrogen is used to fill balloons. The helium gas, which is now replacing hydrogen for this purpose, is not quite so light as hydrogen, but possesses the great advantage of being non-explosive.
4. Because the resistance of the air is greater. The snowflake is much less compact than the raindrop. The friction of the air against it is therefore more easily able to counteract its weight.
5. Many of them have motions that we can measure by comparing their present place in the sky with their place several years ago. Others are shown by the spectroscope to be moving toward or away from the earth, this being detected by a change in the character of the light.
6. Light travels faster; it is the fastest thing in the universe. The speed of electricity depends on what it is traveling in. It may go a good many thousand miles in a second, but it never reaches light's speed of 186,000 miles a second.
7. No. The brain of an insect is not only much smaller than ours, but it is put together in a very different way. Many of the things that insects do are not controlled by the brain, but by little knots of nervous tissue in the body.
8. The radio waves are not waves in matter; they are waves in the ether, a medium that we believe fills all space even out to the most distant stars. The atoms of matter are quite open in structure, with a great deal of space between the solid parts of them. The ether is supposed to penetrate into these spaces inside atoms. Accordingly the radio waves go right through the atoms of matter.
9. No. It used to be thought that certain foods, especially fish and other foods containing phosphorus, were especially valuable for the gray matter of the brain. But it is known now that brain cells apparently use the same food materials as all other living cells. The best way to feed your brain well is to keep your body in good health.
10. A parrot happens to have a set of vocal cords and a formation of the throat capable of imitating many sounds, including human speech. There is no reason to believe that parrots ever understand what they are saying.
11. Because it is all around us and inside of us as well as on top of us. When you hold out your hand, the air pressure on top of it is about three hundred pounds; but an equal pressure is being applied all the time to the under surface of your hand also.
12. A geyser is a kind of hot spring. There is a long tube or tunnel that reaches down into the hot rock. Water accumulates in this tube and steam pressure begins to develop at its lower end. Finally this steam pressure gets high enough to blow out all the water in the tube. This makes the geyser spout. The procedure is continuous.

### THEY SAY OF THE NEW SUPER-ZENITH:

"Greater clarity and volume. Amplification is always at a maximum in each stage for any wavelength. Three stages audio frequency amplification."

*Zenith amplifies with Thordarson!*

### THEY SAY OF THE KENNEDY:

"The Kennedy tone quality is superb; full-rounded, musically pure reproduction of any program within a good long range. No hollow tones or distortion. For the Kennedy is a musical instrument. A musician will enjoy its purity of tone."

*Kennedy amplifies with Thordarson!*

### THEY SAY OF THE MURDOCK NEUTRODYNE:

"To hear the real voice of the nation full and clear—you want volume. . . . Volume that floods your room. . . . Distant stations can be tuned in with remarkable clearness and volume."

*Murdock amplifies with Thordarson!*



## Superiority Proved!

Note the emphasis placed upon *tone quality* in the advertising of the finest sets—the sets that have Thordarson amplification. People want radios that are *musical instruments*. Leading makers are responding with sets embodying the best audio amplification. That is why *more* Thordarsons than all competitive transformers combined are now used in high-grade radios.

Is your present set disappointing? Buy a Thordarson-equipped set—or replace your audio frequency transformers with a pair of Thordarsons—or follow the lead of the leaders and build with Thordarsons. You will be delighted with the even volume they deliver over the *entire* musical range. If your dealer is sold out, you may order from us by mentioning his name. Interesting bulletins sent free. Write.

**THORDARSON ELECTRIC MANUFACTURING CO.**  
Transformer specialists since 1895  
WORLD'S OLDEST AND LARGEST EXCLUSIVE TRANSFORMER MAKERS  
Chicago, U.S.A.

Unconditionally Guaranteed

**THORDARSON**  
Super  
AMPLIFYING TRANSFORMERS  
Standard on the majority of quality sets


TYPES AND PRICES: Thordarson "Super" Audio Frequency Transformers are now to be had in three ratios: 2-1, \$5. 3½-1, \$4. 6-1, \$4.50. Thordarson Power Amplifying Transformers are \$13 the pair. Thordarson Interstage Power Amplifying Transformer, \$8. Write for latest hook-up bulletins—free!

## Earns Big Money



**J. Gordon Says  
\$4000 Profit  
In 2 Months!  
Making and Selling  
Popcorn Crispettes**

GEORGE ALEXANDER, of Pennsylvania, made \$3,000.00 in 4 months. Ira Shook, Flint, took in \$365.75 in one day. Bram bought one outfit, then 10 more within a year. Mrs. Lane, Pittsburg, sold 8000 packages in one day. J. R. Bert, Ala., wrote, "only thing I ever bought that equaled advertisement." Patillo, Ocala, writes: "Crispettes all you claim and then some." Kellogg, \$700 ahead end of second week.

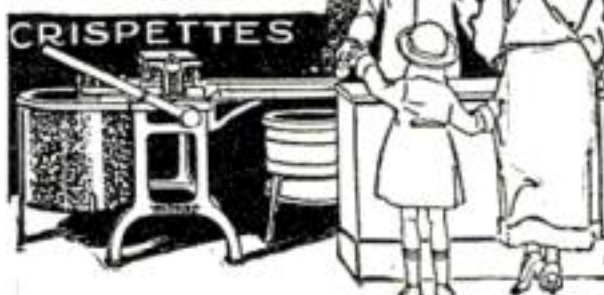

### WE START YOU IN BUSINESS!

Furnish secret formulas, raw material, and equipment. Small capital required; no experience needed.

### Build Business of Your Own

No limit to the sale of Crispettes. Everybody likes them. It's a delicious food confection made with or without sugar. Write for facts about a business that will make you independent. Start in your town.

### Profit \$1000 Month Easily Possible

Send postal for illustrated book of facts. It contains enthusiastic letters from others—shows their places of business, tells how and when to start, and all information needed. Free. Write now!


Long-Eakins Co. 247 High St. Springfield, O.

### APEX VERNIER DIAL



### It Brings 'Em In!

Get more stations—greater range—bigger volume—finer selectivity—less interference. Lasts forever. The one big advance yet made in tuning. Ratio 12 to 1. Quickly applied to any shaft. For sale by all good Radio Dealers. If unable to obtain from dealer, enclose \$2.50 for nickel-silver finish, or \$3.50 for De Luxe satin finished gold.

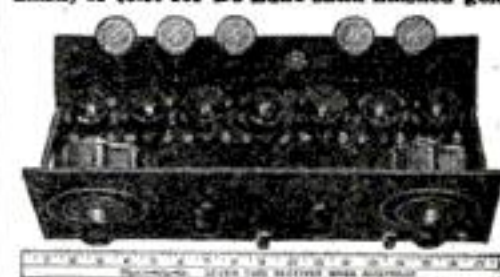


### 7-Tube Super-Heterodyne for \$97.50

Receive the parts complete to assemble your own set. Coast to coast on an 18-inch Loop. Assemble this 7-tube Microdyne super-heterodyne on a 7x18 in. panel in three hours. Parts complete, including drilled and engraved panels, condensers, sockets, transformers, dials, connecting plugs, cables, etc., with drawings, diagrams and instructions. Price of cabinet—to fit—on application. If your radio dealer cannot supply parts for complete Microdyne Radio Set, send check or money order for \$97.50 and name of your dealer.

APEX ELECTRIC MFG. CO., Dept. 203  
1410 W. 59th Street, CHICAGO



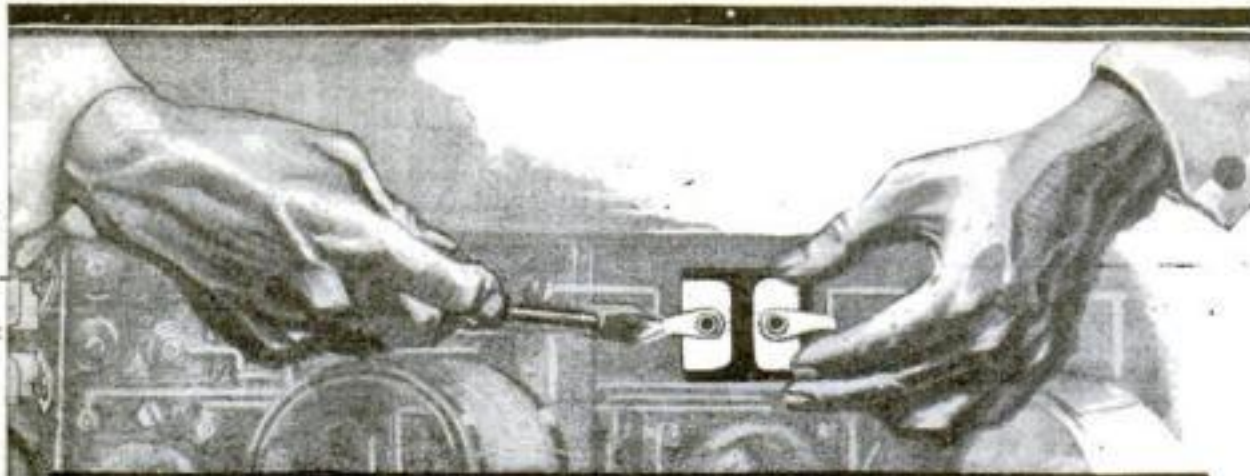

## Nine out of ten sets use MICADONS!

Nine out of every ten sets made use Micadons—the standard fixed radio condenser. Set builders choose them for many reasons.

*They know* that the Micadon is a Dubilier product, hence supreme in quality and efficiency.

*They know* that Micadons can be obtained in accurately matched capacities and that the capacity is permanent.

*They know* that Micadons are easily installed, equipped as they are with extension tabs for soldering and eyelets for set screw assembly.

*They know* that Micadons are made with type variations to meet every possible requirement.

For the best results use MICADONS.

# Dubilier

CONDENSER AND RADIO CORPORATION

## How to Get a Position with the U. S. Government

Thousands of appointments are made yearly. Good salaries—short hours—liberal vacations (as much as 30 days in some branches of the service). Positions open now in Washington and in other cities.

"Pull" and influence unnecessary. Common school education sufficient as groundwork for most positions. The International Correspondence Schools will prepare you right at home to pass your Civil Service examination with a high mark.

Mail the coupon today for 48-page Free Civil Service booklet.

INTERNATIONAL CORRESPONDENCE SCHOOLS  
Box 7639-D, Scranton, Penna.

Without cost or obligation, please send me a copy of your 48-page CIVIL SERVICE BOOKLET, which tells how I can secure a good-paying position with the U. S. Government.

Name.....

Address.....

## clean intense heat

AGENTS  
make \$25  
to \$75 a Day

### Man Alive— Look What You're Missing!

Oliver men are cleaning up. Making \$25 to \$75 a day! It's the chance of a lifetime. Don't lose another minute. Write. Big season now on. Learn how easily Oliver Oil-Gas Burners sell. Amazing invention. Burns Oil, mixed with air. Better heat than coal or wood. Fits into fire box of range or heater. Models for all types of furnaces, too. 12 models in all. Appeals instantly. Turns any range into a gas stove. Wonderful, glowing heat, at the turn of a valve. A few minutes' demonstration makes the sale.

**Yes Sir, It Sells Itself! ACT NOW!**

Every woman wants one the minute she sees it. Every buyer recommends it. Means more sales for you! The Oliver is a winner. Greatest burner ever. Saves women the drudgery of shoveling and carrying coal, building fires, scraping out ashes. Keeps furnishings clean. Priced within everyone's reach. Saves its cost a hundred times over. Can you think of anyone wanting to be without it?

## OLIVER OIL-GAS BURNER

You don't need to be a high-powered salesman. Sell only one Burner a day and you've made \$75 a week. Think of it! And we guarantee your first sale. Over 200,000 already sold. Get our Free Sample Case offer.

**OLIVER OIL BURNER CORPORATION**

Manufacturers of Oliver Oil-Gas Burner Products  
259 OLIVER BLDG. ST. LOUIS, MO.

Oldest and Largest Manufacturers of Oil-Gas Burners in the World

## Can You Pass These Tests?

(Continued from page 45)

867314	739548	382145	672539	378652
963458	371629	596743	784623	358472
345962	294736	198537	916483	635819
672389	389254	259671	123874	329418
312876	427395	561487	593182	247153
934612	759431	281937	461289	579361
954178	718254	296851	524617	731825
719325	486592	215367	714529	956142
594231	156843	436978	851763	513647
349716	182653	286415	164985	768914
714932	427163	825749	983567	682917
649752	587436	268794	179428	145389
462758	843216	853624	985273	672841
981374	529817	862934	875126	319546
941258	639187	871596	294378	237465
346521	196235	762491	957641	495867
853926	138962	435781	297568	



Solution to test in Fig. 1, page 45: How the blocks fit in the arrow. The answer to Fig. 2 is to remove the three matches within the largest triangle, leaving two triangles.

How rapidly do you learn? Below is a simple code, in which each letter of the alphabet is represented by a number. The word "and" would be written 2-13-10. In this test you are to write the code number for each letter just above it, as fast as you can while some one times you. A college student can translate 90 letters into numbers in five minutes.

### CODE

q	a	y	p	z	u	r	s
1	2	3	4	5	6	7	8
j	d	l	g	n	h	w	o
9	10	11	12	13	14	15	16
t	m	b	k	i	f	e	c
18	19	20	21	22	23	24	25
							26

Translate these letters into their corresponding numbers:

L a t h o t t s r o s c i  
f o g a t h o s d a n g s  
o n i t h t a h t o h a d  
h h e d a r n i h t o a n  
f o t e r o n o n w c e m a c  
g r n i o w d o p n u s h  
i r n e o c o i l e l c t h  
e t n i w o g h r t g a r  
d k e r h e t s t  
a r s s d e m e o c o t s  
n i k d r e p e c n i h t  
o s y k d a n d i g r w n

If you can pass these tests, you have mental capacity to spare for most of life's activities.

Remember, too, that those who make the most of their ability are the hardest workers. So work hard with your abilities if you would be successful.



## Your Dials—Keys to the Air

(Continued from page 84)

Practically all of them, however, operate on a loop aerial, consequently it is necessary to follow the instructions for placing the loop that I outlined under reflex sets. This should be done before hunting for the station.

The majority of super-heterodyne receivers have two large tuning dials on the panel. There are some trick "supers," but since they are invariably constructed by men who have a full knowledge of the theory and practice of radio, it is unnecessary to describe their operation here. They are the exception and do not come into general use. On the standard sets the first dial is for tuning to the wave length of the station desired. The second dial controls the frequency-changing device that enables the system to operate with full amplification.

**I**N TUNING a "super" it is important to move the dials very slowly, otherwise it is quite possible to pass over the proper settings. In fact, a Vernier adjustment, or a geared dial is practically necessary. It will be found that after a station is brought in and the first dial is left in its position, the second dial can be moved around until it brings in the same station at another position. Each of these two positions should be noted, and the one that gives best results used.


On the second harmonic super-heterodyne there are three and in some cases four points where the same station can be tuned in. It is best to log these settings on a card, and try them when looking for the same station again in the future. If interference is experienced at any of the settings on the second dial, go to one of the other points where the station can be heard, and see if the interference still exists. When noise is experienced while listening to a distant station, try reducing the rheostat dials.

After you get a station with the super-heterodyne or reflex set, make a final slight adjustment in the position of the loop aerial. It will be found sometimes that although the loop is pointed directly toward the transmitting station, maximum signals are not obtained. The reason may be a local one. Some mass of metal may be reflecting or refracting the waves, and thus cause a slight variation in the position of the loop. These little knacks of tuning can be mastered after a few days' operation of your set.

## Science of Cross-Words

**I**F THE cross-word-puzzle bug has bitten you, don't miss the March issue of POPULAR SCIENCE MONTHLY. You will find a fascinating story of the fad that has swept the entire country with such sensational popularity, and—an entirely new kind of puzzle to intrigue your interest.

## Why it is Better

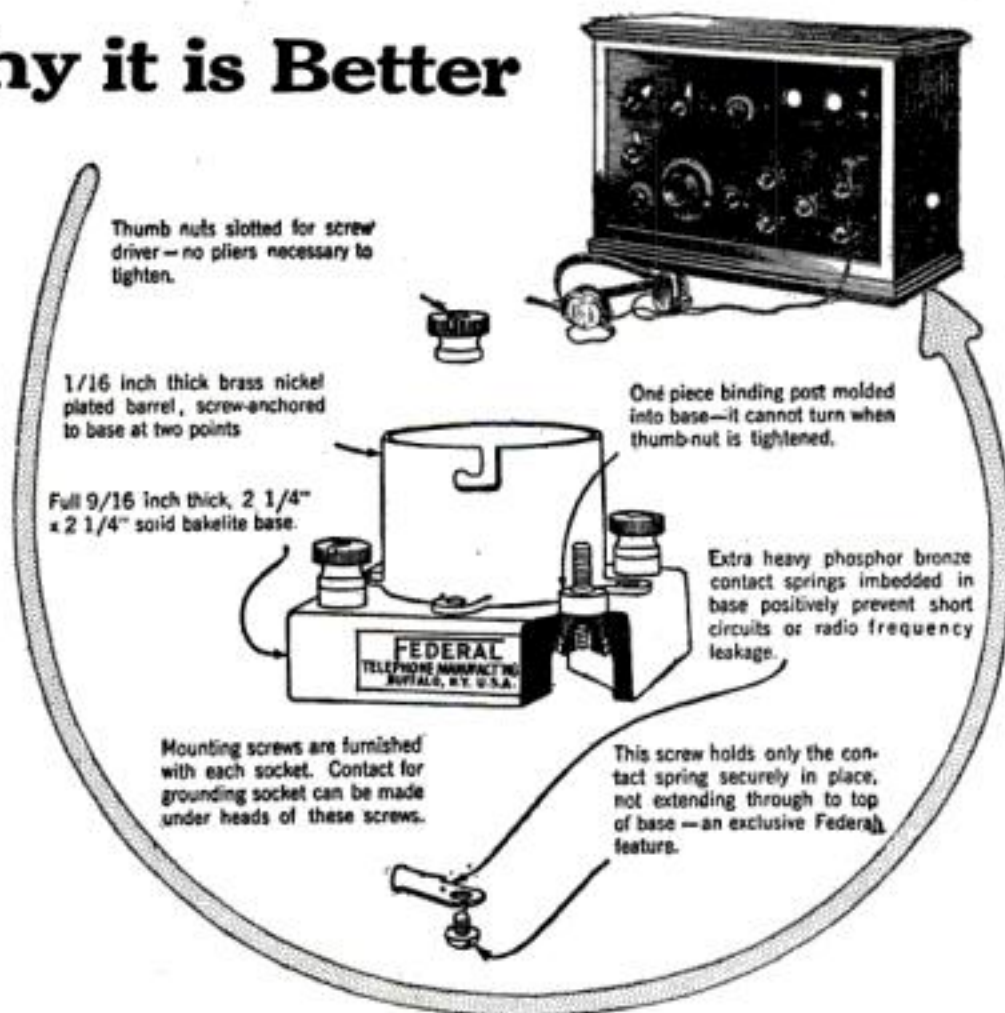

**THE** picture tells the story—seven practical, sensible reasons why Federal sockets should be in your "pet" hook-up. Federal sockets are but another evidence of the care and engineering skill used in designing and

making Federal Standard Radio Parts.

There are over 130 standard parts bearing the Federal iron-clad performance guarantee—their use means—"Balanced Circuits" with better performance.

FEDERAL TELEPHONE AND TELEGRAPH CO.  
Buffalo, N. Y.



Boston  
New York  
Philadelphia  
Pittsburgh

# Federal

Standard RADIO Products

Chicago  
San Francisco  
Bridgeburg  
Canada

## THE CROWN FUEL SAVER AND SMOKE CONSUMER

Not an oil burner  
but a scientific  
method of  
burning coal  
and coke



**20% COAL-SAVING GUARANTEED**

This inexpensive coal-saver and heat producer is a positively safe investment paying extraordinary dividends in money and comfort.


**Why pay out any more than you have to for coal?**

By simply attaching the Crown Fuel Saver to your heating plant you can burn lower quality coal, get more heat and a guaranteed fuel saving of at least 20% or your money back on demand. The Crown offers more heat, quicker heat, steadier heat, less firing, less ashes, less expense.

The Crown fits the feed door of any heating plant—steam, hot water, or warm air. Furnishes by natural draft pre-heated air to burn smoke and gases usually wasted. (See illustration.) Works automatically. Nothing to get out of order. Lasts a lifetime. Install it yourself. In successful use 10 years in homes, apartments, stores and greenhouses. Write for full information.

Crown Fuel Saver Co., 12 N. 10th St., Richmond, Ind.  
DISTRIBUTORS WANTED. Write for our profitable business building plan.

U.S.  
TOOL  
CONDENSERS



A Unique  
U. S. Tool Feature



**One Piece Stator**  
(Pat. Applied for)

Found in no other make, the one piece stator makes the U. S. Tool Condenser 100% efficient. Eliminates leakage, resistance, broken contacts and soldered joints. In types 3 (plain) and 4 (all-vernier) Celoron End Plates; types 5 (plain) and 6 (all-vernier) Metal End Plates; types featuring the Hexagon Shaft.

CS and CV low p ice types always in stock.

ASK YOUR DEALER!

**100% GUARANTEED**

Write for Literature

**U. S. TOOL COMPANY, INC.**  
127 Mechanic St., Newark, N. J.

Mfrs. of Special Tools, Dies, Jigs, Automatic Machinery and Sub Presses.



# Popularity Plus!



*Yours*-with this most winning  
of all musical Instruments

You can be popular - you can  
be in demand socially - you  
can be welcome everywhere -  
with an irresistible

## BUESCHER True Tone Saxophone

Don't be a wall-flower.  
Don't be a dawdler. Step  
out of the crowd and into the  
picture. Be able to do some-  
thing to earn your welcome.  
Learn to play a Buescher Saxo-  
phone.

**Easy to Play  
Easy to Pay**

You'll be astonished how quick  
you master this beautiful in-  
strument. It's not necessary to  
be talented - to be musically  
inclined. The Buescher Saxo-  
phone is so perfected and  
simplified that practically  
anyone can learn to play.  
The scale can be mastered in  
an hour; in a few weeks you  
will be playing popular airs.  
Practice is pleasure, because  
you learn so quickly. 6 days  
trial and easy payments.

**Free**

Send coupon or postal for a free  
copy of our latest Saxophone  
Book. Tells all about the various  
Buescher Saxophones, with pic-  
tures of the famous professionals  
and orchestras. Mention any  
other instrument in which you  
may be interested.

**BUESCHER BAND INSTRUMENT CO.**  
Everything in Band and Orchestra Instruments  
428 Buescher Block Elkhart, Ind.

Buescher Band Instrument Co.  
428 Buescher Block, Elkhart, Ind.  
Gentlemen:  
I am interested in the instrument checked below:  
Saxophone... Cornet... Trombone... Trumpet...  
(Mention any other instrument interested in)  
Name .....  
Street Address.....  
Town..... State.....

## To Do Good Soldering

(Continued from page 85)

solder on the end of the copper touches the joint.

Hold it in this position until the solder flows into the joint and over the ends of the wires, as shown in Fig. 3. Then remove the copper and hold the wires steady until the solder has cooled and hardened. Many beginners experience trouble through failure to hold the wires steady. The slightest motion at the instant when the solder hardens will result in a weak joint.

IF THE copper is too cold, the solder will not flow over the joint and the wire ends, and if it leaves the copper at all, it will form in little globes or drops that often can be rubbed off the wire with the fingers. The whole secret of soldering is to get the solder to flow on the wires like oil on a steel surface and not like drops of mercury on a glass plate.

In Fig. 4 are shown a number of soldered joints. At the left is an example of how not to do it. Note how the solder has failed to run on the surface of the metal. The second example is the joint that was actually made while the photographs used in Figs. 2 and 3 were being taken. The third and fourth show how the wires should be overlapped if there is to be any strain on them.

After you have the hang of it, you will find that it takes much less time to wire a receiving set by soldering all the connections than it does if you have to carefully form a loop at each end of every wire to clamp under the binding posts of the instruments. Also, it is easier to cut and bend the wires to the exact length when you do not have to allow for the bending of the loops.

If you use the rosin core solder, you need not worry about the excess soldering flux, since rosin is a good insulator itself and has no tendency to creep over the surface and collect dust.

When the greasy types of soldering pastes are used, it is well to use as little paste as possible and wipe off the joint carefully with a rag after each joint while the wires are still hot. If this is done, there is no choice in electrical efficiency between rosin and the usual pastes except in soldering the standard types of jacks that use fiber strips between the contact fingers.

IT SEEMS to be almost impossible to solder these jacks with ordinary soldering paste without having some of the paste run up the lugs and soak into the fiber. This makes a messy looking job and in many cases actually causes leakage losses.

Do not be afraid to tackle soldering. Ten minutes' practice will teach you the knack of it and after that you will wonder why you thought it was so hard!

HOW to build a two-tube radio set that will produce plenty of loud-speaker volume without distortion will be described in an article next month—

This is a truly remarkable radio set, nevertheless one that you will find very easy to construct.



**Real  
Radio  
Reception**

**Cunningham  
RADIO TUBES**

place the skill, experience and resources of the great General Electric Laboratories in every socket of your receiving set.

Since 1915—Standard for all sets types C-301A, C-299, C-300, C-11, C-12. In the Orange and Blue Carton. Price \$4.00 each.

**Patent Notice:** Cunningham tubes are covered by patents dated 2-18-08, 2-18-12, 12-30-13, 10-23-17, 10-23-17, and others issued and pending.

Cunningham 40-page data book fully explaining care and operation of Radio Tubes now available by sending 10c in stamps to San Francisco Office.

*R. J. Cunningham Inc.*

HOME OFFICE: SAN FRANCISCO CHICAGO NEW YORK

## YOU TOO CAN PLAY THE HAWAIIAN GUITAR

JUST AS THE HAWAIIANS DO  
PLAY ALL THE LATEST HITS

**FREE!  
THIS  
\$15**

**HAWAIIAN  
GUITAR**



**ONLY 4  
MOTIONS**  
used in playing  
the fascinating  
Hawaiian Guitars.  
Our native  
Hawaiian instructors  
teach you to master them  
quickly. Pictures show how.  
Everything explained clearly.

**PLAY IN HALF HOUR**  
After you get the 4 easy motions, you can play harmonious chords with very little practice. 40,000 students have learned to play in this easy, pleasant way.

**EASY LESSONS**  
The 52 printed lessons with a great many pictures make it easy to learn quickly. You don't have to know how to read notes. No previous musical knowledge necessary. You learn to play any kind of music, and pay as you play.

**FREE GUITAR**  
As a special offer to new students we give this full size, high grade instrument free of charge. It is sent at once without red tape or delay.

**WRITE AT ONCE**  
Send your name at once and let us tell you all about the 52 easy lessons and the free guitar. You have everything to gain. Don't put it off. A post card will do. Ask for new special offer and easy terms.

**First Hawaiian Conservatory of Music, Inc.**

235 Broadway (Woolworth Bldg.) Dept. 46, New York, N. Y.

Special courses on Violin, Tenor-Banjo, Banjo-Ukulele and Ukulele


## PATENTS

BOOKLET FREE HIGHEST REFERENCES  
PROMPTNESS ASSURED BEST RESULTS

Send drawing or model for examination and report as to patentability

**WATSON E. COLEMAN, Patent Lawyer**  
644 G Street N. W., Washington, D. C.



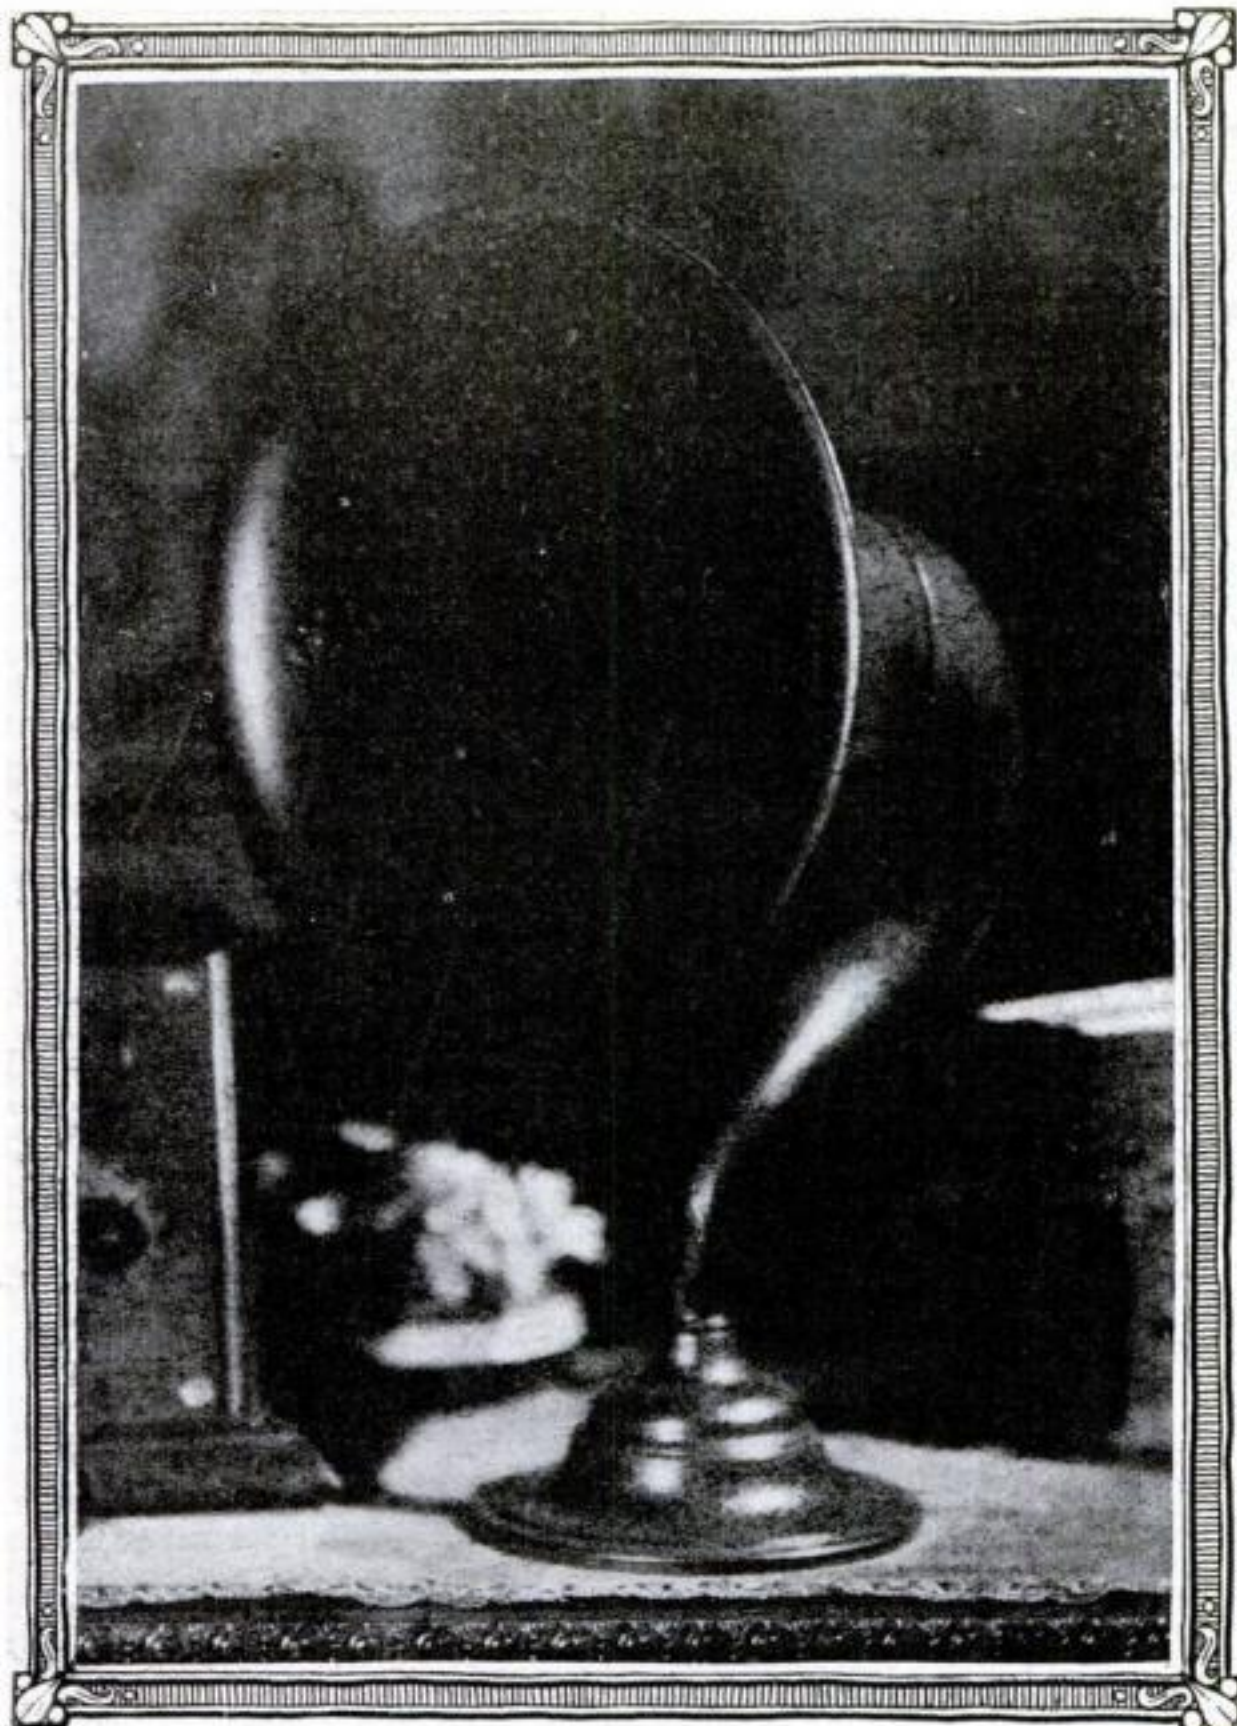

**The UTAH**  
Trade Mark Registered  
 Made In Salt Lake City

**\$25<sup>00</sup>**

**Phono-Speaker \$10.00**

**GUARANTEE**

Buy a UTAH and use it for two weeks. Compare its tone with the best others are able to produce. If the UTAH does not give at least 50% better reception, return it to your dealer and he will cheerfully refund your money.

# **NOW!** *Radio Music as You Never Heard it Before*

**Y**OU never heard such tone! You cannot guess the wonderful musical possibilities of radio reception until you hear UTAH reproduction.

Rich, mellow, natural tones of instrumental music—the delicate shadings of the human voice—satisfactory volume from a weak and distant station—or big volume from a strong station, without the rasping and blasting that big volume has always caused—that's UTAH reproduction!

The new UTAH speaker is the latest triumph of acoustical and electrical engineering—the result of two years work by the leading experts in sound reproduction.

## **Hear It!**

Go at once to your dealer's store and ask for a demonstration. Or better yet, take a UTAH home with you and enjoy it for two weeks under our unprecedented guarantee.

**UTAH Radio Products Co., 1427 Michigan Ave., Chicago**



# MAGNATRONS

large  
base



TYPE  
DC  
199



TYPE  
DC  
201A

miniature  
base



TYPE  
DC  
199

**M**AGNATRONS today are better tubes than they ever were before—and that is saying a great deal. MAGNATRONS occupy a front rank position among vacuum tubes; they know no superiors and very, very few equals.

MAGNATRONS have been changed both internally and externally. All types are now manufactured in the tipless form. This is an important feature; it greatly reduces the chances of accidental breakage. The bases, too, have been improved. Pure bakelite is used, thereby cutting down leakage and capacity.

The internal changes in MAGNATRONS make these tubes more fitted than ever for efficient radio frequency amplification and powerful audio frequency amplification without distortion. Convince yourself on this point by hooking a MAGNATRON into the circuit.

MAGNATRONS are made in three types—the DC-201A, the DC-199 with the miniature base, and the DC-199 with the large standard base.

ANY  
TYPE \$4

IS

CONNEWY ELECTRIC LABORATORIES

309 Fifth Avenue

NEW YORK CITY

## CITY SALESMEN

WE have a few openings for high-grade salesmen to sell Corona Typewriters and typewriter supplies. No traveling—steady work, remarkable chance for advancement. We can probably place you in your own town. The new Corona Four, just out, is the greatest typewriter value ever offered. A wonderful chance for the right man. Experience unnecessary. Write today.

Corona Typewriter Co., Inc.  
Dent. D. S. Groton, N. Y.



The Midget "Five-in-One" Slide Rule is a combination Mannheim, Polymetric, Log-Log, Binary, Add and Subtract Slide Rule. It will instantly add, subtract, multiply and divide any combination of whole numbers, fractions, mixed numbers and decimals. Gives every root and power, also Logs, Sines and Tangents. Made of aluminum with scales on white celluloid. Size 4 in. Approved and adopted by colleges. Price with Instructions, \$1.50. Leather Case 50c extra. Sent C. O. D. if desired. Catalogue Free. GILSON SLIDE RULE CO., Niles, Mich.

(Patented 1-17-22)

IS

IT'S A WONDER!

The New  
**UNCLE SAM**  
Master Tuning COIL  
The Coil Without Losses




- 1—U. S. Bureau of Standards forms of latticed hard rubber.
- 2—Perfect spacing of each turn because of new type American Ambassador Litz.
- 3—Eliminates adhesives.

4—Increases volume 50 to 180 per cent over old type coils. Also improves selectivity.

5—Laboratory tests prove conclusively that it is the only coil worthy of the name low loss.

6—**WARNING**—Use Ambassador Condensers and Transformers designed and manufactured by Ambassador Engineers for best results with the Ambassador Coil.

**FREE!** Ask your dealer or send self-addressed stamped envelope for wiring diagrams of circuits in which this remarkable coil can be used.



**UNCLE SAM ELECTRIC CO.**  
209 East Sixth St., Plainfield, N. J.

Tried by  
a thousand trails



**C**ARLETON CANOES are built to stand the gaff of years of the hardest service. They do it too. In over a quarter of a century of manufacture we have never had one dissatisfied user.

Carleton Canoes are wonderfully light. They are beautifully balanced, fast and surprisingly easy to handle. And Carleton Canoes are unusually reasonable in price.

Send for our new illustrated catalog. It gives prices and complete information. Write for your free copy today. **THE CARLETON CANOE CO., 72 First Street, Old Town, Maine, U. S. A.**

**CARLETON**  
CANOES

## Four-Tube Set to Fit Your Phonograph Cabinet

(Continued from page 87)

screws. Next, mark each hole deeply with a prick punch and drill the holes of a size to fit the shafts or screws that are to go through them. When the holes are drilled, wash off the paper and try mounting each instrument to make sure that the holes are correct. Take particular care to have the holes for the jacks P1, P2, and Q in exact line horizontally, for the sub-panel T is fastened to them by means of No. 8-32 brass screws.

**T**HE simplest way to fit the sub-panel T is to drill the holes and tap them in the frames of the jacks first, then bolt the jacks to the panel, lay a piece of paper on the bottom of them, and mark where the holes come. You then can use this paper as a template to show where to drill the holes in the sub-panel. The screw holes in the frames of the jacks should be about one inch from the ends that are fastened against panel S.

Next, bolt the sub-panel T on and arrange the amplifier sockets, J2, J3 and J4, the audio transformer I and the by-pass condenser G, as shown in Figs. 4, 7, and 8. No layout can be given for these instruments because of the variation in size and location of mounting screw holes, binding posts, etc.

The sockets should be placed near enough so that the coupling condensers H1 and H2 can be soldered directly to the plate and grid binding posts. The sockets should be placed so that the filament binding posts are farthest from panel S. Now mark off on the sub-panel T the locations of the holes for the screws to hold the instruments in place and for the binding posts Nos. 1 to 7.

In addition, there should be a small hole for the connecting wire near each socket filament binding post; one each under rheostats K2, K3, and K4; one for the wire to switch R1; one under the plus B terminal of transformer I; one midway between the solder lugs of jacks P1 and P2; and two near by-pass condenser G.

The fitting of the detector-tube socket panel U comes next. It is held in place by a No. 8-32 brass screw that clamps it to the two brass angle brackets. These are held against the panel S under rheostat K1, and switch R2 is set so that the ends come together. The socket J1 is fastened to the sub-panel U by brass screws with the grid and plate terminals toward tuning unit A, B, and C.

Now assemble all the instruments as shown in the illustrations. This completes the construction work.

## HOW TO DO THE WIRING

It is well to do all the filament and A and B battery wiring first to cut down the chances of an error that might result in burning out the tubes.

From binding post No. 2 run a wire under the sub-panel to the hole under switch R1, up through the hole to one terminal of the switch R1. Cover this wire with spaghetti below the sub-panel and above it past rheostat K2 (see Figs. 2 and 8). Now connect the terminals of

(Continued on page 163)



## Four-Tube Set to Fit Your Phonograph Cabinet

(Continued from page 162)

the switches *R1*, *R2*, and *R3* as shown in Figs. 2 and 4. From the wire between switches *R1* and *R2* run branches to rheostats *K1* and *K2* and to the minus filament terminal of transformer *I*. Now connect a branch from the wire between switches *R2* and *R3* to rheostat *K3*. Next, connect the remaining terminal of switch *R3* to rheostat *K4*.

The other terminal of rheostat *K1* should be connected with the nearest left-hand terminal of socket *J1* (as seen from the rear in Fig. 4). Now connect the remaining terminals of rheostats *K2*, *K3*, and *K4* with the nearest right-hand terminals (as seen from the rear in Fig. 4) of sockets *J2*, *J3*, and *J4* respectively, covering the portion of the wire that is under the sub-panel *U* with spaghetti tubing.

From binding post No. 4 run a spaghetti-covered wire under the sub-panel to the remaining filament terminal of socket *J2* and run spaghetti-covered branches to the remaining filament terminals of sockets *J1*, *J3*, and *J4*, to the terminal nearest panel *S* on by-pass condenser *G*, and to binding post No. 5. Do not worry about the fact that you will be connecting the minus battery terminal of the *A* battery with the plus terminals of the sockets, and vice versa, because the plus and minus markings on the sockets mean nothing anyway, and on many makes of sockets both terminals are simply marked "FIL."


**N**EXT, run a spaghetti-covered wire under the sub-panel from binding post No. 6 to the plus *B* terminal of transformer *I*. Now run a wire across the bottom solder lugs of jacks *P1* and *P2* and the top lug of jack *Q*, and from this wire run a spaghetti-covered branch through the hole in the sub-panel to binding post No. 7. The terminals of the jack *Q* are reversed in this fashion in order to keep the polarity of the current through the loudspeaker or phones the same in all three jacks. In the closed-circuit jacks *P1* and *P2*, the bottom lug contacts with the tip of the plug, while in the open-circuit style of jack (*Q*) the top lug contacts with it.

Now study Fig. 6 carefully and see how the plate resistances *O1* and *O2* are held in place by means of wire clips soldered to the center lugs of jacks *P1* and *P2*. Bend up the wire clips and solder them in place so that the resistances may be sprung into them as shown in Fig. 6. After this is done, you can solder the coupling condensers *H1* and *H2* between the plate and grid terminals of sockets *J2*, *J3*, and *J4* as shown in Fig. 6. Each pair of .006 fixed condensers is placed so that the solder lugs are together. A capacity of .012 instead of the usual .006 is a slight advantage in passing the lowest musical notes.

Next, connect a short piece of wire between the top lug of jack *P1* and the plate terminal of socket *J2*. Make the same sort of connection between jack *P2* and socket *J3*, and then connect the lower

(Continued on page 164)

## MURDOCK NEUTRODYNE

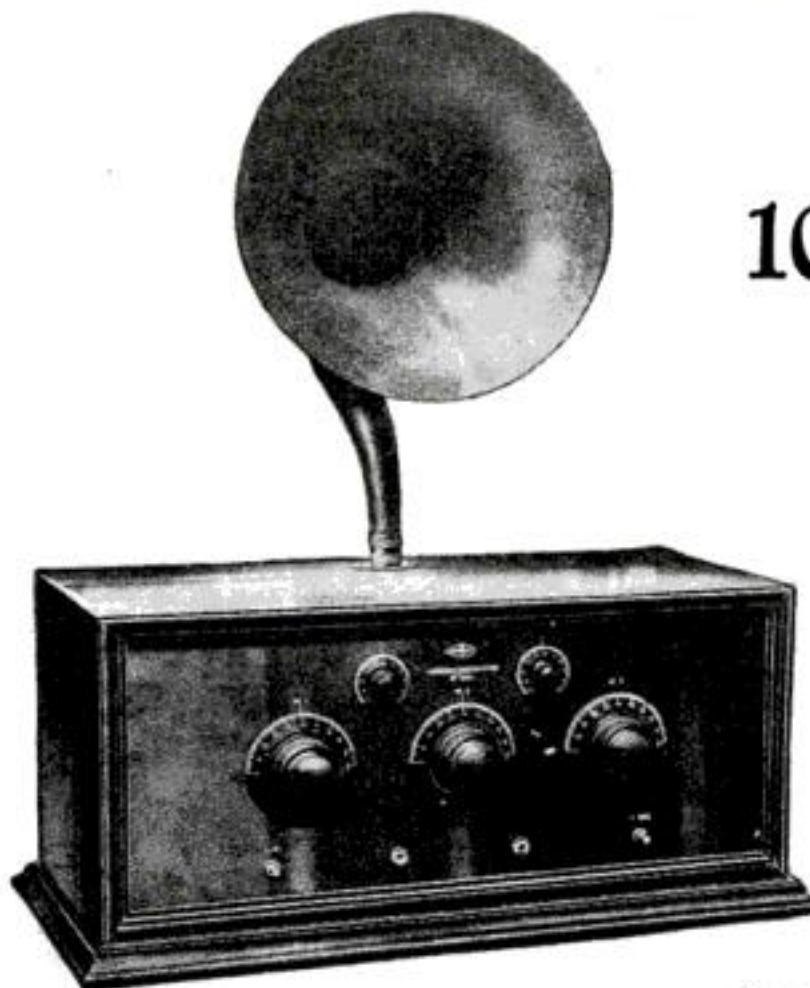

100<sup>00</sup>

# Announcing



### NOTICE

If your dealer doesn't sell Murdock Products write for beautifully illustrated booklets giving complete description of all Murdock Products.

The new Murdock 5-tube Neutrodyne with "built-in" Loud Speaker and "B" battery compartment—backed by 20 years experience in making fine Radio Products.

WM. J. MURDOCK COMPANY, 430 Washington Ave., Chelsea, Mass.  
Sales Offices: New York, Chicago, San Francisco, Washington, D. C.

# MURDOCK RADIO PRODUCTS

Standard since 1904

## \$25.00 in PRIZES

See top of page 10 in front of book for details

## AGENTS WANTED

Men and Women



Housewives all over the country want Stuart's—the original—non-alcoholic food flavors and colors in tubes, tablet articles and kitchen specialties. The only way they can get them is through our agents, who easily make

**\$5 to \$8 a Day**

G. W. RACK, Mich., says he sold \$52 worth in two days; Mrs. HUNT, Iowa, got \$10 worth of orders over the phone in four hours. You can do it with our plan. No experience needed. Write at once for details.

G. H. STUART & CO.

668 Lake St. Newark, New York



## Protect Your Tools with - NYOIL


Your valuable tools can be protected absolutely from rust. Cover all your tools that you aren't using regularly with a thin coat of NYOIL. Keep a can in your tool chest. The patented cap prevents it from leaking. Remember—Summer is the worst season for rust.

NYOIL is a highly refined oil that does not color or stain or gum. Makes an excellent polish for pianos, automobile and other highly finished surfaces.

Buy Nyoil of your dealer or write us.  
W. F. NYE, New Bedford, Mass.





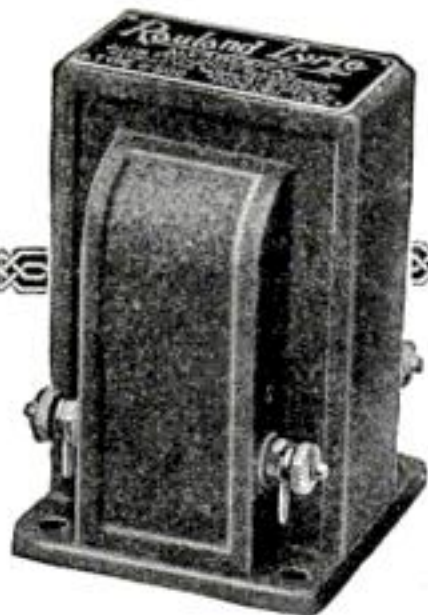

## What is Ideal Tone Reproduction?

MANY factors influence radio tone quality between the antenna and the horn—valve-action in the vacuum tube, the design of audio transformers, electromagnetic action in the loudspeaker unit. Absolute perfection in any one factor is of no avail unless the other factors are equally perfect.

Famous experts in audio transformer design, when released entirely from cost limitations, are thus able to produce an instrument which, by compensating for imperfections in loudspeaker efficiency, produces results far superior musically to the "theoretically perfect" amplification of resistance coupling. At the same time, we retain the high amplification possible only with transformer coupling.

Detailed description of this Laboratory-Grade instrument, with amplification curve, on request. Rauland Mfg. Co., 2668 Coyne St., Chicago.

Price \$9.00  
Ask Your Dealer

**Rauland-Lyric**  
ALL-AMERICAN  
TRANSFORMER  
The Choice of the Noted Music Critics

## A Four-Tube Set to Fit Your Phonograph Cabinet

(Continued from page 163)

lug of jack Q with the plate terminal of socket J4.

Look at Fig. 6 again and see how the grid leaks M and N are supported by the holes in condensers H1 and H2 and wire clips branching out from the switch side of the rheostat connections. Bend these two wire clips into shape and solder them in place as shown. After this you can connect the grid terminal of transformer I with the grid terminal of socket J2, as shown in Figs. 2 and 8.

The tuning circuits have been left until the last to allow more room for work on the lower part of the panel.

Wire the secondary circuit first. Run a wire from the rotary-plate terminal of condenser D to the plus filament terminal of socket J1 and continue it across to the bottom connection of the secondary coil B. Next, run a wire from the stator-plate terminal of condenser D to the top terminal of coil B. Solder one terminal of grid condenser E to this wire and connect the other terminal of condenser E with the grid terminal of socket J1 with a piece of wire about  $\frac{1}{4}$  inch long (see Figs. 2 and 4). This completes the secondary circuit.

THE plate circuit is finished by connecting one terminal of coil C with the plate terminal of socket J1, and the other with the P terminal of transformer I. Between this latter wire and the wire from the rotary-plate terminal of condenser D, solder by-pass condenser F (see Figs. 2, 4, and 8).

The antenna circuit wires are shown clearly in Figs. 4 and 7. The top end of the primary coil A is connected directly with binding post No. 1, and the bottom end of the coil is connected with the terminal nearest panel S of condenser G. Now, connect the remaining terminal of condenser G with binding post No. 2, with spaghetti covering on the part of the wire under the panel. This completes the wiring of the receiver.

### HOW TO INSTALL THE RECEIVER

The first step is to remove the wooden partitions in the record compartment of the phonograph cabinet. Then set a wooden strip  $\frac{3}{8}$  inch thick around the inside of the cabinet about 3 inches inside the door. Fasten this strip with wood screws. A door should be cut in the back of the cabinet, as in Fig. 1, so that the dry-cell B batteries can be placed in it behind the set, and so that tubes can be changed and antenna connections made.

The easiest way to cut the door is to mark it off with a pencil, drill a hole at a corner, and saw down one side with a keyhole saw. Now fit the hinges across the slot and screw them firmly into place. Next, saw down the opposite side and fit the latch or bolt. It is then a simple matter to saw across the top and bottom and you will be sure that the hinges and latch will fit perfectly.

Below the bottom edge of the door drill holes for the antenna and ground con-

nections and the wires to the A battery.

The receiver now can be placed with the panel against the wooden strip and holes drilled near the edges for wood screws to hold it in place.

The storage battery can be kept in the nearest closet, and if care is observed in the wiring of the antenna and ground connections and the wires to the A battery, no one will notice that there is a radio receiver in the room when the phonograph door is shut.

### TO OPERATE THE RECEIVER

After the installation is completed, the necessary connections with the antenna and ground and A and B batteries are made, the rheostats K1, K2, K3, and K4 should be turned off, the tubes inserted in the sockets and the switches R1, R2, and R3 pulled out. Then the rheostats shown in Fig. 3 should be turned on slowly, one by one, until the tubes glow dimly. Next, insert the loudspeaker plug in jack Q and turn the dial of condenser D slowly until a signal is heard. As soon as you hear a local station, turn all the rheostats up slowly until the point of maximum volume is reached. Then place the plug in jack P1 or P2 and turn the tickler coil dial C until the point of maximum volume with perfect clearness is reached. After a little practice you will find the way to turn the tickler dial so as to get maximum regeneration without oscillation or whistling sounds.

Switch R1 cuts off all the tubes, while switch R2 cuts off the last two tubes, and switch R3 cuts out only the last tube. You will note that the arrangement of the switches is such that they control the tubes that are connected with the jacks immediately under them. Thus it is easy to form the habit of pulling out the switch when plug is inserted in the jack.

### Recent Publications

*The New Theories of Matter and the Atom*, by Alfred Berthoud, professor of physical chemistry at the University of Neuchâtel. A comprehensive history of this fascinating phase of science, presented in understandable language. The Macmillan Company.

*Food Products*, by Henry C. Sherman, Ph.D., Sc.D., professor of food chemistry, Columbia University. New edition. The Macmillan Company.

*Elements of Electrical Engineering*, by George D. Shepardson, A.M., M.E., Sc.D., professor of electrical engineering, University of Minnesota. The Macmillan Company.

*Handbook of Direct Currents*, by K. C. Graham. One of the "Railwaymen's Handbook Series." Simmons-Boardman Publishing Company.

*Meal Planning and Table Service*, by N. Beth Bailey, associate professor, Household Science Department, Iowa State College. A guide for housewives who have no maids. Illustrated. The Manual Arts Press.





**RADIO Everybody**

**Big Radio Book**

**Send For it At Once**

**RANDOLPH RADIO CORP.**

**Satisfaction Guaranteed**

# Send For This Sensational Radio Bargain Book-FREE

**Order Direct From This Page! Save About One-half!** Compare our prices with others. Only highest grade nationally known GUARANTEED parts. OUR GUARANTEE PROTECTS YOU. Money cheerfully refunded if you are not satisfied. Be sure to write your order and state prices plainly. Send post office or express money order or bank draft for total amount to insure prompt shipment. ALL PRICES ON THIS PAGE INCLUDE SHIPPING CHARGES RIGHT TO YOUR DOOR. Refer to any bank or commercial agency regarding our reliability. If your favorite circuit is shown here, order direct from this ad. No skill required to build your own radio with Randolph parts. Panels are all drilled. Instructions are simple and complete. Everything comes ready to assemble. Order direct! All ship'g charges prepaid.



## COMPLETE PARTS FOR 3 AND 5-TUBE NEUTRODYNE RECEIVING SET

Genuine Hazeltine Licensed Neutrodyne Parts Furnished.

**PARTS FOR 5-TUBE SET**

- 1 7x24x1/4 Drilled Panel
- 2 Thordarson or Columbia Audio Transformers
- 3 4" Bakelite Dials
- 7 Marked Binding Posts
- 2 Precision Jacks
- 1 Grid Leak and Condenser
- 1 Bakelite Rheostat, 30-ohm
- 5 Bakelite Sockets
- 1 Bakelite Rheostat, 6-ohm
- 1 .001 Condenser
- 1 Bakelite Binding Post Strip
- 1 .006 Mica Condenser

Complete blue-prints and working diagrams.


**35 feet Hook-up Wire**  
1 Kit consisting of 3 Hazeltine Licensed Neutroformers & 2 Neutrodons  
1 Baseboard  
2 Bezels

**\$33.75**

## COMPLETE PARTS FOR BREMER TULLY 5-Tube Nameless Circuit

With Genuine Bremer-Tully Parts, including Drilled Bakelite Panel and Instructions.

Specially priced at **\$39.25**

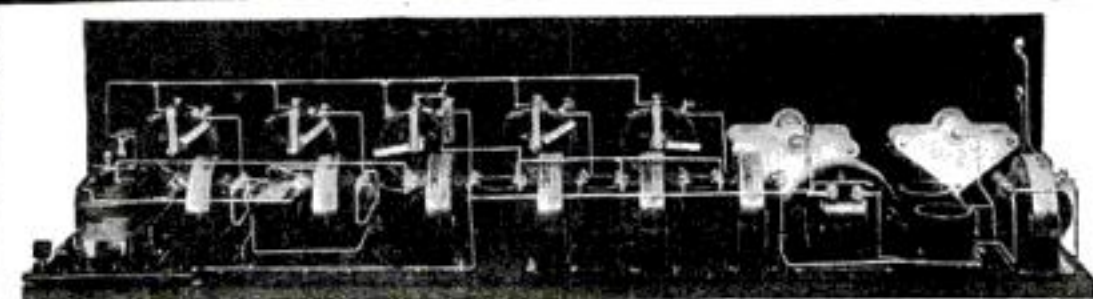

## COMPLETE PARTS FOR 8-TUBE SUPER-HETERODYNE

- 2 23-Plate Bremer-Tully or Duplex Low Loss Condensers.
- 3 Remler or Columbia Intermediate Frequency Transformers.
- 1 Remler or Columbia Tuned Circuit Transformer
- 1 Special Oscillator Coupler
- 1 Midget Condenser
- 2 Bakelite Sockets
- 2 Thordarson or Columbia A.F. Transformers
- 1 Connecticut Filament Switch

- 2 Bakelite 6-ohm Rheostats
- 2 Bakelite 30-ohm
- 1 Bakelite Potentiometer, 400 ohms
- 1 Carter Double Circuit Jack
- 1 Dubiller 1 mfd. Condenser
- 1 .006 Mica Condenser
- 1 .0005 Mica Condenser and 2 megohm Grid Leak
- 3 .0025 Mica Condensers
- 10 Binding Posts
- 1 .00025 Mica Condenser
- 1 Bakelite Terminal Strip for Binding Posts

- 1 Multicord cable for connecting batteries
- 1 7x30x1/4 Drilled Bakelite Panel
- 1 Baseboard
- 35 ft. Hook-up Wire
- 2-4 in. Bakelite Dials
- 2 4 1/2 volt C Batteries

**\$59.75**

Complete wiring diagrams, base board layout, blue-prints and instructions.

## COMPLETE PARTS FOR Two Stage Amplifier

with Thordarson or Columbia Transformers; with drilled panel & wiring diagram

**\$10.90**

## COMPLETE PARTS FOR Reinartz


1-Tube Reinartz Set... **\$10.45**  
3-Tube Reinartz Set... **17.55**

## COMPLETE PARTS FOR Ultra Audion

1000 Mile 1-Tube Set... **\$8.95**  
with drilled panel and wiring diagram.

## Randolph Special Headphones

2200 Ohm ..... **\$2.45**  
3000 Ohm ..... **2.95**

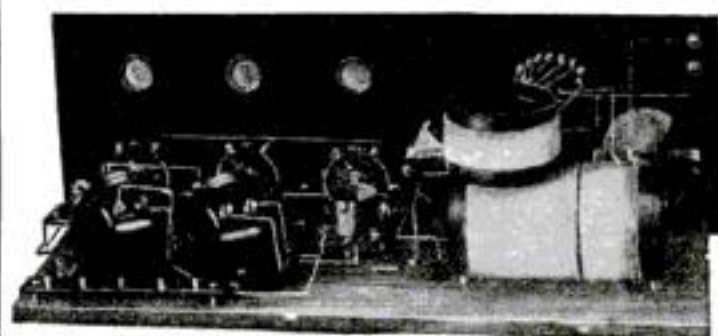

## COMPLETE PARTS FOR 3-TUBE Cockaday Receiving Set

- 1 Cockaday Coil
- 2 23-Plate Hy-Grade Cond.
- 1 Bakelite Rheostat, 6 ohm.
- 2 Bakelite Rheostat, 30 ohm.
- 3 Bakelite Sockets
- 1 high ratio Columbia or Thordarson Transformer
- 1 Single Circuit Jack
- 1 low ratio Columbia or Thordarson Transformer
- 2 Double Circuit Jacks
- 2 3 in. Bakelite Dials.

- 1 Grid Leak and Mica Cond.
- 7 Switch Points. 2 stops.
- 1 Bakelite Binding Post Strip
- 7 Binding Posts
- 1 7x21x1/4 in. Drilled Bakelite Panel
- 3 Bezels
- 1 Baseboard
- 1 switch lever
- 24 ft. Hook-up Wire

**\$19.95**

Complete blue-prints and wiring diagrams.

1-Tube Set... **\$10.45**

## Easy to Build Your Own Radio Set

All complete parts for sets on this page consist of standard advertised guaranteed parts and include drilled bakelite panels and wiring diagrams for easy set construction. Everything guaranteed on money-back basis. All transportation charges paid. Don't forget! Only genuine guaranteed parts used. Lack of space does not permit us to itemize individual parts, but you are fully protected by our money-back guarantee. Our Service Division is behind you.

## FREE BIG MONEY SAVING RADIO CATALOG

containing a thousand bargains of everything on radio—parts, supplies, complete parts for sets, complete sets, etc., also a mine of very latest information on all different circuits, complete list of broadcasting stations, and other valuable, up-to-the-minute radio data. Send your name and address on a card or letter. We will send catalog free.

## Free Service Department

Our radio engineers will help you solve all your radio problems, and furnish up-to-date information on set construction, operation and improvement. This service is free to our customers.

## COMPLETE PARTS FOR

## 5-Tube Improved Cockaday Receiving Set

With Resistance Coupled Amplification

As designed by L. M. Cockaday. Including drilled panel and wiring diagram complete, ready to wire.

**\$39.65**

**RANDOLPH RADIO CORPORATION**  
159 N. Union Ave. Dept. 339 Chicago, Illinois



# Build Your Own Radio Set With Barawik Standard Radio Goods

**\$5.25**

## 10" LOUD SPEAKER

**L613 Special Sale Price \$5.95**

This speaker is a marvel for volume and quality of tone. It is actually superior to most of the higher priced speakers and at our price is the biggest value on the market. Guaranteed to please you. Beautiful mottled black finished horn. Bell diameter 10 inches. Height 21 inches. Complete with cord.

**BARAWIK QUALITY HEADSET**

**L770 Spc.** Price per set \$2.38

These headsets are the very best for tone quality and volume. First quality. Designed to sell for much higher prices than we ask, and at our price are a wonderful bargain. Receiver comes as one polished black finish. Comfortable. Folded over head band. Complete with 2 foot cord.

**OUR SPECIAL VARIOCOUPLER**

**L433 Each \$5.95**

The most efficient type of coupler. Primary and secondary wound on bakelite type. Primary tapped for fine tuning. Range 150 to 650 meters.

**MOULDED VARIOMETER**

**L432 Each \$3.35**

Polished black moulded rotor and motor frame. Main-stem inductance with greatest efficiency and minimum distributed capacity. A high grade instrument that will get the best results. Wave length 150 to 600 meters.

**EXCEL 100 VARIOCOUPLER**

**L433 Each \$5.95**

A wonderful value. Produces excellent results. Secondary wound on bakelite. Right mounting support. Primary tapped for fine tuning. Range 150-600 meters.

**L432 Variometer—same style. Each \$5.95**

## Our Prices Are Prepaid

**SUPERIOR BAKELITE VARIOMETER**

**L433 Each \$5.95**

Formed of red bakelite. A best hand-made instrument. Green silk windings calculated for highest efficiency. 1/2 inch shaft. Nickel-plated connections. Produces superior results in any type circuit 150 to 650 meters.

**L432 Variometer. Same style. Primary tapped for fine tuning. Each \$5.95**

**SUPERIOR VARIOCOUPLER**

**L433 Each \$5.95**

Stator tube and rotor ball of moulded red brown bakelite. Large size green silk windings insure highest efficiency. 1/2 inch shaft. Superior results in any type circuit 150 to 650 meters. Tapped primary for fine tuning. Noiseless contacts.

**L432 Special type for studio circuit. High sensitive black up. Each \$5.95**

**SPLIT STATOR VARIOMETER**

**L434 Each \$5.95**

A wonderful value at our price. Polished black bakelite rotor and motor frame. Large size green silk windings insure highest efficiency. 1/2 inch shaft. Noiseless split stator winding.

**FRANZISCHL SPIDER WEB VARIOMETER AND VARIOCOUPLER**

**L486 Variometer. Ea. \$5.95**

**L487 Variometer. Ea. \$5.95**

Very fine. High efficiency and responsiveness to distant signals are features of these instruments due to absence of any insulating material in the magnetics. Low energy. Secondary adjustment provides sharp tuning. Panel or table mounting. Complete with dial.

**COTO COMPACT VARIOMETER AND VARIOCOUPLER**

**L488 Variometer. Ea. \$4.95**

**L489 Variometer. Ea. \$4.95**

Small in size. Highly efficient. Unusual for Variometer measures 2 1/2 x 3 1/2 x 1 1/2 inches. Variocoupler measures 2 1/2 x 3 1/2 x 1 1/2 inches. Moulded bakelite frame. Silk covered windings. Table or panel mounting. 1/2 inch shaft. Range 200 to 600 meters.

**SWITCH LEVERS**

Very neat polished composition knob. Exposed metal parts polished nickel finish. Paired with panel bushing and two set screws. A high grade switch. 1 1/2 inch radius. **L381 With black knob. Ea. 14c**  
**L382 With mahogany knob. Each. 18c**

**INDUCTANCE SWITCH**

**L383 Price including knob and dial \$1.95**

Magnetic switch points and contact lever behind panel. Only one hole needed to mount. 12 switch points, any number of which may be used.

**SPIDER WEB COILS**

**L390—5 turns 42c**  
**L391—10 turns 42c**  
**L392—15 turns 42c**  
**L393—20 turns 42c**  
**L394—25 turns 42c**  
**L395—30 turns 42c**  
**L396—35 turns 42c**  
**L397—40 turns 42c**  
**L398—45 turns 42c**  
**L399—50 turns 42c**  
**L400—55 turns 42c**  
**L401—60 turns 42c**  
**L402—65 turns 42c**  
**L403—70 turns 42c**  
**L404—75 turns 42c**  
**L405—80 turns 42c**  
**L406—85 turns 42c**  
**L407—90 turns 42c**  
**L408—95 turns 42c**  
**L409—100 turns 42c**  
**L410—105 turns 42c**  
**L411—110 turns 42c**  
**L412—115 turns 42c**  
**L413—120 turns 42c**  
**L414—125 turns 42c**  
**L415—130 turns 42c**  
**L416—135 turns 42c**  
**L417—140 turns 42c**  
**L418—145 turns 42c**  
**L419—150 turns 42c**  
**L420—155 turns 42c**  
**L421—160 turns 42c**  
**L422—165 turns 42c**  
**L423—170 turns 42c**  
**L424—175 turns 42c**  
**L425—180 turns 42c**  
**L426—185 turns 42c**  
**L427—190 turns 42c**  
**L428—195 turns 42c**  
**L429—200 turns 42c**  
**L430—205 turns 42c**  
**L431—210 turns 42c**  
**L432—215 turns 42c**  
**L433—220 turns 42c**  
**L434—225 turns 42c**  
**L435—230 turns 42c**  
**L436—235 turns 42c**  
**L437—240 turns 42c**  
**L438—245 turns 42c**  
**L439—250 turns 42c**  
**L440—255 turns 42c**  
**L441—260 turns 42c**  
**L442—265 turns 42c**  
**L443—270 turns 42c**  
**L444—275 turns 42c**  
**L445—280 turns 42c**  
**L446—285 turns 42c**  
**L447—290 turns 42c**  
**L448—295 turns 42c**  
**L449—300 turns 42c**  
**L450—305 turns 42c**  
**L451—310 turns 42c**  
**L452—315 turns 42c**  
**L453—320 turns 42c**  
**L454—325 turns 42c**  
**L455—330 turns 42c**  
**L456—335 turns 42c**  
**L457—340 turns 42c**  
**L458—345 turns 42c**  
**L459—350 turns 42c**  
**L460—355 turns 42c**  
**L461—360 turns 42c**  
**L462—365 turns 42c**  
**L463—370 turns 42c**  
**L464—375 turns 42c**  
**L465—380 turns 42c**  
**L466—385 turns 42c**  
**L467—390 turns 42c**  
**L468—395 turns 42c**  
**L469—400 turns 42c**  
**L470—405 turns 42c**  
**L471—410 turns 42c**  
**L472—415 turns 42c**  
**L473—420 turns 42c**  
**L474—425 turns 42c**  
**L475—430 turns 42c**  
**L476—435 turns 42c**  
**L477—440 turns 42c**  
**L478—445 turns 42c**  
**L479—450 turns 42c**  
**L480—455 turns 42c**  
**L481—460 turns 42c**  
**L482—465 turns 42c**  
**L483—470 turns 42c**  
**L484—475 turns 42c**  
**L485—480 turns 42c**  
**L486—485 turns 42c**  
**L487—490 turns 42c**  
**L488—495 turns 42c**  
**L489—500 turns 42c**  
**L490—505 turns 42c**  
**L491—510 turns 42c**  
**L492—515 turns 42c**  
**L493—520 turns 42c**  
**L494—525 turns 42c**  
**L495—530 turns 42c**  
**L496—535 turns 42c**  
**L497—540 turns 42c**  
**L498—545 turns 42c**  
**L499—550 turns 42c**  
**L500—555 turns 42c**  
**L501—560 turns 42c**  
**L502—565 turns 42c**  
**L503—570 turns 42c**  
**L504—575 turns 42c**  
**L505—580 turns 42c**  
**L506—585 turns 42c**  
**L507—590 turns 42c**  
**L508—595 turns 42c**  
**L509—600 turns 42c**  
**L510—605 turns 42c**  
**L511—610 turns 42c**  
**L512—615 turns 42c**  
**L513—620 turns 42c**  
**L514—625 turns 42c**  
**L515—630 turns 42c**  
**L516—635 turns 42c**  
**L517—640 turns 42c**  
**L518—645 turns 42c**  
**L519—650 turns 42c**  
**L520—655 turns 42c**  
**L521—660 turns 42c**  
**L522—665 turns 42c**  
**L523—670 turns 42c**  
**L524—675 turns 42c**  
**L525—680 turns 42c**  
**L526—685 turns 42c**  
**L527—690 turns 42c**  
**L528—695 turns 42c**  
**L529—700 turns 42c**  
**L530—705 turns 42c**  
**L531—710 turns 42c**  
**L532—715 turns 42c**  
**L533—720 turns 42c**  
**L534—725 turns 42c**  
**L535—730 turns 42c**  
**L536—735 turns 42c**  
**L537—740 turns 42c**  
**L538—745 turns 42c**  
**L539—750 turns 42c**  
**L540—755 turns 42c**  
**L541—760 turns 42c**  
**L542—765 turns 42c**  
**L543—770 turns 42c**  
**L544—775 turns 42c**  
**L545—780 turns 42c**  
**L546—785 turns 42c**  
**L547—790 turns 42c**  
**L548—795 turns 42c**  
**L549—800 turns 42c**  
**L550—805 turns 42c**  
**L551—810 turns 42c**  
**L552—815 turns 42c**  
**L553—820 turns 42c**  
**L554—825 turns 42c**  
**L555—830 turns 42c**  
**L556—835 turns 42c**  
**L557—840 turns 42c**  
**L558—845 turns 42c**  
**L559—850 turns 42c**  
**L560—855 turns 42c**  
**L561—860 turns 42c**  
**L562—865 turns 42c**  
**L563—870 turns 42c**  
**L564—875 turns 42c**  
**L565—880 turns 42c**  
**L566—885 turns 42c**  
**L567—890 turns 42c**  
**L568—895 turns 42c**  
**L569—900 turns 42c**  
**L570—905 turns 42c**  
**L571—910 turns 42c**  
**L572—915 turns 42c**  
**L573—920 turns 42c**  
**L574—925 turns 42c**  
**L575—930 turns 42c**  
**L576—935 turns 42c**  
**L577—940 turns 42c**  
**L578—945 turns 42c**  
**L579—950 turns 42c**  
**L580—955 turns 42c**  
**L581—960 turns 42c**  
**L582—965 turns 42c**  
**L583—970 turns 42c**  
**L584—975 turns 42c**  
**L585—980 turns 42c**  
**L586—985 turns 42c**  
**L587—990 turns 42c**  
**L588—995 turns 42c**  
**L589—1000 turns 42c**  
**L590—1005 turns 42c**  
**L591—1010 turns 42c**  
**L592—1015 turns 42c**  
**L593—1020 turns 42c**  
**L594—1025 turns 42c**  
**L595—1030 turns 42c**  
**L596—1035 turns 42c**  
**L597—1040 turns 42c**  
**L598—1045 turns 42c**  
**L599—1050 turns 42c**  
**L600—1055 turns 42c**  
**L601—1060 turns 42c**  
**L602—1065 turns 42c**  
**L603—1070 turns 42c**  
**L604—1075 turns 42c**  
**L605—1080 turns 42c**  
**L606—1085 turns 42c**  
**L607—1090 turns 42c**  
**L608—1095 turns 42c**  
**L609—1100 turns 42c**  
**L610—1105 turns 42c**  
**L611—1110 turns 42c**  
**L612—1115 turns 42c**  
**L613—1120 turns 42c**  
**L614—1125 turns 42c**  
**L615—1130 turns 42c**  
**L616—1135 turns 42c**  
**L617—1140 turns 42c**  
**L618—1145 turns 42c**  
**L619—1150 turns 42c**  
**L620—1155 turns 42c**  
**L621—1160 turns 42c**  
**L622—1165 turns 42c**  
**L623—1170 turns 42c**  
**L624—1175 turns 42c**  
**L625—1180 turns 42c**  
**L626—1185 turns 42c**  
**L627—1190 turns 42c**  
**L628—1195 turns 42c**  
**L629—1200 turns 42c**  
**L630—1205 turns 42c**  
**L631—1210 turns 42c**  
**L632—1215 turns 42c**  
**L633—1220 turns 42c**  
**L634—1225 turns 42c**  
**L635—1230 turns 42c**  
**L636—1235 turns 42c**  
**L637—1240 turns 42c**  
**L638—1245 turns 42c**  
**L639—1250 turns 42c**  
**L640—1255 turns 42c**  
**L641—1260 turns 42c**  
**L642—1265 turns 42c**  
**L643—1270 turns 42c**  
**L644—1275 turns 42c**  
**L645—1280 turns 42c**  
**L646—1285 turns 42c**  
**L647—1290 turns 42c**  
**L648—1295 turns 42c**  
**L649—1300 turns 42c**  
**L650—1305 turns 42c**  
**L651—1310 turns 42c**  
**L652—1315 turns 42c**  
**L653—1320 turns 42c**  
**L654—1325 turns 42c**  
**L655—1330 turns 42c**  
**L656—1335 turns 42c**  
**L657—1340 turns 42c**  
**L658—1345 turns 42c**  
**L659—1350 turns 42c**  
**L660—1355 turns 42c**  
**L661—1360 turns 42c**  
**L662—1365 turns 42c**  
**L663—1370 turns 42c**  
**L664—1375 turns 42c**  
**L665—1380 turns 42c**  
**L666—1385 turns 42c**  
**L667—1390 turns 42c**  
**L668—1395 turns 42c**  
**L669—1400 turns 42c**  
**L670—1405 turns 42c**  
**L671—1410 turns 42c**  
**L672—1415 turns 42c**  
**L673—1420 turns 42c**  
**L674—1425 turns 42c**  
**L675—1430 turns 42c**  
**L676—1435 turns 42c**  
**L677—1440 turns 42c**  
**L678—1445 turns 42c**  
**L679—1450 turns 42c**  
**L680—1455 turns 42c**  
**L681—1460 turns 42c**  
**L682—1465 turns 42c**  
**L683—1470 turns 42c**  
**L684—1475 turns 42c**  
**L685—1480 turns 42c**  
**L686—1485 turns 42c**  
**L687—1490 turns 42c**  
**L688—1495 turns 42c**  
**L689—1500 turns 42c**  
**L690—1505 turns 42c**  
**L691—1510 turns 42c**  
**L692—1515 turns 42c**  
**L693—1520 turns 42c**  
**L694—1525 turns 42c**  
**L695—1530 turns 42c**  
**L696—1535 turns 42c**  
**L697—1540 turns 42c**  
**L698—1545 turns 42c**  
**L699—1550 turns 42c**  
**L700—1555 turns 42c**  
**L701—1560 turns 42c**  
**L702—1565 turns 42c**  
**L703—1570 turns 42c**  
**L704—1575 turns 42c**  
**L705—1580 turns 42c**  
**L706—1585 turns 42c**  
**L707—1590 turns 42c**  
**L708—1595 turns 42c**  
**L709—1600 turns 42c**  
**L710—1605 turns 42c**  
**L711—1610 turns 42c**  
**L712—1615 turns 42c**  
**L713—1620 turns 42c**  
**L714—1625 turns 42c**  
**L715—1630 turns 42c**  
**L716—1635 turns 42c**  
**L717—1640 turns 42c**  
**L718—1645 turns 42c**  
**L719—1650 turns 42c**  
**L720—1655 turns 42c**  
**L721—1660 turns 42c**  
**L722—1665 turns 42c**  
**L723—1670 turns 42c**  
**L724—1675 turns 42c**  
**L725—1680 turns 42c**  
**L726—1685 turns 42c**  
**L727—1690 turns 42c**  
**L728—1695 turns 42c**  
**L729—1700 turns 42c**  
**L730—1705 turns 42c**  
**L731—1710 turns 42c**  
**L732—1715 turns 42c**  
**L733—1720 turns 42c**  
**L734—1725 turns 42c**  
**L735—1730 turns 42c**  
**L736—1735 turns 42c**  
**L737—1740 turns 42c**  
**L738—1745 turns 42c**  
**L739—1750 turns 42c**  
**L740—1755 turns 42c**  
**L741—1760 turns 42c**  
**L742—1765 turns 42c**  
**L743—1770 turns 42c**  
**L744—1775 turns 42c**  
**L745—1780 turns 42c**  
**L746—1785 turns 42c**  
**L747—1790 turns 42c**  
**L748—1795 turns 42c**  
**L749—1800 turns 42c**  
**L750—1805 turns 42c**  
**L751—1810 turns 42c**  
**L752—1815 turns 42c**  
**L753—1820 turns 42c**  
**L754—1825 turns 42c**  
**L755—1830 turns 42c**  
**L756—1835 turns 42c**  
**L757—1840 turns 42c**  
**L758—1845 turns 42c**  
**L759—1850 turns 42c**  
**L760—1855 turns 42c**  
**L761—1860 turns 42c**  
**L762—1865 turns 42c**  
**L763—1870 turns 42c**  
**L764—1875 turns 42c**  
**L765—1880 turns 42c**  
**L766—1885 turns 42c**  
**L767—1890 turns 42c**  
**L768—1895 turns 42c**  
**L769—1900 turns 42c**  
**L770—1905 turns 42c**  
**L771—1910 turns 42c**  
**L772—1915 turns 42c**  
**L773—1920 turns 42c**  
**L774—1925 turns 42c**  
**L775—1930 turns 42c**  
**L776—1935 turns 42c**  
**L777—1940 turns 42c**  
**L778—1945 turns 42c**  
**L779—1950 turns 42c**  
**L780—1955 turns 42c**  
**L781—1960 turns 42c**  
**L782—1965 turns 42c**  
**L783—1970 turns 42c**  
**L784—1975 turns 42c**  
**L785—1980 turns 42c**  
**L786—1985 turns 42c**  
**L787—1990 turns 42c**  
**L788—1995 turns 42c**  
**L789—2000 turns 42c**  
**L790—2005 turns 42c**  
**L791—2010 turns 42c**  
**L792—2015 turns 42c**  
**L793—2020 turns 42c**  
**L794—2025 turns 42c**  
**L795—2030 turns 42c**  
**L796—2035 turns 42c**  
**L797—2040 turns 42c**  
**L798—2045 turns 42c**  
**L799—2050 turns 42c**  
**L800—2055 turns 42c**  
**L801—2060 turns 42c**  
**L802—2065 turns 42c**  
**L803—2070 turns 42c**  
**L804—2075 turns 42c**  
**L805—2080 turns 42c**  
**L806—2085 turns 42c**  
**L807—2090 turns 42c**  
**L808—2095 turns 42c**  
**L809—2100 turns 42c**  
**L810—2105 turns 42c**  
**L811—2110 turns 42c**  
**L812—2115 turns 42c**  
**L813—2120 turns 42c**  
**L814—2125 turns 42c**  
**L815—2130 turns 42c**  
**L816—2135 turns 42c**  
**L817—2140 turns 42c**  
**L818—2145 turns 42c**  
**L819—2150 turns 42c**  
**L820—2155 turns 42c**  
**L821—2160 turns 42c**  
**L822—2165 turns 42c**  
**L823—2170 turns 42c**  
**L824—2175 turns 42c**  
**L825—2180 turns 42c**  
**L826—2185 turns 42c**  
**L827—2190 turns 42c**  
**L828—2195 turns 42c**  
**L829—2200 turns 42c**  
**L830—2205 turns 42c**  
**L831—2210 turns 42c**  
**L832—2215 turns 42c**  
**L833—2220 turns 42c**  
**L834—2225 turns 42c**  
**L835—2230 turns 42c**  
**L836—2235 turns 42c**  
**L837—2240 turns 42c**  
**L838—2245 turns 42c**  
**L839—2250 turns 42c**  
**L840—2255 turns 42c**  
**L841—2260 turns 42c**  
**L842—2265 turns 42c**  
**L843—2270 turns 42c**  
**L844—2275 turns 42c**  
**L845—2280 turns 42c**  
**L846—2285 turns 42c**  
**L847—2290 turns 42c**  
**L848—2295 turns 42c**  
**L849—2300 turns 42c**  
**L850—2305 turns 42c**  
**L851—2310 turns 42c**  
**L852—2315 turns 42c**  
**L853—2320 turns 42c**  
**L854—2325 turns 42c**  
**L855—2330 turns 42c**  
**L856—2335 turns 42c**  
**L857—2340 turns 42c**  
**L858—2345 turns 42c**  
**L859—2350 turns 42c**  
**L860—2355 turns 42c**  
**L861—2360 turns 42c**  
**L862—2365 turns 42c**  
**L863—2370 turns 42c**  
**L864—2375 turns 42c**  
**L865—2380 turns 42c**  
**L866—2385 turns 42c**  
**L867—2390 turns 42c**  
**L868—2395 turns 42c**  
**L869—2400 turns 42c**  
**L870—2405 turns 42c**  
**L871—2410 turns 42c**  
**L872—2415 turns 42c**  
**L873—2420 turns 42c**  
**L874—2425 turns 42c**  
**L875—2430 turns 42c**  
**L876—2435 turns 42c**  
**L877—2440 turns 42c**  
**L878—2445 turns 42c**  
**L879—2450 turns 42c**  
**L880—2455 turns 42c**  
**L881—2460 turns 42c**  
**L882—2465 turns 42c**  
**L883—2470 turns 42c**  
**L884—2475 turns 42c**  
**L885—2480 turns 42c**  
**L886—2485 turns 42c**  
**L887—2490 turns 42c**  
**L888—2495 turns 42c**  
**L889—2500 turns 42c**  
**L890—2505 turns 42c**  
**L891—2510 turns 42c**  
**L892—2515 turns 42c**  
**L893—2520 turns 42c**  
**L894—2525 turns 42c**  
**L895—2530 turns 42c**  
**L896—2535 turns 42c**  
**L897—2540 turns 42c**  
**L898—2545 turns 42c**  
**L899—2550 turns 42c**  
**L900—2555 turns 42c**  
**L901—2560 turns 42c**  
**L902—2565 turns 42c**  
**L903—2570 turns 42c**  
**L904—2575 turns 42c**  
**L905—2580 turns 42c**  
**L906—2585 turns 42c**  
**L907—2590 turns 42c**  
**L908—2595 turns 42c**  
**L909—2600 turns 42c**  
**L910—2605 turns 42c**  
**L911—2610 turns 42c**  
**L912—2615 turns 42c**  
**L913—2620 turns 42c**  
**L914—2625 turns 42c**  
**L915—2630 turns 42c**  
**L916—2635 turns 42c**  
**L917—2640 turns 42c**  
**L918—2645 turns 42c**  
**L919—2650 turns 42c**  
**L920—2655 turns 42c**  
**L921—2660 turns 42c**  
**L922—2665 turns 42c**  
**L923—2670 turns 42c**  
**L924—2675 turns 42c**  
**L925—**



This One



E7KG-8NQ-0PSC



# Prices Now Lower Than Ever Before—60,000 Sets Prove Our Reliability

## Complete Sets of Parts for Popular Circuits

Below you will find complete sets of parts listed for most of the popular circuits. We recommend that parts be bought in complete sets for the following reasons:

Only high grade parts are used in these sets and each part is guaranteed to be perfect. Each one of these circuits has been tried and successfully operated under many different conditions. The detailed instructions and diagrams supplied with each set make it easy for anyone without previous experience to build an outfit that will give most satisfactory results. Parts supplied are for UV201A or C301A tubes throughout. If dry cell tubes are to be used, specify type of tube in order and correct parts will be furnished without additional cost.

### PARTS FOR 1 TUBE HAZELTINE NEUTRODYNE CIRCUIT



**L518** Complete set parts, including instructions, finished cabinet, \$13.98. All the parts needed to build this circuit which is the leader of all circuits today. Tuning through intermediate. Easy to find stations sure they have been located. Brings to distant stations on the loud speaker in clear pure tones with wonderful volume. Essential parts included under HazelTine patents. Genuine bakelite panel, filling and wiring. With these parts you can easily build a high grade set at low cost. Note that all our prices are prepaid.

### PARTS FOR REINHARTZ CIRCUIT

**L562** Complete set of parts for one tube set, \$16.75.  
**L563** Complete set of parts for two tube set, \$17.95.  
One of the best circuits for bringing in distant stations. Can be built at very low cost yet produces fine results. Easy to handle. The three tube version has speaker volume on distant stations. One tube set has 7x14 panel, 3 tube set 7x21 panel. Panels are drilled for easy assembly. Complete with instructions for assembling.

### PARTS FOR 1 TUBE PHUSIFORMER CIRCUIT

**L586** Complete set of parts, including high grade cabinet \$13.95. One of the most efficient circuits known. Combines three stages of radio frequency and audio amplification. Brings in the distant stations with great volume and pure tones. Best grade parts furnished throughout. Genuine bakelite panel 7x21 or 7x24 drilled ready to mount parts. Complete instructions furnished for writing and assembling. Note that all our prices are transportation prepaid.

### ACME REFLEX CIRCUIT

**L582** Complete parts for 4 tube set, \$44.98.  
One of the most efficient circuits known. Combines three stages of radio frequency and audio amplification using only four tubes. Crystal detector gives unusual clarity. Genuine Acme Reflex circuit. High, radio and audio frequency transformers supplied. Genuine bakelite panel, size 7x21, drilled ready to mount parts. Complete with instructions for assembling.

### COCKADAY CIRCUIT

**L574** Complete parts, 1 tube set \$16.25.  
**L575** Complete parts, 3 tube set \$18.75.  
A very selective set that will tune out even nearby stations. A favorite circuit with many builders. One tube set has 7x14 panel, 3 tube 7x21. Panels are drilled for easy assembly. Instructions furnished for assembly.

### IMPROVED COCKADAY CIRCUIT

**L576** Complete parts for 5 tube set \$48.65.  
This is the latest model Cockadaya circuit with resistor coupled amplifier. Circuit with coil wound on bakelite tubing, highest grade grounded rotor low loss condenser and best grade parts throughout. 7x24 panel drilled ready to mount parts. Complete with instructions for assembling.

### COCKADAY PARTS

**L558** Per set, \$1.65.  
Complete set parts for Cockadaya circuit. Properly calculated and made to give best results in this new wonder circuit.  
**L576** Amples proof-order for Cockadaya Improved 5 tube circuit, \$1.18.

### PHUSIFORMER

**L586** Each, \$5.85.  
A new device especially designed for tuned radio frequency circuits. Consists of primary and secondary inductively coupled coils connected with variable condenser, all enclosed in moulded case with binding posts. Dial on shaft of condenser. Size 4 1/2 in. square, 2 in. thick. Three sets of small spools and can be used to make up a very efficient 5 tube set at low cost.

### ERLA REFLEX CIRCUITS

**L576** Complete parts, 1 tube set \$27.39.  
**L577** Complete parts, 2 tube set \$39.99.  
**L578** Complete parts, 3 tube set \$49.35.  
These circuits have opened a new field in radio. One tube does the work of three in an ordinary set, two equal to four, three equal five. Crystal detector improves quality of reproduction, preserving the full mellow tones of the original. Easily handled, will bring in distant well. All parts are genuine ERLA exactly as specified in ERLA circuits. Panels are drilled for easy assembly. One tube set has 6x7 panel, two tube 7x14, three tube 7x21.

### AMBASSADOR CIRCUIT

**L581** Complete parts for 3 tube set \$26.95.  
A three circuit set that is very selective and sensitive and brings in distant stations with excellent volume. Genuine Ambassador tuning coil wound throughout with Litz wire permits sharp tuning. Simulated to build and operate. Genuine bakelite panel, size 7x18, drilled ready to mount parts. Complete with instructions for assembling.

### MURDOCK FIVE TUBE NEUTRODYNE SET

**L579** Complete with tubes, batteries and accessories as listed below, \$135.50.  
A high grade, genuine five tube Neutrodyne set at an unusually attractive price. Manufactured under the HazelTine patents. Magnificent panel and finely finished mid mahogany cabinet, hand richens and shines to its appearance. Easy to tune. When station has been heard once and record made of dial setting you need only set dial at same point and if station is broadcasting it will be heard. Bring in distant stations loud and clear on loud speaker. Our price, which is transportation prepaid, includes the following: Set in cabinet, five C301A or UV201A tubes, 100 ampere hour storage "A" battery, two 45 volt "B" batteries, one Magdavit 344 loud speaker and complete antenna equipment consisting of wire, insulators, lightning arresters, etc.

### LICENSED NEUTRODYNE PARTS

**L552** Licensed Neutrodyne Kit, \$14.95.  
Includes a three tuned Neutrodyne, 2 Neutrodyns, panel layout, template and book of instructions for building up Neutrodyne set. By adding other parts a Neutrodyne can be built at low cost.

### Our Prices Are Prepaid

### TUNED RADIO FREQUENCY UNIT

**L553** Each, \$2.75.  
Three for \$7.95.  
Consists of radio frequency transformer wound on bakelite tubing and high grade variable condenser. For use in tuned radio frequency circuits. Usually used in sets of three. Condenser shaft 1/2 inch diam.

### BALANCING CONDENSERS

**L554** Pair, 70c.  
Field in pairs for neutralizing the capacity in two-stage radio frequency circuits.

### COILS FOR HARKNESS CIRCUIT

**L295** Per set of two \$1.95.  
Green silk windings on non-magnetic tubes. Properly calculated to give best results.

### SPIDER WEB COIL FOR REINHARTZ CIRCUIT

**L296** Each, \$1.05.  
A very unusual value. Made of green silk covered wire, spiderweb wound. 21 turns on 3/8 inch diameter. Mounting permits various styles of mounting. Directions included.

### Our Guarantee Protects You

### LARGE CAPACITY FIXED CONDENSERS

Tuned for use in the new radio circuits. Metal cases. Soldering tabs for connections. Best materials. Carefully made.  
**L358** .25 mfd. 55c. **L359** .5 mfd. \$1.05.  
**L360** 1. mfd. 85c. **L361** 2. mfd. \$1.35.

### RADIO SOLDERING IRON

**L548**... 36c.  
This guaranteed iron is exactly right for radio work. A hot solid connection quickly and easily made. Operates on any lighting current 100 to 120 volts. A 10 cord with attachment plug. Length 13 in.

### LONG NOSE PLIERS

**L579** Each, 85c.  
The handiest pliers for radio work. Made of fine hardened steel. Length 6 inches.

### DIAGONAL JAW NIPPERS

**L572** Each, 75c.  
For fine electrical work, made of hardened steel. Cuts wire clean in light places. Length 5 inches.

### LONG BLADE SCREWDRIVERS

**L567** 4 inch, 20c.  
**L568** 5 inch, 25c.  
**L569** 10 inch, 30c.  
Long narrow blade makes it easier to get in difficult places. Wood handle. Length given is over all.

### You Save Money When You Buy From Us

### MAGNET WIRE

Prices quoted are for 4 oz. spools unless otherwise stated. Prices are prepaid.

Double Cotton	Enamel	Wire	Single	Double
White	White	Size	Green	Green
<b>L596</b>	<b>L597</b>		<b>L592</b>	<b>L593</b>
35c	35c	10	35c	35c
40c	40c	20	40c	40c
45c	45c	30	45c	45c
50c	50c	40	50c	50c
55c	55c	50	55c	55c
60c	60c	60	60c	60c
65c	65c	70	65c	65c
70c	70c	80	70c	70c
75c	75c	90	75c	75c
80c	80c	100	80c	80c
85c	85c	110	85c	85c
90c	90c	120	90c	90c
95c	95c	130	95c	95c
1.00	1.00	140	1.00	1.00
1.05	1.05	150	1.05	1.05
1.10	1.10	160	1.10	1.10
1.15	1.15	170	1.15	1.15
1.20	1.20	180	1.20	1.20
1.25	1.25	190	1.25	1.25
1.30	1.30	200	1.30	1.30
1.35	1.35	210	1.35	1.35
1.40	1.40	220	1.40	1.40
1.45	1.45	230	1.45	1.45
1.50	1.50	240	1.50	1.50
1.55	1.55	250	1.55	1.55
1.60	1.60	260	1.60	1.60
1.65	1.65	270	1.65	1.65
1.70	1.70	280	1.70	1.70
1.75	1.75	290	1.75	1.75
1.80	1.80	300	1.80	1.80
1.85	1.85	310	1.85	1.85
1.90	1.90	320	1.90	1.90
1.95	1.95	330	1.95	1.95
2.00	2.00	340	2.00	2.00
2.05	2.05	350	2.05	2.05
2.10	2.10	360	2.10	2.10
2.15	2.15	370	2.15	2.15
2.20	2.20	380	2.20	2.20
2.25	2.25	390	2.25	2.25
2.30	2.30	400	2.30	2.30
2.35	2.35	410	2.35	2.35
2.40	2.40	420	2.40	2.40
2.45	2.45	430	2.45	2.45
2.50	2.50	440	2.50	2.50
2.55	2.55	450	2.55	2.55
2.60	2.60	460	2.60	2.60
2.65	2.65	470	2.65	2.65
2.70	2.70	480	2.70	2.70
2.75	2.75	490	2.75	2.75
2.80	2.80	500	2.80	2.80
2.85	2.85	510	2.85	2.85
2.90	2.90	520	2.90	2.90
2.95	2.95	530	2.95	2.95
3.00	3.00	540	3.00	3.00
3.05	3.05	550	3.05	3.05
3.10	3.10	560	3.10	3.10
3.15	3.15	570	3.15	3.15
3.20	3.20	580	3.20	3.20
3.25	3.25	590	3.25	3.25
3.30	3.30	600	3.30	3.30
3.35	3.35	610	3.35	3.35
3.40	3.40	620	3.40	3.40
3.45	3.45	630	3.45	3.45
3.50	3.50	640	3.50	3.50
3.55	3.55	650	3.55	3.55
3.60	3.60	660	3.60	3.60
3.65	3.65	670	3.65	3.65
3.70	3.70	680	3.70	3.70
3.75	3.75	690	3.75	3.75
3.80	3.80	700	3.80	3.80
3.85	3.85	710	3.85	3.85
3.90	3.90	720	3.90	3.90
3.95	3.95	730	3.95	3.95
4.00	4.00	740	4.00	4.00
4.05	4.05	750	4.05	4.05
4.10	4.10	760	4.10	4.10
4.15	4.15	770	4.15	4.15
4.20	4.20	780	4.20	4.20
4.25	4.25	790	4.25	4.25
4.30	4.30	800	4.30	4.30
4.35	4.35	810	4.35	4.35
4.40	4.40	820	4.40	4.40
4.45	4.45	830	4.45	4.45
4.50	4.50	840	4.50	4.50
4.55	4.55	850	4.55	4.55
4.60	4.60	860	4.60	4.60
4.65	4.65	870	4.65	4.65
4.70	4.70	880	4.70	4.70
4.75	4.75	890	4.75	4.75
4.80	4.80	900	4.80	4.80
4.85	4.85	910	4.85	4.85
4.90	4.90	920	4.90	4.90
4.95	4.95	930	4.95	4.95
5.00	5.00	940	5.00	5.00
5.05	5.05	950	5.05	5.05
5.10	5.10	960	5.10	5.10
5.15	5.15	970	5.15	5.15
5.20	5.20	980	5.20	5.20
5.25	5.25	990	5.25	5.25
5.30	5.30	1000	5.30	5.30

### BAKELITE TUBING

Genuine bakelite tubing. Prices 3 inches long only.  
**L585** Inside dia. 3/4 in. 20c.  
**L586** Inside dia. 1 in. 35c.  
**L587** Inside dia. 1 1/4 in. 30c.  
**L588** Inside dia. 1 1/2 in. 45c.

### JACK SWITCHES

**L286** T. W. 0. Springs. Usually used as "A" battery switch. Each, 47c.  
**L287** Three springs. For switching from long to short wave, from one battery to another, etc. Each, 55c.

### FADA 5 TUBE KNOCK DOWN NEUTRODYNE SET

**L517** Without cabinet, \$49.99.  
Consists of all parts necessary to build a high grade receiver capable of receiving over long distances. All parts are genuine Fada, well known for their high quality and efficiency. Part include a 7x14 genuine bakelite panel drilled and engraved, loudspeaker for mounting parts, tuned transformers and supporting components. Complete instructions for assembling.

### CABINETS

Five looking cabinets built. 1. Large 2. Small 3. Medium 4. Large 5. Small. You will be proud of your set mounted in one of these cabinets. Hinged top. Panel fits flush in front. Panels not included. Inside depth 7 inches except 5x14, 12x14, 12x21, which are 10 in. deep. Prices quoted are prepaid and are the lowest ever offered on quality cabinets.

### BASE BOARDS FOR CABINETS

Fasten to bottom of panel and fit inside cabinet. 1/4 inch thick, 6 1/4 inches wide.

### DE LUXE CABINET

The finest quality cabinet. A piece of furniture worthy of the best set. Made of genuine walnut in elegant hand rubbed natural walnut or brown mahogany finish. State which is wanted. Top has piano hinged and lid support. Feet at base and striking appearance. Inside depth 9 inches.

### CONSOLE RADIO CABINET

**L582** Prepaid, \$127.50.  
A high grade piece of furniture. Neat appearance. Elegant finish. Looks well with any home furnishings. Top compartment takes any set or panel size 5 in. high, 10 in. deep, 33 in. long or smaller. Lower compartment holds batteries, chargers and all accessories. Can be entirely closed and locked. Strong durable construction. Finished inside. Fine mahogany or walnut finish. Size over all, 37 in. wide, 14 in. deep, 42 in. high.

### DUBILIER MICADON SET

Consists of a Type 601 condenser with brackets designed to fit over terminals on audio frequency transformers, binding posts, etc.  
**L582** 601 mfd. 40c. **L583** 6025 mfd. 40c.  
**L584** 603 mfd. 40c. **L585** 6025 mfd. 40c.

### INDUCTANCE COILS (Moneycocks)

Carefully made—fine looking coils. Low resistance. High self inductance. Very firm impregnation. Mounted on coils have standard plug mountings. Specify when ordering whether mounted or unmounted type is wanted.  
**L586** 200 mfd. 40c. **L587** 6025 mfd. 40c.  
**L588** 603 mfd. 40c. **L589** 6025 mfd. 40c.

### Our Prices Are Prepaid

### INDUCTANCE COIL MOUNTINGS

**L389** 3 Coil \$1.75 **L391** 2 Coil \$1.25.  
Made of polished brass bakelite. Mount on front of panel.  
**L392** Mounts back of panel, with knobs on dial on front of panel. Takes 3 coils of any size. Each, \$1.75.

### You Save Money When You Buy From Us

### BATTERY METERS

**L589** Each, 85c.  
Reads 0 to 50 volts. Accurately tells you condition of "B" Battery. Convenient watch size. Tests 22 1/2 and 45 volt batteries.  
**L590** Combination meter. \$1.39.  
Reads 0-50 volts; 0 to 35 amperes. Tests "B" and "A" dry cells.

### TINOL

**L592** Per tube, 30c.  
A complete solder and flux in handy form. Put a little on the junctions, heat with a match, torch or solder iron and you have a neat electrically and mechanically perfect joint.

The Very Latest  
**Radio Book**  
Free  
This Book Full of Radio Bargains.  
Shows Big Savings on parts, sets and accessories.  
Our prices are lowest on highest quality standard goods.  
Send for your copy today  
ALL ORDERS SHIPPED SAME DAY RECEIVED

### STORAGE "A" BATTERY

The best battery buy on the market. Guaranteed for three years. Made of best new materials. Full capacity. Try one of these batteries for 30 days. If at the end of that time you are not fully satisfied return it and we will refund the purchase price. Note our prices are prepaid. Transportation cost included. These are the lowest prices obtainable. We deliver this high quality battery to you for less than the cost of inferior batteries.  
**L594** 6 volt, 60 amp. size. Each, \$5.90.  
**L595** 6 volt, 100 amp. size. Each, \$12.39.

### BATTERY CHARGER


Connect charger to 110 volt 50 cycle light socket and your battery charges automatically every night at a cost of only a few cents. Cord and clips for connection included.  
**L591** For 6 volt battery, \$12.95.  
**L592** For 12 volt battery, \$17.95.  
Noless Rectifier Built Charger—  
Transformer for connection. Includes:  
**L593** 2 amp. \$15.95 **L594** 5 amp. \$24.95  
Extra Bulbs  
**L595** 2 amp. \$1.95 **L596** 5 amp. \$7.48

### HYDROMETER

**L596** Each, 40c.  
High keep battery in better shape by showing exact condition.

### Our Guarantee Protect



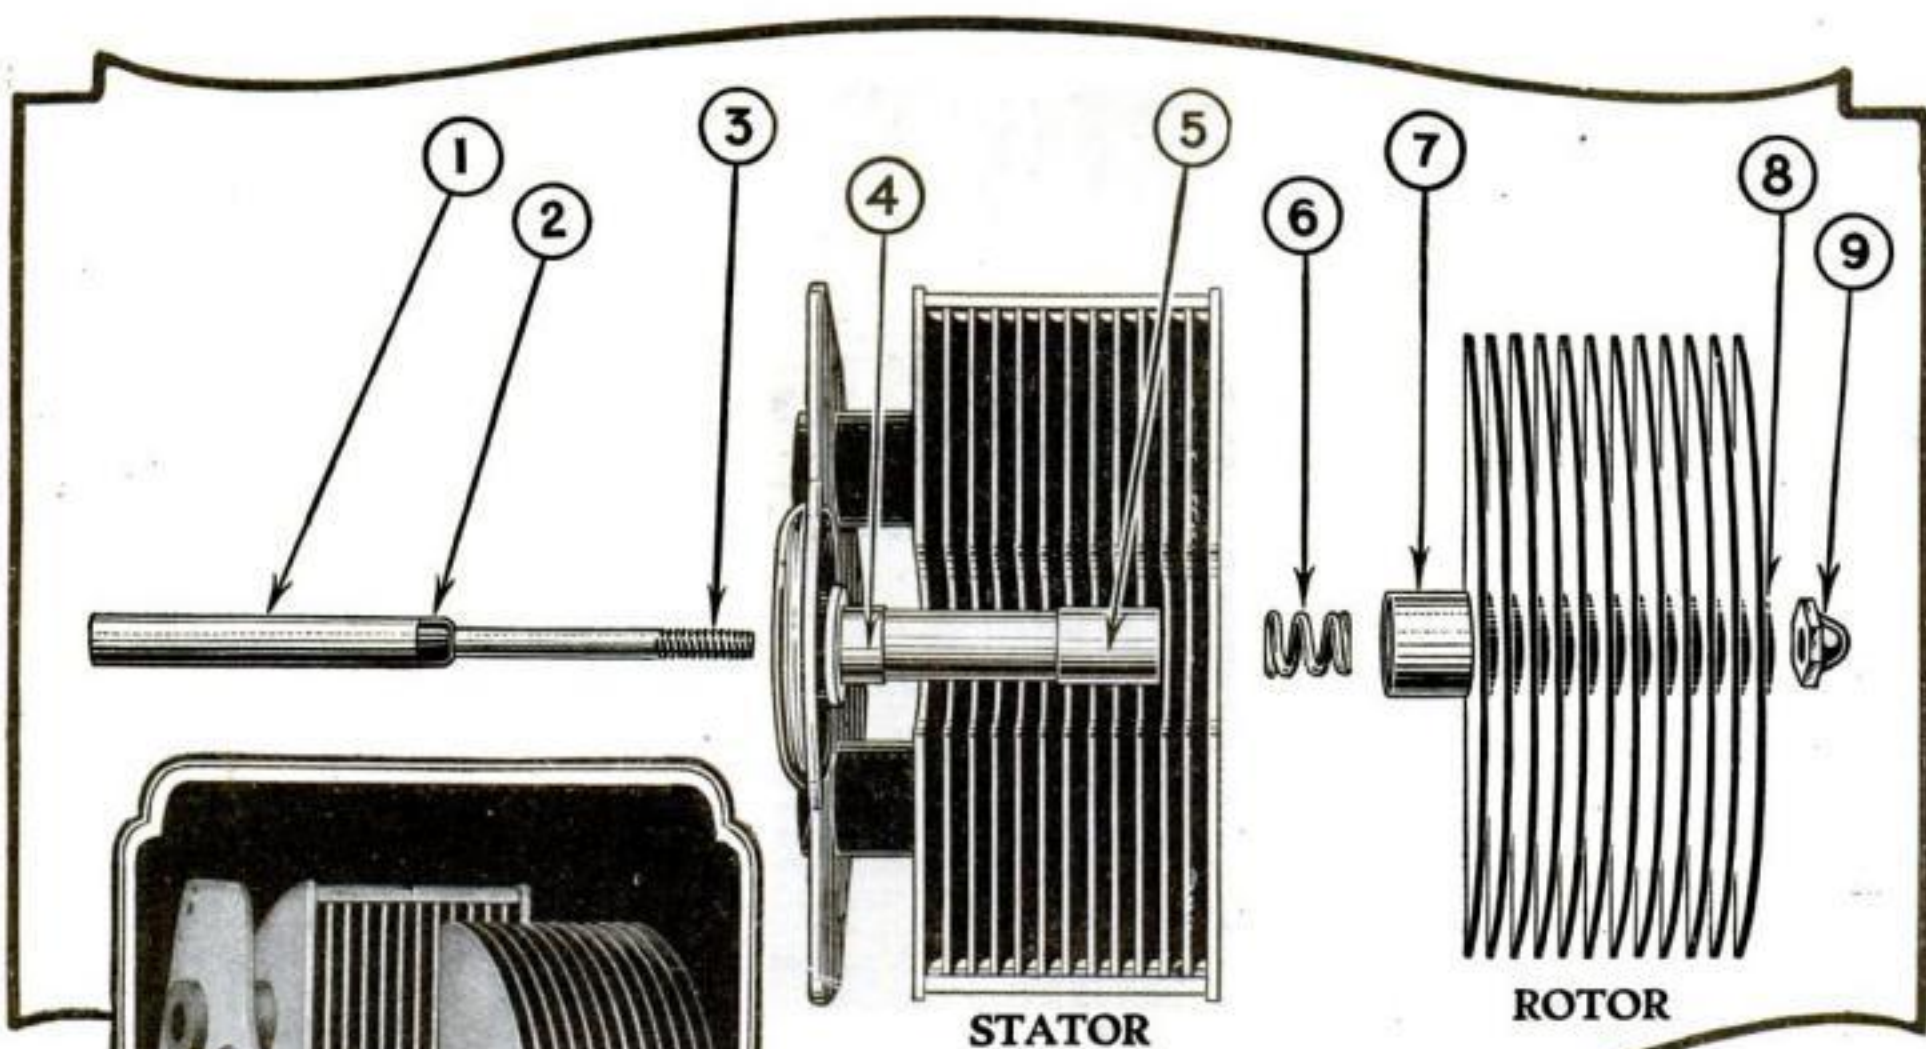


## The Condenser with the "full floating axle"

The striking feature of the Bradleydenser is the rigid double bearing, based on the principle of the "full-floating" automobile axle, that eliminates the usual outer pivot-bearing for the rotor shaft, and still provides a non-sagging support that insures perfect alignment of the rotor plates.

The rotor plates, soldered on a long, hollow tube extending from [7] to [8], revolve on a hollow steel stem provided with *two* bearings [4] and [5]. The alignment and support of the rotor is independent of the condenser shaft [1], as shown by the first photograph at the left. The shaft [1] merely turns the rotor. It slips through the hollow steel stem and its threaded end [3] is secured to the rotor at [8] with the nut [9] as shown in the second photograph. The spring [6] prevents end-play.

This design, combined with the use of soldered brass plates, results in a rugged, long-life condenser of extremely high efficiency. For superior service use the Bradleydenser.

A Full-Floating  
Automobile Axle

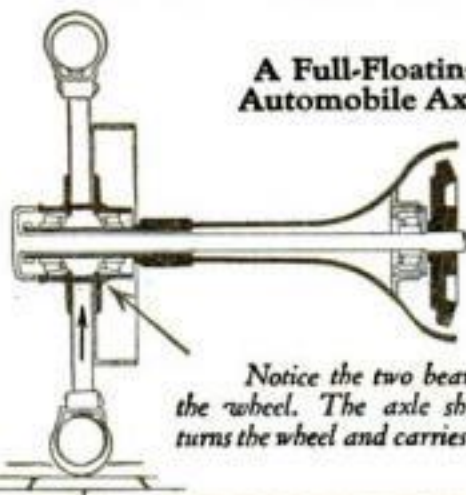

Notice the two bearings for  
the wheel. The axle shaft only  
turns the wheel and carries no load.

**Allen-Bradley Co.**  
Electric Controlling Apparatus

©

General Office and Factory: 293 Greenfield Ave., Milwaukee, Wisconsin

# Bradleydenser

## PERFECT VARIABLE CONDENSER



# Combines distance, selectivity, power, deep full tone, beauty and simplicity!

Looks like—and performs like—a \$200 radio set



**BUILT TO GIVE LOUD SPEAKER ENTERTAINMENT FROM STATIONS THOUSANDS OF MILES DISTANT WHILE LOCAL STATIONS ARE BROADCASTING**

## "Coast to Coast" reception verified by Miraco Users

**NOTE!** Do not judge Miraco sets by their prices. Enormous production makes them cost less. They are built—by pioneer set makers—of highest grade parts. They embody improvements, refinement and features used in the most costly sets. Every Miraco user is an enthusiastic booster—these letters are typical of the many we receive.

### Oklahoma Hears Europe

Nov. 27th, was able to get two of the foreign stations on my Miraco, also Porto Rico and Guatemala, Mexico.—W. J. Lowe, Verdun, Okla.

### Michigan Hears Germany

My Miraco is working fine. Nov. 28th I got 5NO, Newcastle, England, and LP, Berlin, Germany. Can you beat that record?—Thomas Walker, Howell, Mich.

### Pennsylvania Hears Paris

Believe Miraco the best distance-getter on the market for the price. Nov. 24th I picked up Paris, also Havana, Cuba, and San Juan, Porto Rico. Nov. 25 I picked up 5NO, Newcastle, England. Nov. 27th got 5NO and 2BD Aberdeen, Scotland. Now have 98 other stations on my log to date including KGO, Oakland, Calif.—Earl C. Way, Coleman, Pa.

### Indiana Hears Europe Nightly

During the European test I had some foreign station every night on my Miraco. Nov. 22nd I also heard New York, Los Angeles, Canada, Texas and 31 others.—C. J. D. Rudolph, Evansville, Ind.

### Kansas Hears Coast to Coast

Am using a Miraco and will let the following list of stations tell what I think of your sets. These are not all the stations I have tuned in as I do not "log" a station unless I hear it at least twice. The unrecorded stations include several in Canada, two in Mexico and one in Cuba. Expect to do better still: KHJ, KFI, Los Angeles; KGO, Oakland, Cal.; KPO, KVO, San Francisco; WBZ, Springfield, Mass.; WGY, Schenectady, N. Y.; WOO, Philadelphia; WBB, Atlanta, Ga.; KFDX, Shreveport, La.; WOAI and WCAE, San Antonio, Tex.; WFAA and KFOP, Dallas, Tex.; WBAF, Ft. Worth, Texas; WWJ, Detroit; WMC, Memphis, Tenn.; WSAI and WLW, Cincinnati; WBT, Charlotte, N. C.; WGR, Buffalo; WBAH, Minneapolis; WCAE, Villanova, Pa.; KSD, St. Louis; WOAW, Omaha; KOKA, Pittsburgh; WBBH, KYW, WGN and WMAQ, Chicago; WTAS, Elgin, Ill., and twenty others in Missouri, Kansas, Iowa, Illinois, Minnesota, Nebraska and Oklahoma.—J. A. West, Augusta, Kansas.

### Michigan Hears 180 Stations

Am sending list of stations I received on my Miraco in 3 weeks. KDKA, KDFM, KFCH, KEVY, KFPA, KFDU, KFHE, KFI (Los Angeles), KOP, KOL, KRE, WAAD, WAAF, WABJ, WRAD, WBRA, WBZ, (Springfield, Mass.), WCAE, WCAI, WCAE, WCAP, WCAS, WCHD, WCK, WCN, WCN, WDAE, WDAF, WDAJ, WDAK, WGN, WDT, WIZ, WEAF, WEAL, WEAN, WEAQ, WFAA, (Dallas, Tex.), WFAF, WFAV, WFL, WGAN, WGAY, WGAZ, WGL, WGM, WGR, WHA, WGY, WHAL, WHAR, WHAZ, WHK, WIP, WJAJ, WJAN, WJAR, WJAS, WBBH, WLAY, WLW, WMAJ, WNAC, WNAQ, WOA, WOC, WOO, (Philadelphia), WOS, WPAZ, WPAZ, WPG, WPI, WQAJ, WSAI, WSY, WTAG, WTAS, WTG, WWJ, WTAI, WLAC, WEN, (New York City), WDL. This is all the list I have on hand. At the house I have 180 in all.—Howard L. Goodrich, Clinton, Mich.

# The Marvelous MIRACO Ultra 5

costs only \$75

[FIVE TUBE OUTFIT IN BEAUTIFUL SOLID MAHOGANY CASE]

Send Coupon for SPECIAL OFFER

Completely built, thoroughly tested and factory guaranteed by one of America's oldest and most reliable manufacturers of quality sets! Years of experience and quantity production explain its almost incredible price. Users, who have deluged us with commendations, say that friends who see and hear it are amazed that it sells for less than \$150 or \$200. Radio experts, who know good construction and quality parts, are equally astonished. You, too, will be delighted, thrilled, amazed with your big five-tube Miraco "Ultra 5" in its beautiful hand-rubbed solid mahogany cabinet! You'll be envied by radio friends who paid big prices for their outfits. Imagine getting all this for \$75—a beautiful sweet

toned "coast to coast loud speaker" set, composed of finest parts, housed in solid mahogany, equipped with the latest improvements, refinements and features found on costliest sets—and factory guaranteed! An instrument approved by radio's highest authorities! A set anyone can connect and operate. Even beginners learn quickly to cut through the "locals," get distant stations loud and clear, log stations and return to them at will. (Full directions with each set.) It is non-radiating, non-distorting, non-howling. Has cut-out switch—and a first stage phone jack for tuning—on Bakelite panel. All wiring concealed under Bakelite sub-base. Works on storage battery or dry cells. Literature describes other newest features.

## Other Miraco Long Distance Sets \$14<sup>35</sup> up



Users tell us that Miraco Model R justly deserves its title, "Radio's finest low priced quality receiver." One tube acts as a tuned radio frequency amplifier and detector combined. A great distance getter. Easy to operate and log. Covers all wave lengths 150 to 625 meters. Like all Miraco sets, it operates on a storage battery or dry cells. Never such value before at only \$14.35 report delighted users.

**MIRACO RADIO GETS 'EM COAST TO COAST**

This wonderful new Miraco Model R-3 is the three-tube, long distance, loud speaker set that has created such a sensation. Easy to tune and log. Covers wave lengths 150 to 625 meters. Detector acts also as a tuned radio frequency amplifier, 2 stages audio frequency amplification. Unsurpassed for simplicity, volume, range or clearance at anywhere near its price.



Miraco R-3 only \$29.50

The famous Miraco Model MW four tube "coast to coast loud speaker" outfit which users all over the country report outperforms and outdistances much costlier sets. Comes in a solid mahogany cabinet. The improved 1925 model is equipped with cut-out switch, first stage phone jack for tuning (removing plug automatically switches program to loud speaker) and other latest features. Employs one stage of radio frequency amplification, detector and two stages of audio frequency amplification. Another unmatched Miraco value, \$54.50.

These Miraco sets are as easy as a phonograph to operate. Built throughout of highest grade parts. Full directions for connecting and operating supplied with each set. No experience necessary. The three and four tube sets have cut-out switch and first stage phone jack. Each set completely built, thoroughly tested and factory guaranteed.



## All the Proof you want is waiting for You!

Reports from the many users in every state prove Miraco Tuned Radio Frequency Receivers—at rock bottom prices—have efficiency of sets costing up to three times as much. Remember that Miraco Sets are the product of a long established, reputable manufacturer—pioneer builders of sets. Send for further evidence that Radio offers no finer moderately priced receivers. All Miraco sets bear the endorsement of radio's highest authorities. Mail coupon now for latest bulletins and plenty of additional testimony from users leaving no doubt that "Miraco Radio Gets 'em Coast to Coast."

### DEALERS! JOBBERS!

Write for the new Miraco proposition. Nation-wide use and popularity of Miraco Sets, their amazingly low prices and our extensive advertising, makes them wanted everywhere. Send coupon.

### AGENTS!

The wonderful tone, volume and distance-getting ability of Miraco Sets makes them easy to sell. Send coupon for proposition; good territory open.

Send coupon for free bulletins

[or order direct from this ad]

## MIDWEST RADIO CORPORATION Pioneer Builders of Sets



Cincinnati, Ohio

408-T East Eighth Street

Send free literature, your special offer, and all particulars regarding Miraco Sets. ☐ Jobber. ☐ Dealer. ☐ Agent. ☐ User.

Name .....

Address .....



# WURLITZER

THE WORLD'S LARGEST MUSIC HOUSE



## New Offer!

### Learning to Play Made Easy

What instrument would you like to play? Through our New Offer you can learn to play it quickly and easily—in your own home and without expensive teachers.

**FREE** With every Wurlitzer instrument we now furnish a Free Scholarship Certificate. This scholarship entitles you to free tuition in the foremost correspondence school of music in the country—a school that has successfully taught thousands to play their favorite instruments. Think of the pleasure music will bring you. Choose your instrument and send for this New Offer today.

### Free Trial—Easy Payments

You may have any Wurlitzer instrument for a week's free trial in your own home. No obligation to buy. See for yourself the superior quality of these famous instruments, the result of 200 years' experience in musical instrument building. Masters in every sphere of music praise Wurlitzer instruments for artistic quality, rich tone values and fine workmanship. Payments are arranged in convenient small monthly sums—a few cents a day will pay for your instrument.

### Send for Free Book

Every known musical instrument described and illustrated—many shown in full colors. More than 3,000 articles. All genuine Wurlitzer instruments—buy direct from Wurlitzer and save money. Special offers on complete outfits; also full details of our Free Trial—Easy Payment plan and New Free Scholarship Offer. Book is free—no obligation. Send for it TODAY.

Send this  
Coupon →

THE RUDOLPH WURLITZER CO., Dept. 1782  
120 W. 42nd St., New York 117 E. 4th St., Cincinnati  
329 S. Wabash Ave., Chicago 250 Stockton St., San Francisco  
Send me your Free Book on Musical Instruments with details of Free Trial—Easy Payment plan and New Free Scholarship Offer. No obligation.

Name.....

Address.....

City..... State.....

Instrument.....